

The DWL2-LED30 is a sleek LED wall light with a slim profile and a rounded frosted lens that provides optimal light distribution.



### APPLICATIONS

**Ideal for lighting entrances, narrow aisles, walkways, facades in a variety of residential, commercial and industrial applications.**

<b>Project</b>	
<b>Type</b>	
<b>Date</b>	
<b>Notes</b>	

### SPECIFICATIONS

#### Construction

The DWL2-LED30 is made from durable polycarbonate housing, has a frosted lens and a reflector to limit light losses. The fixture has an elegant looking curved contour with a slim profile of 4.4" from the wall. Unit has a cast aluminum back plate for optimal heat sinking,

#### Mounting

The DWL2-LED30 has two conduit entries, one on the bottom and one at the back and mounts directly onto the wall.

#### Finish

Bronze.

#### LED Configuration

Each fixture contains one high efficiency Chip on Board (COB) that delivers a total lumen output of 3,342 lumens at an efficacy of minimum 110 lumens/watt. This serves as an ideal replacement for a 100W MH fixture.

#### Electrical

Total system wattage of the unit is 31W. The standard unit has a high efficiency driver that operates at 120V.


#### Photocell

Included.

<b>Fixture Watts</b>	<b>31W</b>
<b>Lumens</b>	<b>3,342</b>
<b>Efficacy</b>	<b>110 lumens/watt</b>

<b>Rated Life</b>	<b>100,000 hours</b>
<b>Certification</b>	<b>cULus, DLC</b>
<b>Colour Temperature</b>	<b>5000K (standard)</b>
<b>Warranty</b>	<b>5 Years</b>
<b>Ideal Mounting Height</b>	<b>8' - 12'</b>
<b>Operating temperature</b>	<b>-40°C to +40°C</b>

### DIMENSIONS

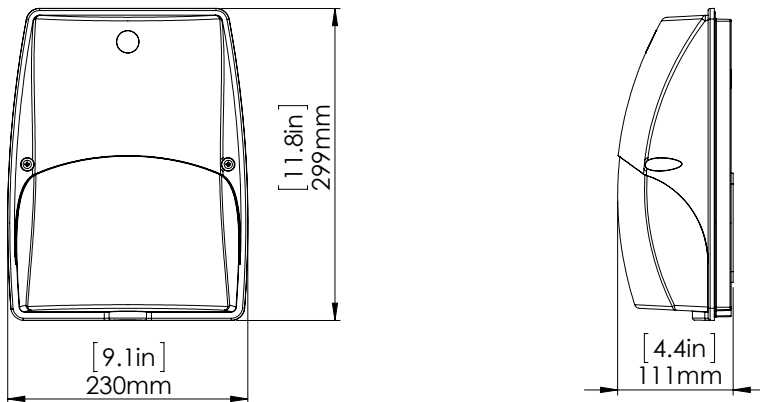

ORDERING GUIDE

<b>DWL2</b>	-	<b>LED30</b>	-	<b>A</b>	-	<b>5K</b>	-	<b>BRZ</b>	-	<b>PC</b>
				<b>VOLTAGE</b>		<b>COLOUR TEMP</b>		<b>FINISH</b>		<b>PHOTOCELL</b>
				<b>A - 120 *</b>		<b>5K - 5000K*</b>		<b>BRZ- BRONZE*</b>		<b>PC - PHOTOCELL*</b>

\* Standard configuration