



# VP4-LED35

LED Narrow Linear Vapourproof

## SPECIFICATIONS\*

Watts	35W
Lumens	4416
Efficacy (Lm/W)	126
Replaces Up To	2 Lamp T8
Colour Temp.	4000K, 5000K
Certification	cULus, IP65, DLC
Operating Temp.	-30°C to +40°C
Voltage	120-277
LED Life	100,000 hours
Housing Material	Polycarbonate
Lens Material	Polycarbonate
Lens Type	Frosted
Mounting	Surface mount
Total Harmonic Distortion	11.14%
Power Factor	0.9555
CRI	84



## DESCRIPTION

The VP4 is a four foot linear vapourproof fixture ideal for use in wet locations both indoors and outdoors in parking garages, commercial and industrial facilities. Not for use in car wash facilities.

## APPLICATIONS



Parking  
Garages



Commercial  
Facilities



Industrial  
Facilities


## FEATURES

- 4' narrow linear vapourproof fixture.
- Polycarbonate housing with frosted lens.
- 10 polycarbonate clips for locking lens to the housing.
- 0-10V Dimming is standard.
- Predrilled conduit entries for ease of installation.
- Folding junction box cover in white paint finish included.
- Adjustable stainless steel mounting brackets.


\*The above specs apply to the VP4-LED35-B-4K-DIM. For spec information on other product configurations please see page 3.

**PHOTOMETRICS**

**VP4-LED35-B-4K-DIM  
MOUNTED AT 8 FEET**

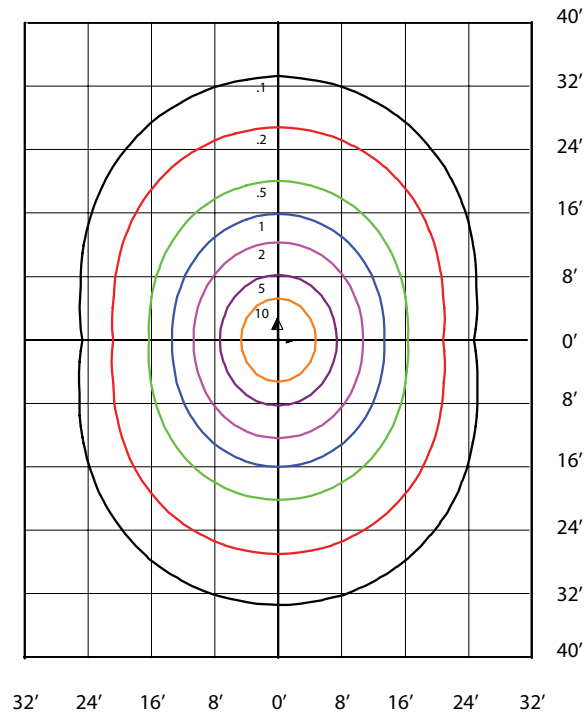

**DIMENSIONS**

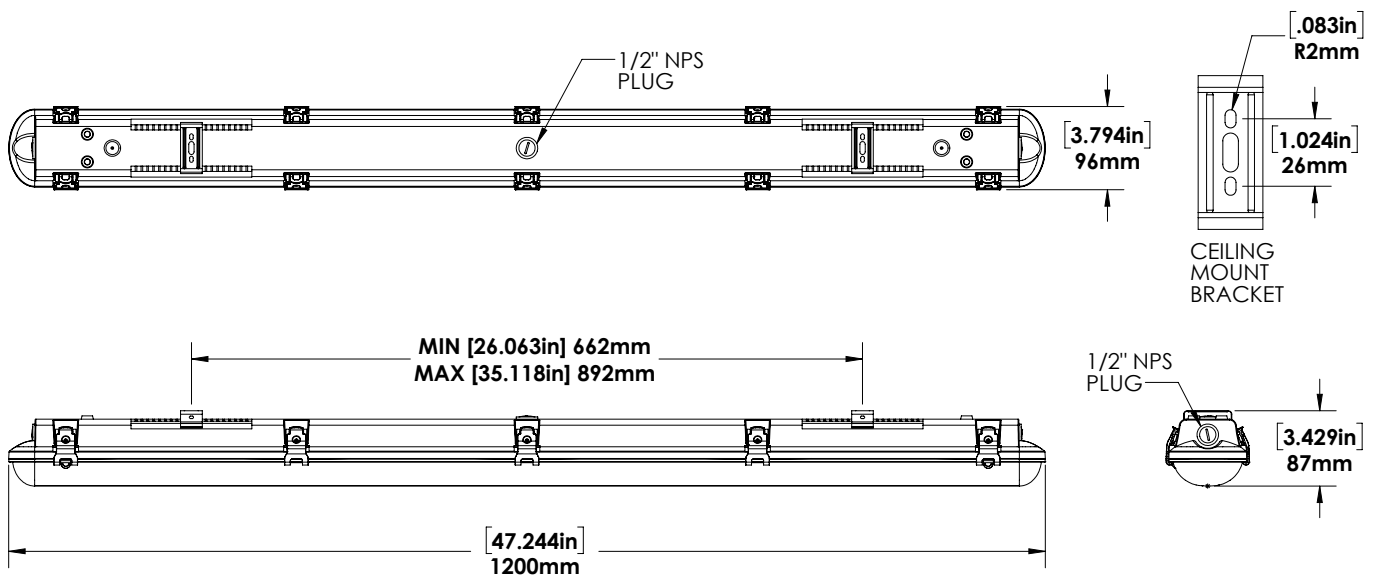

## OTHER MODEL SPECIFICATIONS

DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT (Lm)	EFFICACY (Lm/W)	THD (%)	PF	CCT (K)	CRI
VP4-LED35-B-4K-DIM	120-277	35.01	4415.8	126.13	11.14	0.9555	4000	84
VP4-LED35-B-5K-DIM	120-277	35.11	4605	131.159	10.56	0.9544	5000	83.4

### LEGEND

B - 120V-277V  
 4K - 4000K, 5K - 5000K  
 DIM - 0-10V Dimming

## ORDERING GUIDE

<b>VP4</b>	<b>LED35</b>			
WATTS	VOLTAGE	COLOUR TEMP.	DRIVER	
	B - 120 - 277V	4K - 4000K 5K - 5000K	DIM - 0-10V Dimming	

## ACCESSORIES (SOLD SEPARATELY)

092864 VP4-LED SST CLIPS KIT  
 (STAINLESS STEEL CLIPS  
 KIT - 10 CLIPS)