


PXSS2KREX

**PXSS2KREX GLOBALLY APPROVED,
EXPLOSIVE ATMOSPHERE RAPIDEX BARRIER CABLE GLAND**

FOR ALL TYPES OF UNARMoured CABLES & BRAIDED CABLES

- RapidEx liquid pour sealing system reduces installation time
- Direct and remote installation
- Superior levels of cable retention
- Displacement type environmental seal
- Deluge protected
- Disconnectable, union feature design
- -60°C to +85°C
- Globally marked, cULus, cCSAus, IECEx and ATEX
- As standard in nickel plated brass
- RapidEx liquid barrier resin seals around internal cable cores after removing any cable inner sheath/bedding; completely eliminating any risk of coldflow



SUPPLIED IN PACK WITH RAPIDEX RESIN


TECHNICAL CLASSIFICATION

DESIGN SPECIFICATION	BS 6121: Part 1:1989, IEC 62444, EN 62444
MECHANICAL CLASSIFICATION*	Impact = Level 8, Cable Anchorage = Type B
ENCLOSURE PROTECTION	IK10 to IEC 62262 (20 joules) Brass and Stainless Steel only
INGRESS PROTECTION RATING**	IP66, IP67 and IP68****
NEMA RATING**	Type 4X
DELUGE PROTECTION COMPLIANCE	DTS01 : 91
CABLE TYPE	Unarmoured***
SEAL MATERIAL	CMP SOLO LSF Halogen Free Thermoset Elastomer / RapidEx Barrier Compound
SEALING TECHNIQUE	CMP Outer Displacement Seal and Inner RapidEx Barrier Seal
SEALING AREA(S)	RapidEx Resin Barrier and Cable Outer Sheath
CABLE GLAND MATERIAL	Brass, Electroless Nickel Plated Brass, Stainless Steel, Aluminium

* Mechanical and Electrical Classifications applied as per IEC 62444 and EN 62444 ** When CMP installation accessories are used. Refer to www.cmp-products.com for further information.

Where the cable is permitted by code (NEC and/or CEC) * IP68 tested to a minimum depth of 30 metres for 12 hours, alternative depths / durations can be provided upon request.

PATENT GRANTED: ES 2287986, NO 2287986, TR 2287986, AU 2010284848, AU 2014274614, GB 2485114, SG 178839, US 8872027, US 9484133, US 9774178, MY 153846, US 10193321, US1034078

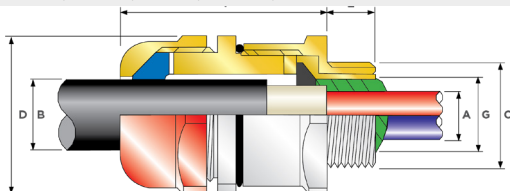

GLOBAL PRODUCT CERTIFICATION

ATEX CERTIFICATE	CML18ATEX1325X, CML18ATEX4317X	IECEx CERTIFICATE	IECEx CML 18.0182X
CODE OF PROTECTION	II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da II 3G, Ex nR IIC Gc I M2 Ex db I Mb*, Ex eb I Mb*	CODE OF PROTECTION	Ex db IIC Gb, Ex eb IIC Gb, Ex nR IIC Gc, Ex ta IIIC Da, Ex db I Mb*, Ex eb I Mb*
COMPLIANCE STANDARDS	EN 60079-0, 1, 7, 15, 31	COMPLIANCE STANDARDS	IEC 60079-0, 1, 7, 15, 31
cCSAus CERTIFICATE	2288626		
CSAus CODE OF PROTECTION**	Class I, Div 1 and 2, Groups A, B, C, and D; Class II, Div 1 and 2, Groups E, F, and G; Class III, Div 1 and 2; Type 4X; Oil Resistance II; Class I, Zone 1, AEx d IIC Gb, AEx e IIC Gb; Class I, Zone 2, AEx nR IIC Gc; Class I, Zone 2, AEx ta IIIC Da		
cCSA CODE OF PROTECTION**	Class I, Div 1 and 2, Groups A, B, C, and D; Class II, Div 1 and 2, Groups E, F, and G; Class III, Div 1 and 2; Type 4X; Oil Resistance II; Ex d IIC Gb, Ex e IIC Gb, Ex nR IIC Gc, Ex ta IIIC Da		
COMPLIANCE STANDARDS	CAN/CSA-C22.2 No 0, 18, 25, 30, 174, 94; CAN/CSA-C22.2 No 60079-0, 7, 15, 31; CAN/CSA-E61241-1-1; ANSI/UL 514B, 50, 2225; ANSI/ISA 60079-31; UL 60079-0, 1, 7, 15		
cULus CERTIFICATE (205 - 90)	E161256		
CODE OF PROTECTION**	Class I, Div 1 and 2, Groups A, B, C, and D; Class II, Div 1 and 2, Groups F and G		
COMPLIANCE STANDARDS	UL 2225, UL 514B, UL 60079-0, UL 60079-7, CSA C22.2 No. 174		
ECAS CERTIFICATE	20-02-05624	UKREPO CERTIFICATE	CL1 19.0371X
EAC CERTIFICATE	TC RU C-GB.AA87.B.00487	CCC CERTIFICATION	2020322313003190
RETIE APPROVAL NUMBER	03866	CCOE / PESO (INDIA) CERTIFICATE	P444949
MARINE APPROVALS	LRS: 01/00172, DNV: TAE000000Y, ABS: 20-LD1948801-PDA, BV: 43180 A1 BV		

* Per ATEX CML 18ATEX1325X and IECEx CML 18.0182X, aluminum alloys are not permitted in Group I mining applications **Where the cable is permitted by code (NEC and/or CEC)

COMBINED ORDERING REFERENCE			AVAILABLE ENTRY THREADS 'C' (ALTERNATIVE METRIC THREAD LENGTHS AVAILABLE)					NUMBER OF CORES	DIAMETER OVER CONDUCTORS 'A'	CABLE BEDDING DIAMETER 'G'	OVERALL CABLE DIAMETER 'B'		ACROSS FLATS 'D'	ACROSS CORNERS 'D'	PROTRUSION LENGTH 'F'	SHROUD	CABLE GLAND WEIGHT (kg)
			STANDARD			OPTION											
SIZE	TYPE	ORDERING SUFFIX	METRIC	THREAD LENGTH 'E'	NPT	THREAD LENGTH (NPT) 'E'	NPT	MAX	MAX	MAX	MIN	MAX	MAX	MAX			
20S16	PXSS2KREX	1RA	M20	15.0	½"	19.9	¾"	21	8.6	8.6	3.1	8.6	30.0	33.0	53.1	PVC06	0.200
20S	PXSS2KREX	1RA	M20	15.0	½"	19.9	¾"	21	11.7	11.7	6.1	11.7	30.0	33.0	53.1	PVC06	0.200
20	PXSS2KREX	1RA	M20	15.0	½"	19.9	¾"	21	12.6	12.9	6.5	14.0	30.0	33.0	54.2	PVC06	0.200
20L	PXSS2KREX	1RA	M20	15.0	½"	19.9	¾"	21	12.6	12.9	10.0	15.9	30.0	33.0	54.2	PVC06	0.200
25	PXSS2KREX	1RA	M25	15.0	¾"	20.2	1"	30	17.5	17.9	11.1	20.0	36.0	39.6	60.0	PVC09	0.330
32	PXSS2KREX	1RA	M32	15.0	1"	25.0	1 ¼"	50	23.6	23.9	17.0	26.3	41.0	45.1	61.1	PVC10	0.590
32L	PXSS2KREX	1RA	M32	15.0	1"	25.0	1 ¼"	50	23.6	23.9	20.0	27.4	41.0	45.1	61.1	PVC10	0.590
40	PXSS2KREX	1RA	M40	15.0	1 ¼"	25.6	1 ½"	59	30.0	30.3	22.0	32.1	50.0	55.0	62.4	PVC13	0.560
50S	PXSS2KREX	1RA	M50	15.0	1 ½"	26.1	2"	89	36.6	36.9	29.5	38.2	55.0	60.5	65.2	PVC15	0.660
50	PXSS2KREX	1RA	M50	15.0	2"	26.9	2 ½"	89	41.0	41.3	35.6	44.0	60.0	66.0	67.6	PVC18	0.730
63S	PXSS2KREX	1RA	M63	15.0	2"	26.9	2 ½"	115	47.9	48.4	40.1	49.9	70.0	77.0	71.1	PVC21	1.070
63	PXSS2KREX	1RA	M63	15.0	2 ½"	39.9	3"	115	53.7	54.0	47.2	55.9	75.0	82.5	70.4	PVC23	1.060
75S	PXSS2KREX	1RA	M75	15.0	2 ½"	39.9	3"	140	59.9	60.2	52.8	61.9	80.0	88.0	75.3	PVC25	1.300
75	PXSS2KREX	1RA	M75	15.0	3"	41.5	3 ½"	140	64.3	64.2	59.1	67.9	85.0	93.5	74.9	PVC27	1.300
90	PXSS2KREX	1RA	M90	20.0	3 ½"	42.8	4"	140	75.3	75.6	66.6	79.4	108.0	118.8	94.8	PVC31	3.020
100	PXSS2KREX	1RA	M100	20.0	3 ½"	42.8	4"	200	85.6	85.9	76.0	90.9	123.0	135.3	86.3	LSF33	4.000

*For material options add the following suffix to the ordering reference; Brass (no suffix required); Nickel Plated Brass 'S'; 316 Grade Stainless Steel '4'; Copper Free Aluminium '1'

For NPT options add the following digits to the material suffix; 1/2" = 31; 3/4" = 32; 1" = 33; 1 1/4" = 34; 1 1/2" = 35; 2" = 36; 2 1/2" = 37; 3" = 38; 3 1/2" = 39; 4" = 310 (Brass requires prefix '0')

Examples: 32PXSS2KREX1RA534 = Nickel Plated Brass 1 1/4" NPT, 50SPXSS2KREX1RA035 = Brass 1 1/2" NPT, 25PXSS2KREX1RA432 = Stainless Steel 3/4" NPT, 20PXSS2KREX1RA5 = Nickel Plated Brass M20

Dimensions are displayed in millimetres unless otherwise stated

Dimensions listed are for metric cable glands only. Dimensions for alternative threads may vary.

www.cmp-products.com

TDS598 REV10 04/21

PXSS2KREX

EXPLOSIVE ATMOSPHERE RAPIDEX BARRIER CABLE GLANDS