



↑ P
3号停车场
Park 3
公交车
Bus

Incandescent

The incandescent lamp has been used in households for more than 120 years and has long been proven to be reliable, easy to use and apart of a cozy and inviting environment.

Over the last decade, a major initiative to develop more efficient light sources has replaced much of the world's general service incandescent lamps. Nevertheless, many decorative or specialized applications still require the specific attributes of incandescent lighting.

Incandescent lamps provide the best possible colour rendering which, serves as the colour standard by which all other lamps are measured. Not only do they offer aesthetics and flexibility, they also do not require a ballast or transformer. As well, they are dimmable and function well even if exposed to heat or moisture.

Incandescent lamps are also appreciated for their low initial cost and for their absence of toxic materials like mercury, toxic alloys or semiconductors, especially when disposing of lamps at the end of their life.

General Service lamps & General Service Reflector lamps affected by legislation

In an effort to reduce overall energy consumption, regulations have been implemented on the use of traditional general service lamps. These regulations do not outright ban the use of any particular technology, but rather set minimum efficacy levels to be met.

Only products that do not meet the new criteria are not allowed to be sold. Products affected by the Canadian legislation have been identified throughout the catalogue.

Products designed for specialized applications, which cannot be replaced by other technologies are exempted from these regulations.




Victorian Style

Victorian style lamps are well suited for environments with warm colours and natural materials such as wood and brick, but also give character to any fixture, and existing setting, whether they be rustic, modern, industrial, zen, eclectic or traditional.

These retro-chic lamps enhance fixtures made of transparent glass or those styled with bare sockets, and highlight the filament and the shape of the lamp.

Because of their beauty and the warm glow they produce, Victorian style lamps are an ideal lighting choice for homes, restaurants, retail stores or offices.

- Amber colour
- 8 filament designs and 10 different shapes
- First-rate elegant lamps
- Long life of 3 000 hours

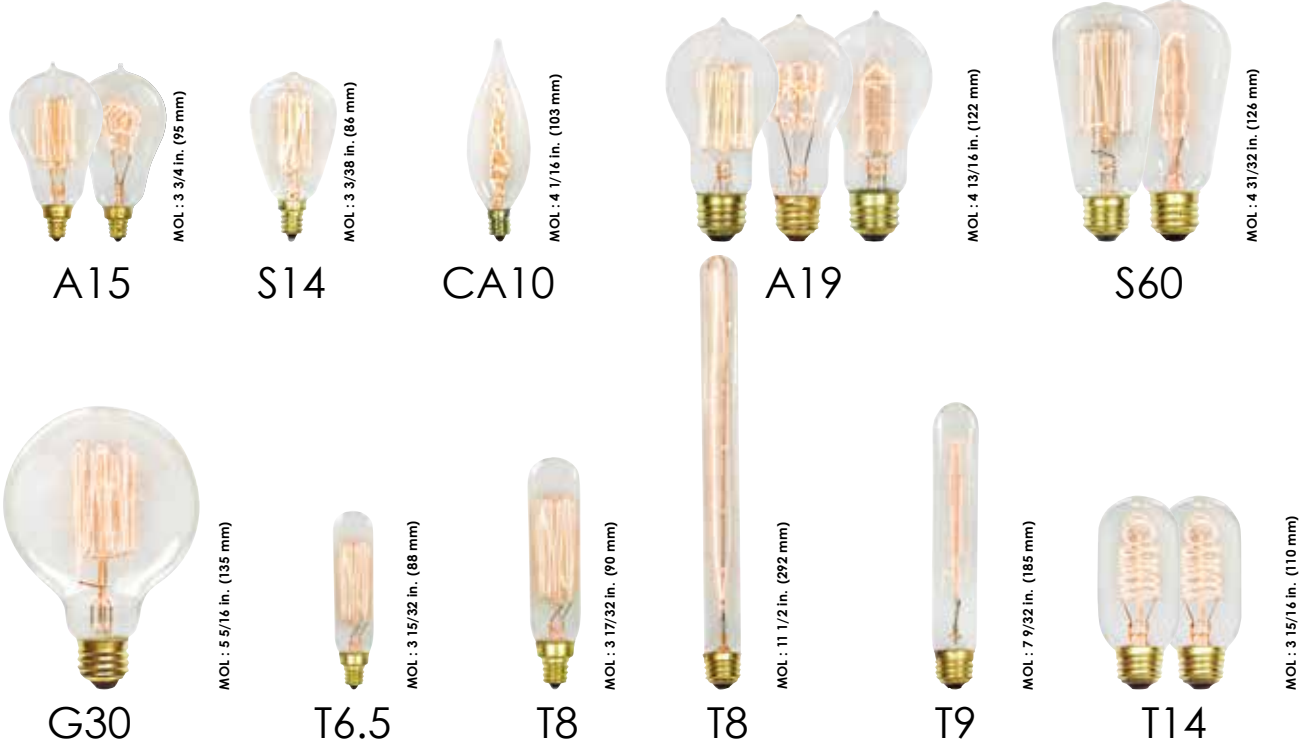

Showcase

Order code	Description	Watts (W)	Base	Volts (V)	Lumen output (lm)	Average life (hrs)	Filament type	Finish	Case qty (inner/master)
A15									
63672	25W VICTORIAN A15 SQU. CAGE E12/120V/STD	25	E12	120	35	3 000	C-17	Clear	6/120
63670	25W VICTORIAN A15 QUAD LOOP E12/120V/STD	25	E12	120	35	3 000	Quad Loop	Clear	6/120
S14									
62250	40W VICTORIAN S14 SQU. CAGE E12/120V/STD	40	E12	120	155	3 000	C-17	Clear	6/120
CA10									
63220	25W VICTORIAN CA10 SWIRL E12/120V/STD	25	E12	120	105	3 000	Swirl	Smoked	6/120
A19									
59839	40W VICTORIAN A19 SINGLE LOOP 120V/STD	40	E26	120	115	3 000	C-5VR	Clear	6/120
59840	40W VICTORIAN A19 SQUIRREL CAGE 120V/STD	40	E26	120	115	3 000	C-17	Clear	6/120
61087	40W VICTORIAN A19 QUAD LOOP 120V/STD	40	E26	120	140	3 000	Quad Loop	Clear	6/120
S60									
59837	40W VICTORIAN S60 SQUIRREL CAGE 120V/STD	40	E26	120	115	3 000	C-17	Clear	6/120
61088	60W VICTORIAN S60 SQUIRREL CAGE 120V/STD	60	E26	120	240	3 000	C-17	Clear	6/120
63669	40W VICTORIAN S60 SINGLE LOOP 120V/STD	40	E26	120	125	3 000	Single Loop	Clear	6/120
63671	60W VICTORIAN S60 SINGLE LOOP 120V/STD	60	E26	120	230	3 000	Single Loop	Clear	6/120
G30									
63219	60W VICTORIAN G30 SQUIRREL CAGE 120V/STD	60	E26	120	245	3 000	C-17	Smoked	6/120
T6.5									
63665	25W VICTORIAN T6.5 SQU. CAGE E12/120V/STD	25	E12	120	35	3 000	C-17	Clear	12/120
T8									
63664	40W VICTORIAN T8 SQU. CAGE E12/120V/STD	40	E12	120	135	3 000	C-17	Clear	12/120
T8 Showcase									
62411	40T8/CL/2M/SC/120V/STD	40	E26	120	330	2 000	C-8	Clear	25/100
T9									
63666	30W VICTORIAN T9 HAIRPIN 120V/STD	30	E26	120	40	3 000	Hairpin	Clear	12/120
T14									
63667	40W VICTORIAN T14 SQUIRREL CAGE 120V/STD	40	E26	120	135	3 000	C-17	Clear	6/120
63668	40W VICTORIAN T14 SPIRAL 120V/STD	40	E26	120	135	3 000	Spiral	Clear	6/120

Chandelier



MOL: 4 17/32 in. (115 mm)
LCL: 2 1/16 in. (52 mm)

HX10



MOL: 3 31/32 in. (101 mm)
LCL: 1 7/8 in. (48 mm)

C11



MOL: 4 1/2 in. (114 mm)
LCL: 2 3/8 in. (60 mm)

C15



MOL: 3 3/4 in. (95 mm)
LCL: 1 27/32 in. (47 mm)

B10



MOL: 3 3/4 in. (95 mm)
LCL: 1 27/32 in. (47 mm)

CA10



MOL: 2 7/8 in. (73 mm)
LCL: 1 13/32 in. (36 mm)

CA4.5

Order code	Description	Watts (W)	Base	Volts (V)	Lumen output (lm)	Average life (hrs)	Filament type	Finish	Case qty (inner/master)
Hexagonal									
HX10									
59815	25HX10/CL/5M/E12/130V/STD	25	E12	130	160	5 000	C-7A/3	Clear	6/120
59816	40HX10/CL/5M/E12/130V/STD	40	E12	130	300	5 000	C-7A/3	Clear	6/120
59817	60HX10/CL/5M/E12/130V/STD	60	E12	130	600	5 000	C-7A/3	Clear	6/120
Silk									
C11									
59807	25C11/SW/5M/SLK/E12/130V/STD	25	E12	130	160	5 000	C-2V	Satin white	6/120
59808	25C11/A/5M/SLK/E12/130V/STD	25	E12	130	N/A	5 000	C-2V	Amber	6/120
59809	40C11/SW/5M/SLK/E12/130V/STD	40	E12	130	310	5 000	C-2V	Satin white	6/120
59810	60C11/SW/5M/SLK/E12/130V/STD	60	E12	130	600	5 000	C-2V	Satin white	6/120
C15									
59811	25C15/SW/5M/SLK/130V/STD	25	E26	130	160	5 000	C-9	Satin white	6/120
59812	40C15/A/5M/SLK/130V/STD	40	E26	130	N/A	5 000	C-9	Amber	6/120
59813	40C15/SW/5M/SLK/130V/STD	40	E26	130	310	5 000	C-9	Satin white	6/120
59814 ¹	60C15/SW/5M/SLK/130V/STD	60	E26	130	600	5 000	C-9	Satin white	6/120
Flicker Flame									
B10									
50746	3B10/CL/2M/FF/E12/120V/STD	3	E12	120	N/A	2 000	Electrode	Clear	6/120
50747	3B10/CL/2M/FF/120V/STD	3	E26	120	N/A	2 000	Electrode	Clear	6/120
CA10									
50748	3CA10/CL/2M/FF/E12/120V/STD	3	E12	120	N/A	2 000	Electrode	Clear	6/120
50749	3CA10/CL/2M/FF/120V/STD	3	E26	120	N/A	2 000	Electrode	Clear	6/120
CA4.5									
14450	3CA4.5/CL/1.5M/FF/E12/130V	3	E12	130	N/A	1 500	Electrode	Clear	25/500

¹This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.

Half-mirror



Order code	Description	Watts (W)	Base	Volts (V)	Lumen output (lm)	Average life (hrs)	Filament type	Colour	Case qty (inner/master)
A19									
52170	40A19/SLV/3M/HM/130V/STD	40	E26	130	N/A	3000	C-9	Silver	6/120
52019	60A19/SLV/3M/HM/130V/STD	60	E26	130	N/A	3000	C-9	Silver	6/120
52020	100A19/SLV/3M/HM/130V/STD	100	E26	130	N/A	3000	C-9	Silver	24/120
A21									
52051	100A21/SLV/3M/HM/130V/STD	100	E26	130	N/A	3000	C-9	Silver	24/120
G16.5									
52159	25G16.5/SLV/3M/HM/E12/120V/STD	25	E12	120	N/A	3000	C-7A	Silver	25/500
52160	40G16.5/SLV/3M/HM/E12/120V/STD	40	E12	120	N/A	3000	C-7A	Silver	25/500
G25									
52058	25G25/SLV/3M/HM/130V/STD	25	E26	130	N/A	3000	C-9	Silver	6/60
52054	60G25/SLV/3M/HM/130V/STD	60	E26	130	N/A	3000	C-9	Silver	6/60
G30									
52163	40G30/SLV/3M/HM/130V/STD	40	E26	130	N/A	3000	C-9	Silver	10/500
51160	60G30/SLV/3M/HM/130V/STD	60	E26	130	N/A	3000	C-9	Silver	10/100
G40									
14502	60G40/SLV/2.5M/HM/130V	60	E26	130	N/A	2500	C-9	Silver	6/24
14503	100G40/SLV/2.5M/HM/130V	100	E26	130	N/A	2500	C-9	Silver	6/24

Neodymium



A19



A21

Order code	Description	Watts (W)	Base	Volts (V)	Lumen output (lm)	Average life (hrs)	Filament type	Finish	Case qty (inner/master)
A19									
50558 ¹	60A19/N/CL/2M/120V/STD	60	E26	120	750	2000	CC-6	Clear	6/24
50559 ¹	60A19/N/F/2M/120V/STD	60	E26	120	740	2000	CC-6	Frost	6/24
A21									
50560 ¹	100A21/N/CL/2M/120V/STD	100	E26	120	1 160	2 000	C-9	Frost	6/24
50561 ¹	100A21/N/F/2M/120V/STD	100	E26	120	1 200	2 000	C-9	Clear	6/24
50955	50/150A21/F/N/5M/120V/STD	50/100/150	E26d	120	520/1 200/1 720	5000	CC-8	Frost	6/24

Krypton & Daylight



B10



G11



A21

Order code	Description	Watts (W)	Base	Volts (V)	Lumens output ² (lm)	Average life ² (hrs)	Filament type	Finish	Case qty (inner/master)
Krypton									
B10									
14467	40B10/CL/3M/K/E12/120V	40	E12	120	450	3000	C-7A	Clear	10/120
14468	60B10/CL/3M/K/E12/120V	60	E12	120	760	3000	C-7A	Clear	10/120
G11									
14531	25G11/CL/3M/K/E12/120V	25	E12	120	300	3000	CC-2V	Clear	10/120
A21									
11152 ¹	135A21/CL/8M/TS/K/130V	135	E26	130	1 730	8000	C-9	Clear	6/24

¹ This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.

Infrared & Appliance



MOL: 6 9/16 in. (167 mm)
LCL: 4 1/4 in. (108 mm)

BR40



MOL: 6 9/16 in. (167 mm)
MOL: 7 1/4 in. (184 mm)
LCL: 3 29/32 in. (99 mm)

R40



MOL: 3 3/8 in. (86 mm)
LCL: 2 7/16 in. (62 mm)

A15

Order code	Description	Watts (W)	Base	Volts (V)	Lumen output (lm)	Average life (hrs)	Filament type	Finish	Case qty (inner/master)
Infrared BR40									
10249	125BR40/IR/CL/5M/120 130V/STD	125	E26	120	1 200	5 000	C-9	Clear	1/12
10251	250BR40/IR/CL/5M/120 130V/STD	250	E26	120	2 400	5 000	C-9	Clear	1/12
R40									
10250	125R40/IR/R/5M/ES/120 130V/STD	125	E26	120	N/A	5 000	C-9	Red	1/12
10252	250R40/IR/R/5M/120 130V/STD	250	E26	120	N/A	5 000	C-9	Red	1/12
62561	375R40/IR/CL/5M/120V/STD	375	E26	120	N/A	5 000	C11-3	Clear	1/12
A15 Appliance									
67721	40A15/CL/5M/APPL/130V/STD	40	E26	130	350	5 000	C-9	Clear	6/60
67722	40A15/FR/5M/APPL/130V/STD	40	E26	130	320	5 000	C-9	Frost	6/60

Flashing, BLB & Bug



MOL: 4 21/32 in. (118 mm)

G25



MOL: 4 1/4 in. (108 mm)
LCL: 3 1/32 in. (77 mm)

A19



MOL: 5 in. (127 mm)

T10



MOL: 4 1/4 in. (108 mm)
LCL: 3 1/32 in. (77 mm)

A19



MOL: 6 15/16 in. (176 mm)
LCL: 3 29/32 in. (99 mm)

G40

Order code	Description	Watts (W)	Base	Volts (V)	Lumen output (lm)	Average life (hrs)	Filament type	Finish/Colour	Case qty (inner/master)
Flashing									
G25									
52203	XFLASH/CL/120V	1	E26	120	1 040	10 000 000 flashes	C-11V	Clear	1/50
52204	XFLASH/B/120V	1	E26	120	N/A	10 000 000 flashes	C-11V	Blue	1/50
52205	XFLASH/G/120V	1	E26	120	N/A	10 000 000 flashes	C-9	Green	1/50
52206	XFLASH/R/120V	1	E26	120	N/A	10 000 000 flashes	C-9	Red	1/50
52207	XFLASH/Y/120V	1	E26	120	N/A	10 000 000 flashes	C-9	Yellow	1/50
Black light blue (BLB)									
A19									
52016	75A19/BLB/1.5M/120V/STD	75	E26	120	N/A	1 500	C-9	Black light blue	6/120
T10									
14662	40T10/BLB/1M/120V	40	E26	120	N/A	1 000	C-8	Black light blue	25/300
Bug light - 2 pack									
A19									
50153	60A19/CY/6M/BG/130V/STD/2P	60	E26	130	N/A	6 000	C-9	Ceramic yellow	12/120
G40									
52056	60G40/CY/3M/BG/130V/STD	60	E26	130	N/A	3 000	C-9	Ceramic yellow	1/24
52057	100G40/CY/3M/BG/130V/STD	100	E26	130	N/A	3 000	C-9	Ceramic yellow	1/24

Mining, Traffic & Plant



MOL: 6 9/16 in. (167 mm)
LCL: 4 1/4 in. (108 mm)

R40



MOL: 4 1/4 in. (108 mm)
LCL: 3 1/8 in. (79 mm)

A19



MOL: 5 5/16 in. (135 mm)
LCL: 2 7/16 in. (62 mm)

A21



MOL: 5 1/8 in. (130 mm)
LCL: 3 11/32 in. (85 mm)

BR30



MOL: 6 9/16 in. (167 mm)
LCL: 4 1/4 in. (108 mm)

BR40

Order code	Description	Watts (W)	Base	Volts (V)	Lumens at 120 V (lm)	Average life at 120 V (hrs)	Filament type	Finish	Case qty (inner/master)
Mining Service									
R40									
50482	300R40/FL/5M/MN/130V/STD	300	E26	130	2 271	5 000	CC-6	Clear	1/12
Traffic Light									
A19									
10863	60A19/CL/8M/TS/K/120 125V	125	E26	120	1 200	5 000	C-9	Clear	6/120
A21									
15554	40A21/CL/8M/TS/125 130V	40	E26	125	610	8 000	C-11V	Clear	1/120
A21 - 2 pack									
14620	67A21/CL/8M/TS/125 130V /2P	67	E26	125	610	8 000	C-9	Clear	1/60
10905	69A21/CL/8M/TS/125 130V /2P	69	E26	125	665	10 000	C-11V	Clear	1/120
Plant Light									
BR30									
50958	75R30/1.5M/PL/120V/STD	75	E26	120	N/A	1 500	C-9	Plant light	1/60
BR40									
14726	150BR40/2M/PL/120V/STD	150	E26	120	N/A	2 000	C-9	Plant light	1/12

Trilight



A21



MOL: 5 5/16 in. (135 mm)
LCL: 3 27/32 in. (98 mm)



PS25

MOL: 6 15/16 in. (176 mm)
LCL: 5 1/32 in. (128 mm)

Order code	Description	Watts (W)	Base	Volts (V)	Lumen output (lm)	Average life at 120 V (hrs)	Filament type	Finish	Case qty (inner/master)
A21									
10500	30/100A21/F/4M/130V/STD	30 / 70 / 100	E26d	130	280 / 800 / 1 080	4 000	CC-8	Frost	6/24
50152	30/100A21/WH/4M/130V/STD	30 / 70 / 100	E26d	130	230 / 760 / 990	4 000	CC-8	White	6/24
50117	50/150A21/WH/4M/130V/STD	50 / 100 / 150	E26d	130	520 / 1 200 / 1 720	4 000	CC-8	White	6/24
10486	50/150A21/F/4M/130V/STD	50 / 100 / 150	E26d	130	440 / 1 045 / 1 485	4 000	CC-8	Frost	6/24
51159	50/250A21/WH/2M/120V/STD	50 / 200 / 250	E26d	120	400 / 2 200 / 2 600	2 000	CC-8	White	6/24
50955	50/150A21/F/N/5M/120V/STD	50 / 100 / 150	E26d	120	520 / 1 200 / 1 720	5 000	CC-8	Frost	6/24
PS25									
51123	100/300/PS25/WH/E39/130V/STD	100 / 200 / 300	E39d	130	910 / 1 815 / 2 725	2 500	CC-6	White	6/24

Long life

101



A19

MOL.: 4 1/4 in. (108 mm)
LCL.: 3 1/32 in. (77 mm)



A21

MOL.: 5 5/16 in. (135 mm)
LCL.: 3 1/2 in. (89 mm)



BR30

MOL.: 5 1/8 in. (130 mm)
LCL.: 3 31/32 in. (101 mm)



G25

MOL.: 4 1/2 in. (114 mm)
LCL.: 2 7/8 in. (73 mm)



G40

MOL.: 6 15/16 in. (176 mm)
LCL.: 4 3/8 in. (111 mm)



R20

MOL.: 3 29/32 in. (99 mm)
LCL.: 2 15/16 in. (75 mm)



S14

MOL.: 3 1/2 in. (89 mm)
LCL.: 2 17/32 in. (64 mm)

Order code	Description	Watts (W)	Base	Volts (V)	Lumen output (lm)	Average life (hrs)	Filament type	Finish	Case qty (inner/master)
A19									
51121	25A19/CL/20M/120V/STD	25	E26	120	105	20000	C-9/4	Clear	6/120
10160	25A19/F/20M/120V/STD	25	E26	120	105	20000	C-9/4	Frost	6/120
10161	40A19/CL/20M/120V/STD	40	E26	120	200	20000	C-9/4	Clear	6/24
10166 ¹	100A19/F/20M/120V/STD	100	E26	120	800	20000	C-9/5	Frost	6/24
A21									
10327 ¹	100A21/F/20M/120V/STD	100	E26	120	800	20000	C-9/5	Frost	6/24
BR30									
59235	65BR30/FL/20M/120V/STD	65	E26	120	340	20000	C-9/5	Clear	6/60
G25									
14600	40G25/WH/20M/120V	40	E26	120	320	20000	C-11	White	1/60
G40									
14606	25G40/CL/20M/120V	25	E26	120	190	20000	C-11	Clear	1/24
R20									
10256 ¹	50R20/SP/20M/120V/STD	50	E26	120	400	20000	C-9/5	Clear	6/200
S14									
10259	10S14/CL/20M/120V/STD	10	E26	120	50	20000	C-9/5	Clear	6/24
14613	15S14/CL/20M/120V	15	E26	120	88	20000	C-11	Clear	1/120

¹ This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.

Low Voltage



MOL: 4 1/4 in. (108 mm)
LCL: 3 1/8 in. (79 mm)

A19



MOL: 5 5/16 in. (135 mm)
LCL: 3 17/32 in. (90 mm)

A21



MOL: 2 5/16 in. (59 mm)
LCL: 1 1/2 in. (38 mm)

S11



MOL: 3 5/16 in. (84 mm)
LCL: 2 17/32 in. (64 mm)

S14



MOL: 6 3/16 in. (157 mm)
LCL: 5 1/32 in. (128 mm)

A23

Order code	Description	Watts (W)	Base	Volts (V)	Lumen output (lm)	Average life (hrs)	Filament type	Finish/ Colour	Filament type	Case qty (inner/master)
A19										
52223	15A19/F/1.5M/12V/STD	15	E26	12	105	1 500	C-6	Frost	C-6	6/120
52022	25A19/F/1.5M/12V/STD	25	E26	12	220	1 500	C-6	Frost	C-6	6/120
52024	25A19/F/1.5M/24V/STD	25	E26	24	220	1 500	C-6	Frost	C-6	6/120
52222	25A19/F/1.5M/32V/STD	25	E26	32	220	1 500	C-6	Frost	C-6	6/120
52010	50A19/F/1.5M/12V/STD	50	E26	12	410	1 500	C-6	Frost	C-6	6/120
52011	50A19/F/1.5M/24V/STD	50	E26	24	410	1 500	C-6	Frost	C-6	6/120
52012	50A19/F/1.5M/32V/STD	50	E26	32	410	1 500	C-6	Frost	C-6	6/120
52224	50A19/F/1.5M/60V/STD	50	E26	60	410	1 500	C-6	Frost	C-6	6/120
59846	50A19/F/RS/1M/75V/STD	50	E26	75	500	1 000	C-9	Frost	C-9	6/120
52023	100A19/F/1.5M/12V/STD	100	E26	12	1 385	1 500	C-6	Frost	C-6	6/120
52025	100A19/F/1.5M/24V/STD	100	E26	24	1 385	1 500	C-6	Frost	C-6	6/120
52026	100A19/F/1.5M/32V/STD	100	E26	32	1 385	1 500	C-6	Frost	C-6	6/120
52225	100A19/F/1.5M/34V/STD	100	E26	34	1 385	1 500	C-6	Frost	C-6	6/120
A21										
50075	50A21/F/2M/47V/STD	50	E26	47	650	2 000	C-6	Frost	C-6	24/120
S11										
50790	15S11/CL/1M/BA15d/75V/STD	15	BA15d	75	140	1 000	C-7A	Clear	C-7A	25/500
50791	30S11/CL/BA15d/75V/STD	30	BA15d	75	280	1 000	C-7A	Clear	C-7A	25/500
S14										
52210	11S14/CL/1.5M/6V/STD	11	E26	6	78	1 500	C-6	Clear	C-6	25/500
52208	11S14/CL/1.5M/12V/STD	11	E26	12	76	1 500	C-6	Clear	C-6	25/500
52209	11S14/CL/1.5M/24V/STD	11	E26	24	74	1 500	C-6	Clear	C-6	25/500

Rough Service



Order code	Description	Watts (W)	Base	Volts (V)	Lumen output (lm)	Average life (hrs)	Filament type	Finish	Case qty (inner/master)
A19 - 2 pack									
61799	50A19/F/RS/130V/STD/2P	50	E26	130	360	5 000	C-7A	Frost	1/120
61800	60A19/F/RS/130V/STD/2P	60	E26	130	520	5 000	C-7A	Frost	1/120
61801	75A19/F/RS/130V/STD/2P	75	E26	130	680	5 000	C-7A	Frost	1/120
61802	100A19/F/RS/130V/STD/2P	100	E26	130	1 050	5 000	C-7A	Frost	1/120
A21									
52134	100A21/F/RS/130V/STD	100	E26	130	1 050	5 000	C-7A	Frost	6/60
50073	150A21/F/RS/130V/STD	150	E26	130	1 750	5 000	C-7A	Frost	6/60
A23									
50087	150A23/F/RS/130V/STD	150	E26	130	1 750	5 000	C-7A	Frost	6/60
50074	200A23/F/RS/130V/STD	200	E26	130	2 500	5 000	C-7A	Frost	6/60

High Voltage



Order code	Description	Watts (W)	Base	Volts (V)	Lumen output (lm)	Average life (hrs)	Filament type	Finish	Case qty (inner/master)
A15									
14797	40A15/IF/250V	40	E26	250	300	5 000	C-9	Frost	1/50
A19									
59541	40A19/F/1M/E27/230 240V/STD	40	E27	240	410	1 000	CC-9	Frost	10/100
52021	50A19/F/2M/E27/230 250V/STD	50	E27	230	485	2 000	CC-9	Frost	6/120
14656	100A19F/2M/B22/230 250V	100	B22	230	1 380	2 000	CC-9	Frost	10/100
B10									
52158	25B10/CL/3M/E12/220V/STD	25	E12	220	185	3 000	C-7A	Clear	25/500
T7									
52193	15T7/CL/1.5M/E12/250V/STD	15	E12	250	95	1 500	C-7A	Clear	25/1000
PS35									
14660	500PS35/CL/2M/E39/240V	500	E39	240	8 500	2 000	CC-9	Clear	1/12

Holiday

Order code	Description	Watts (W)	Base	Volts (V)	Average life (hrs)	Filament type	Finish	Case qty (inner/master)
C7.5								
MOL : 2 5/32 in. (55 mm) LCL : 1 1/2 in. (38 mm)								
52415	5C7.5/CW/1M/E12/120V/STD	5	E12	120	1 000	C-7A	Ceramic white	25/500
22002	5C7.5/CL/1M/E12/120V/STD	5	E12	120	1 000	C-7A	Clear	25/500
52177	5C7.5/TG/1M/E12/120V/STD	5	E12	120	1 000	C-7A	Transparent green	25/500
52179	5C7.5/TR/1M/E12/120V/STD	5	E12	120	1 000	C-7A	Transparent red	25/500
C9.25								
MOL : 2 7/8 in. (73 mm) LCL : 2 15/32 in. (63 mm)								
52184	7C9.25/CW/1M/E17/120V/STD	7	E17	120	1 000	C-7A	Ceramic white	25/500
22003	7C9.25/CL/1M/E17/120V/STD	7	E17	120	1 000	C-7A	Clear	25/500
52187	7C9.25/TG/1M/E17/120V/STD	7	E17	120	1 000	C-7A	Transparent green	25/500
52188	7C9.25/TP/1M/E17/120V/STD	7	E17	120	1 000	C-7A	Transparent pink	25/500
52189	7C9.25/TR/1M/E17/120V/STD	7	E17	120	1 000	C-7A	Transparent red	25/500

Coloured

Order code	Description	Watts (W)	Base	Volts (V)	Average life (hrs)	Filament type	Finish/ Colour	Case qty (inner/master)
A19 Ceramic								
MOL : 4 1/4 in. (108 mm) LCL : 2 27/32 in. (72 mm)								
52070	25A19/CB/5M/130V/STD	25	E26	130	5 000	C-9	Ceramic blue	6/24
52072	25A19/CP/5M/130V/STD	25	E26	130	5 000	C-9	Ceramic pink	6/24
52034	25A19/CR/5M/130V/STD	25	E26	130	5 000	C-9	Ceramic red	6/24
52035	25A19/CY/5M/130V/STD	25	E26	130	5 000	C-9	Ceramic yellow	6/24
52078	40A19/CB/5M/130V/STD	40	E26	130	5 000	C-9	Ceramic blue	6/24
52432	40A19/CO/5M/130V/STD	40	E26	130	5 000	C-9	Ceramic orange	6/24
52080	40A19/CP/5M/130V/STD	40	E26	130	5 000	C-9	Ceramic pink	6/24
52036	40A19/CR/5M/130V/STD	40	E26	130	5 000	C-9	Ceramic red	6/24
52037	40A19/CY/5M/130V/STD	40	E26	130	5 000	C-9	Ceramic yellow	6/24
52089	60A19/CO/5M/130V/STD	60	E26	130	5 000	C-9	Ceramic orange	6/24
52090	60A19/CP/5M/130V/STD	60	E26	130	5 000	C-9	Ceramic pink	6/24
52038	60A19/CR/5M/130V/STD	60	E26	130	5 000	C-9	Ceramic red	6/24
52091	60A19/CSP/5M/130V/STD	60	E26	130	5 000	C-9	Ceramic snow pink	6/24
52094	100A19/CB/5M/130V/STD	100	E26	130	5 000	C-9	Ceramic blue	6/24
52096	100A19/CR/5M/130V/STD	100	E26	130	5 000	C-9	Ceramic red	6/24
52097	100A19/CY/5M/130V/STD	100	E26	130	5 000	C-9	Ceramic yellow	6/24

Order code	Description	Watts (W)	Base	Volts (V)	Average life (hrs)	Filament type	Finish/ Colour	Case qty (inner/master)
A19 Transparent								
MOL : 4 1/4 in. (108 mm) LCL : 2 27/32 in. (72 mm)								
52073	25A19/TA/5M/130V/STD	25	E26	130	5 000	C-9	Transparent amber	6/24
52074	25A19/TB/5M/130V/STD	25	E26	130	5 000	C-9	Transparent blue	6/24
52075	25A19/TG/5M/130V/STD	25	E26	130	5 000	C-9	Transparent green	6/24
52076	25A19/TR/5M/130V/STD	25	E26	130	5 000	C-9	Transparent red	6/24
52077	25A19/TY/5M/130V/STD	25	E26	130	5 000	C-9	Transparent yellow	6/24
52082	40A19/TA/5M/130V/STD	40	E26	130	5 000	C-9	Transparent amber	6/24
52083	40A19/TB/5M/130V/STD	40	E26	130	5 000	C-9	Transparent blue	6/24
52085	40A19/TR/5M/130V/STD	40	E26	130	5 000	C-9	Transparent red	6/24
52086	40A19/TY/5M/130V/STD	40	E26	130	5 000	C-9	Transparent yellow	6/24
52039	60A19/TA/5M/130V/STD	60	E26	130	5 000	C-9	Transparent amber	6/24
52040	60A19/TB/5M/130V/STD	60	E26	130	5 000	C-9	Transparent blue	6/24
52092	60A19/TG/5M/130V/STD	60	E26	130	5 000	C-9	Transparent green	6/24
52041	60A19/TR/5M/130V/STD	60	E26	130	5 000	C-9	Transparent red	6/24
52098	100A19/TA/5M/130V/STD	100	E26	130	5 000	C-9	Transparent amber	6/24
BR30								
MOL : 5 13/32 in. (137 mm) LCL : 3 3/8 in. (86 mm)								
52027	75BR30/A/FL/5M/130V/STD	75	E26	130	5 000	C-9	Amber	6/24
52030	75BR30/P/FL/5M/130V/STD	75	E26	130	5 000	C-9	Pink	6/24
BR30 Transparent								
MOL : 5 13/32 in. (137 mm) LCL : 3 3/8 in. (86 mm)								
10083	75BR30/TA/5M/130V/STD	75	E26	130	5 000	C-9	Transparent amber	1/24
10104	75BR30/TG/5M/130V/STD	75	E26	130	5 000	C-9	Transparent green	1/24
10139	75BR30/TP/5M/130V/STD	75	E26	130	5 000	C-9	Transparent pink	1/24
10082	75BR30/TR/5M/130V/STD	75	E26	130	5 000	C-9	Transparent red	1/24
10081	75BR30/TB/5M/130V/STD	75	E26	130	5 000	C-9	Transparent blue	1/24
BR38								
MOL : 5 25/32 in. (147 mm) LCL : 3 9/32 in. (83 mm)								
50093	100BR38/A/5M/130V/STD	100	E26	130	5 000	C-9	Amber	1/12
50095	100BR38/G/5M/130V/STD	100	E26	130	5 000	C-9	Green	1/12
50098	100BR38/Y/5M/130V/STD	100	E26	130	5 000	C-9	Yellow	1/12
BR40								
MOL : 6 1/2 in. (165 mm) LCL : 3 3/8 in. (86 mm)								
52068	150BR40/R/FL/5M/130V/STD	150	E26	130	5 000	C-9	Red	1/12
F10								
MOL : 3 1/16 in. (78 mm) LCL : 1 21/32 in. (43 mm)								
14456	15F10/A/2.5M/E12/130V	15	E12	130	2 500	C-7A	Amber	25/250
14460	25F10/A/2.5M/E12/130V	25	E12	130	2 500	CC-2V	Amber	25/250
F15								
MOL : 4 1/4 in. (108 mm) LCL : 2 9/16 in. (65 mm)								
50756	25F15/A/1.5M/130V/STD	25	E26	130	1 500	CC-2V	Amber	25/100
50753	25F15/WH/1.5M/130V/STD	25	E26	130	1 500	CC-2V	White	25/100
50757	40F15/A/1.5M/130V/STD	40	E26	130	1 500	CC-2V	Amber	25/100
50754	40F15/WH/1.5M/130V/STD	40	E26	130	1 500	CC-2V	White	25/100
50758	60F15/A/1.5M/130V/STD	60	E26	130	1 500	CC-2V	Amber	25/100

Order code	Description	Watts (W)	Base	Volts (V)	Average life (hrs)	Filament type	Finish/ Colour	Case qty (inner/master)
G11								
MOL : 2 5/16 in. (59 mm) LCL : 1 5/8 in. (41 mm)								
50764	7.5G11/CG/1M/130V/STD	7.5	E26	130	1 000	C-5	Ceramic green	25/500
50765	7.5G11/CO/1M/130V/STD	7.5	E26	130	1 000	C-5	Ceramic orange	25/500
50766	7.5G11/CR/1M/130V/STD	7.5	E26	130	1 000	C-5	Ceramic red	25/500
50760	7.5G11/WH/1M/E12/130V/STD	7.5	E12	130	1 000	C-5	White	25/500
50762	7.5G11/WH/1M/130V/STD	7.5	E26	130	1 000	C-5	White	25/500
50767	7.5G11/CY/1M/130V/STD	7.5	E26	130	1 000	C-5	Ceramic Yellow	25/500
G13								
MOL : 2 13/32 in. (61 mm) LCL : 1 21/32 in. (42 mm)								
14717	10G13/WH/3M/E12/130V	10	E12	130	3 000	C-7A	White	25/500
R20								
MOL : 3 31/32 in. (101 mm) LCL : 2 3/4 in. (70 mm)								
52060	50R20/A/5M/130V/STD	50	E26	130	5 000	C-9	Amber	6/24
52066	50R20/Y/5M/130V/STD	50	E26	130	5 000	C-9	Yellow	6/24
R20 Transparent								
MOL : 3 31/32 in. (101 mm) LCL : 2 3/4 in. (70 mm)								
10085	50R20/TB/5M/130V/STD	50	E26	130	5 000	C-9	Transparent blue	6/24
52062	50R20/G/5M/130V/STD	50	E26	130	5 000	C-9	Green	6/24
52065	50R20/TP/5M/130V/STD	50	E26	130	5 000	C-9	Transparent pink	6/24
10137	50R20/TR/5M/130V/STD1M	50	E26	130	5 000	C-9	Transparent red	6/24
10138	50R20/TY/5M/130V/STD	50	E26	130	5 000	C-9	Transparent yellow	6/24
S11 Transparent								
MOL : 2 5/16 in. (59 mm) LCL : 1 5/8 in. (41 mm)								
50799	10S11/TG/1M/E17/130V/STD	10	E17	130	1 000	C-7A	Transparent green	25/500
50801	10S11/TR/1M/E17/130V/STD	10	E17	130	1 000	C-7A	Transparent red	25/500
S14 Ceramic								
MOL : 3 5/16 in. (84 mm) LCL : 2 17/32 in. (64 mm)								
52211	11S14/CB/3M/130V/STD	11	E26	130	3 000	C-9	Ceramic blue	25/500
52212	11S14/CG/3M/130V/STD	11	E26	130	3 000	C-9	Ceramic green	25/500
52213	11S14/CO/3M/130V/STD	11	E26	130	3 000	C-9	Ceramic orange	25/500
52214	11S14/CR/3M/130V/STD	11	E26	130	3 000	C-9	Ceramic red	25/500
22004	11S14/CY/3M/130V/STD	11	E26	130	3 000	C-9	Ceramic yellow	25/500
S14 Transparent								
MOL : 3 5/16 in. (84 mm) LCL : 2 17/32 in. (64 mm)								
52216	11S14/TA/3M/130V/STD	11	E26	130	3 000	C-9	Transparent amber	25/500
52217	11S14/TB/3M/130V/STD	11	E26	130	3 000	C-9	Transparent blue	25/500
52218	11S14/TG/3M/130V/STD	11	E26	130	3 000	C-9	Transparent green	25/500
52219	11S14/TR/3M/130V/STD	11	E26	130	3 000	C-9	Transparent red	25/500
52220	11S14/TY/3M/130V/STD	11	E26	130	3 000	C-9	Transparent yellow	25/500

Britelux™

10



MOL.: 3 29/32 in. (99 mm)
LCL.: 2 1/8 in. (54 mm)

B10



MOL.: 5 1/8 in. (130 mm)
LCL.: 3 11/32 in. (85 mm)

B30



MOL.: 3 in. (76 mm)
LCL.: 1 7/8 in. (48 mm)

G16.5



MOL.: 4 1/2 in. (114 mm)
LCL.: 3 1/32 in. (77 mm)

G25



MOL.: 5 13/32 in. (137 mm)
LCL.: 3 9/32 in. (83 mm)

G30



MOL.: 6 15/16 in. (176 mm)
LCL.: 3 29/32 in. (99 mm)

G40



MOL.: 3 29/32 in. (99 mm)
LCL.: 2 15/16 in. (75 mm)

R20



MOL.: 2 5/16 in. (59 mm)
LCL.: 1 5/8 in. (41 mm)

S11

Order code	Description	Watts (W)	Base	Volts (V)	Lumen output (lm)	Average life (hrs)	Filament type	Finish	Case qty (inner/master)
B10									
50522	25B10/CL/2M/E12/120V/STD BLX	25	E12	120	220	2000	CC-2V	Clear	6/120
50525	25B10/CL/2M/120V/STD BLX	25	E26	120	220	2000	CC-2V	Clear	6/120
50523	40B10/CL/2M/E12/120V/STD BLX	40	E12	120	370	2000	CC-2V	Clear	6/120
50526	40B10/CL/2M/120V/STD BLX	40	E26	120	370	2000	CC-2V	Clear	6/120
50524	60B10/CL/2M/E12/120V/STD BLX	60	E12	120	550	2000	C-7A/3	Clear	6/120
BR30									
52002	65BR30/FL/2M/ES/120V/STD BLX	65	E26	120	620	2000	CC-6	Clear	6/60
G16.5									
10270	25G16.5/WH/2M/E12/120V/STD BLX	25	E12	120	180	2000	CC-2V	White	25/500
50686	40G16.5/CL/2M/E12/120V/STD BLX	40	E12	120	370	2000	CC-2V	Clear	6/120
50688	60G16.5/CL/2M/E12/120V/STD BLX	60	E12	120	650	2000	CC-2V	Clear	6/120
50689	60G16.5/WH/2M/E12/120V/STD BLX	60	E12	120	580	2000	CC-2V	White	6/120
G25									
50167	25G25/CL/2M/120V/STD BLX	25	E26	120	220	2000	CC-6	Clear	25/150
50170	40G25/WH/2M/120V/STD BLX	40	E26	120	400	2000	CC-6	White	6/60
G30									
50180	40G30/CL/2M/120V/STD BLX	40	E26	120	440	2000	CC-6	Clear	6/60
50181	40G30/WH/2M/120V/STD BLX	40	E26	120	400	2000	CC-6	White	6/60
G40									
50175	60G40/CL/2M/120V/STD BLX	60	E26	120	520	2000	CC-6	Clear	12/24
50177	100G40/CL/2M/120V/STD BLX	100	E26	120	1350	2000	CC-6	Clear	12/24
50178	100G40/WH/2M/120V/STD BLX	100	E26	120	1200	2000	CC-6	White	6/12
R20									
51080	30R20/FL/2M/120V/STD BLX	30	E26	120	170	2000	CC-6	Frost	6/60
61706	45R20/FL/2M/120V/STD BLX	45	E26	120	380	2000	CC-6	Frost	6/60
51081 ¹	75R20/FL/2M/120V/STD BLX	75	E26	120	650	2000	C-9/5	Clear	10/200
S11									
52167	40S11/CL/1M/E17/120V/STD BLX	40	E17	120	400	1000	C-7A	Clear	25/500

¹This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.

General Service

Order code	Description	Watts (W)	Base	Volts (V)	Lumens at 120 V (lm)	Average life (hrs)	Filament type	Finish/Colour	Case qty (inner/master)
A15									
MOL : 3 1/2 in. (89 mm) LCL : 2 3/8 in. (60 mm)									
50125	15A15/CL/5M/130V/STD	15	E26	130	85	5 000	C-9	Clear	6/60
50166	15A15/F/5M/130V/STD	15	E26	130	80	5 000	C-9	Frost	6/60
50145	25A15/CL/5M/130V/STD	25	E26	130	135	5 000	C-9	Clear	6/60
50126	25A15/F/5M/130V/STD	25	E26	130	135	5 000	C-9	Frost	6/60
A19									
MOL : 4 1/4 in. (108 mm) LCL : 3 1/8 in. (79 mm)									
50941	15A19/CL/6M/130V/STD	15	E26	130	80	6 000	C-9	Clear	6/120
50128	15A19/F/6M/130V/STD	15	E26	130	80	6 000	C-9	Frost	6/120
50931	25A19/CL/1M/120V/STD/4P	25	E26	120	150	1 000	C-9	Clear	6/120
50932	25A19/F/1M/120V/STD/4P	25	E26	120	140	1 000	C-9	Frost	6/120
50942	25A19/CL/6M/130V/STD/4P	25	E26	130	105	6 000	C-9	Clear	6/120
50943	25A19/F/6M/130V/STD/4P	25	E26	130	100	6 000	C-9	Frost	6/120
B8									
MOL : 3 5/32 in. (80 mm) LCL : 1 7/8 in. (48 mm)									
50638	15B8/F/2.5M/E12/130V/STD	15	E12	130	70	2 500	C-7A	Frost	6/120
50639	25B8/F/2.5M/E12/130V/STD	25	E12	130	115	2 500	C-7A	Frost	6/120
B10									
MOL : 3 29/32 in. (99 mm) LCL : 1 25/32 in. (45 mm)									
50611	15B10/CL/3M/E12/130V/STD	15	E12	130	75	3 000	C-7A	Clear	6/120
50543	25B10/CL/3M/E12/130V/STD	25	E12	130	165	3 000	CC-2V	Clear	6/120
50612	25B10/F/3M/E12/130V/STD	25	E12	130	165	3 000	CC-2V	Frost	6/120
MOL : 3 1/2 in. (89 mm) LCL : 2 1/8 in. (54 mm)									
50621	25B10/CL/3M/130V/STD	25	E26	130	165	3 000	CC-2V	Clear	6/120
MOL : 3 31/32 in. (101 mm) LCL : 1 25/32 in. (45 mm)									
50548	25B10/CL/3M/E14/130V/STD	25	E14	130	165	3 000	CC-2V	Clear	6/120
50551	25B10/F/3M/E14/130V/STD	25	E14	130	195	3 000	CC-2V	Frost	6/120
B10 Suitable for base up									
MOL : 3 1/2 in. (89 mm) LCL : 2 1/8 in. (54 mm)									
50624	25B10/F/3M/130V/STD	25	E26	130	165	3 000	CC-2V	Frost	6/120
50622	40B10/CL/3M/130V/STD	40	E26	130	280	3 000	CC-2V	Clear	6/120
50625	40B10/F/3M/130V/STD	40	E26	130	280	3 000	CC-2V	Frost	6/120
MOL : 3 29/32 in. (99 mm) LCL : 1 25/32 in. (45 mm)									
50544	40B10/CL/3M/E12/130V/STD	40	E12	130	280	3 000	CC-2V	Clear	6/120
50613	40B10/F/3M/E12/130V/STD	40	E12	130	280	3 000	CC-2V	Frost	6/120
50545	60B10/CL/3M/E12/130V/STD	60	E12	130	430	3 000	C-7A/3	Clear	6/120
50614	60B10/F/3M/E12/130V/STD	60	E12	130	430	3 000	C-7A/3	Frost	6/120
MOL : 3 31/32 in. (101 mm) LCL : 1 25/32 in. (45 mm)									
50549	40B10/CL/3M/E14/130V/STD	40	E14	130	280	3 000	CC-2V	Clear	6/120
50552	40B10/F/3M/E14/130V/STD	40	E14	130	280	3 000	CC-2V	Frost	6/120
50550	60B10/CL/3M/E14/130V/STD	60	E14	130	430	3 000	C-7A/3	Clear	6/120
50553	60B10/F/3M/E14/130V/STD	60	E14	130	430	3 000	C-7A/3	Frost	6/120
BR30									
MOL : 5 1/8 in. (130 mm) LCL : 3 11/32 in. (85 mm)									
50219	50BR30/FL/5M/130V/STD	50	E26	130	240	5 000	C-9	Clear	6/60
50077	65BR30/FL/5M/ES/130V/STD	65	E26	130	470	5 000	CC-6	Clear	6/60
50079	65BR30/SP/5M/ES/130V/STD	65	E26	130	470	5 000	CC-6	Clear	6/60
BR40									
MOL : 6 9/16 in. (167 mm) LCL : 4 1/4 in. (108 mm)									
50080 ¹	65BR40/FL/5M/ES/130V/STD	65	E26	130	470	5 000	CC-6	Clear	1/12
C7									
MOL : 2 1/8 in. (54 mm) LCL : 1 1/2 in. (38 mm)									
50967	4C7/CL/3M/E12/125V/STD	4	E12	125	25	3 000	C-7A	Clear	1/500
22008	7C7/CL/2M/E12/120V/2P/STD	7	E12	120	26	2 000	C-7A	Clear	30/120

¹ This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.

Order code	Description	Watts (W)	Base	Volts (V)	Lumens at 120 V (lm)	Average life (hrs)	Filament type	Finish	Case qty (inner/master)
CA4.5									
MOL : 2 3/4 in. (70 mm) LCL : 1 5/8 in. (41 mm)									
50634	7.5CA4.5/CL/2M/E12/120V/STD	7.5	E12	120	30	2 000	C-7A	Clear	6/120
52153	10CA4.5/CL/2M/E12/130V/STD	10	E12	130	40	2 000	C-7A	Clear	6/120
CA8									
MOL : 3 19/32 in. (91 mm) LCL : 1 25/32 in. (45 mm)									
52157	10CA8/F/2.5M/E12/130V/STD	10	E12	130	50	2 500	C-7A	Frost	25/500
50641	15CA8/CL/2.5M/E12/130V/STD	15	E12	130	70	2 500	C-7A	Clear	6/120
10269	15CA8/F/2.5M/E12/130V/STD	15	E12	130	70	2 500	C-7A	Frost	25/500
52156	25CA8/CL/2.5M/E12/130V/STD	25	E12	130	120	2 500	C-7A	Clear	25/500
50643	25CA8/F/2.5M/E12/130V/STD	25	E12	130	115	2 500	C-7A	Frost	6/120
50642	40CA8/CL/2.5M/E12/130V/STD	40	E12	130	215	2 500	C-7A	Clear	25/500
50644	40CA8/F/2.5M/E12/130V/STD	40	E12	130	215	2 500	C-7A	Frost	25/500
CA10									
MOL : 3 29/32 in. (99 mm) LCL : 2 1/8 in. (54 mm)									
51051	25CA10/CL/3M/130V/STD	25	E26	130	120	3 000	C-7A	Clear	6/120
50629	25CA10/F/3M/130V/STD	25	E26	130	115	3 000	C-7A	Frost	6/120
50627	40CA10/CL/3M/130V/STD	40	E26	130	215	3 000	C-7A	Clear	6/120
50630	40CA10/F/3M/130V/STD	40	E26	130	205	3 000	C-7A	Frost	6/120
MOL : 4 3/32 in. (104 mm) LCL : 1 7/8 in. (48 mm)									
50615	25CA10/CL/3M/E12/130V/STD	25	E12	130	135	3 000	CC-2V	Clear	6/120
50618	25CA10/F/3M/E12/130V/STD	25	E12	130	115	3 000	CC-2V	Frost	6/120
50616	40CA10/CL/3M/E12/130V/STD	40	E12	130	235	3 000	CC-2V	Clear	6/120
50619	40CA10/F/3M/E12/130V/STD	40	E12	130	205	3 000	CC-2V	Frost	6/120
50617	60CA10/CL/3M/E12/130V/STD	60	E12	130	455	3 000	CC-2V	Clear	6/120
50620	60CA10/F/3M/E12/130V/STD	60	E12	130	450	3 000	CC-2V	Frost	6/120
F15									
MOL : 4 1/2 in. (115 mm) LCL : 2 9/16 in. (65 mm)									
50751	25F15/CL/2M/130V/STD	25	E26	130	160	2 000	CC-6	Clear	25/100
50750	40F15/CL/2M/130V/STD	40	E26	130	305	2 000	CC-6	Clear	25/100
G9.5									
MOL : 2 1/16 in. (52 mm) LCL : 1 1/2 in. (38 mm)									
52165	7.5G9.5/CL/1M/E12/130V/STD	7	E12	130	40	1 000	C-7A	Clear	25/500
G11									
MOL : 2 5/16 in. (59 mm) LCL : 1 5/8 in. (41 mm)									
50759	7.5G11/CL/1M/E12/130V/STD	7.5	E12	130	510	1 000	C-5	Clear	25/500
50761	7.5G11/CL/1M/130V/STD	7.5	E26	130	40	1 000	C-5	Clear	25/500
G13									
MOL : 2 3/8 in. (60.5 mm) LCL : 1 11/16 in. (43 mm)									
50681	10G13/CL/3M/E12/130V/STD	10	E12	130	50	3 000	C-7A	Clear	25/500
50682	25G13/CL/3M/E12/130V/STD	25	E12	130	135	3 000	CC-2V	Clear	6/120
50683	40G13/CL/3M/E12/130V/STD	40	E12	130	250	3 000	CC-2V	Clear	25/500
50684	60G13/CL/3M/E12/130V/STD	60	E12	130	490	3 000	C-7A	Clear	25/500
G16.5									
MOL : 3 in. (76 mm) LCL : 1 7/8 in. (48 mm)									
10334	5G16.5/CL/3M/E12/130V/STD	5	E12	130	20	3 000	C-7A	Clear	6/120
10268	10G16.5/CL/3M/E12/130V/STD	10	E12	130	50	3 000	C-7A	Clear	6/120
50660	15G16.5/CL/3M/E12/130V/STD	15	E12	130	70	3 000	C-7A	Clear	6/120
50662	15G16.5/WH/3M/E12/130V/STD	15	E12	130	60	3 000	C-7A	White	6/120
50661	15G16.5/CL/3M/130V/STD	15	E26	130	70	3 000	C-7A	Clear	6/120
50648	25G16.5/CL/3M/E12/130V/STD	25	E12	130	135	3 000	CC-2V	Clear	6/120
50652	25G16.5/WH/3M/E12/130V/STD	25	E12	130	120	3 000	CC-2V	White	6/120
50777	25G16.5/CL/3M/E14/130V/STD	25	E14	130	160	3 000	CC-6	Clear	6/120
50649	25G16.5/CL/3M/130V/STD	25	E26	130	135	3 000	CC-2V	Clear	6/120
50653	25G16.5/WH/3M/130V/STD	25	E26	130	120	3 000	CC-2V	White	6/120
50654	40G16.5/WH/3M/E12/130V/STD	40	E12	130	230	3 000	CC-2V	White	6/120
50651	40G16.5/CL/3M/130V/STD	40	E26	130	250	3 000	CC-2V	Clear	6/120
50655	40G16.5/WH/3M/130V/STD	40	E26	130	230	3 000	CC-2V	White	6/120
50656	60G16.5/CL/3M/E12/130V/STD	60	E12	130	440	3 000	CC-2V	Clear	6/120
50658	60G16.5/WH/3M/E12/130V/STD	60	E12	130	400	3 000	CC-2V	White	6/120

Order code	Description	Watts (W)	Base	Volts (V)	Lumens at 120 V (lm)	Average life (hrs)	Filament type	Finish	Case qty (inner/master)
G16.5 (cont.)									
MOL : 2 7/8 in. (73 mm) LCL : 2 1/16 in. (52 mm)									
50779	25G16.5/WH/3M/E14/130V/STD	25	E14	130	150	3 000	CC-6	White	25/500
50778	40G16.5/CL/3M/E14/130V/STD	40	E14	130	315	3 000	CC-6	Clear	25/500
50782	60G16.5/WH/3M/E14/130V/STD	60	E14	130	580	3 000	CC-6	White	25/500
G25									
MOL : 2 1/2 in. (114 mm) LCL : 3 1/32 in. (77 mm)									
50199	25G25/CL/3M/130V/STD	25	E26	130	135	3 000	C-9	Clear	6/60
50196	25G25/WH/3M/130V/STD	25	E26	130	115	3 000	C-9	White	6/60
50222	40G25/CL/3M/130V/STD	40	E26	130	255	3 000	C-9	Clear	6/60
50155	40G25/WH/3M/130V/STD	40	E26	130	230	3 000	C-9	White	6/60
G30									
MOL : 5 13/32 in. (137 mm) LCL : 3 9/32 in. (83 mm)									
50203	25G30/CL/3M/130V/STD	25	E26	130	115	3 000	C-9	Clear	6/60
50204	40G30/CL/3M/130V/STD	40	E26	130	230	3 000	C-9	Clear	6/60
50202	40G30/WH/3M/130V/STD	40	E26	130	215	3 000	C-9	White	6/60
G40									
MOL : 6 15/16 in. (176 mm) LCL : 3 29/32 in. (99 mm)									
50205	25G40/CL/3M/130V/STD	25	E26	130	100	3 000	C-9	Clear	6/12
50209	25G40/WH/3M/130V/STD	25	E26	130	100	3 000	C-9	White	6/12
50206	40G40/CL/3M/130V/STD	40	E26	130	230	3 000	C-9	Clear	6/12
50150	40G40/WH/3M/130V/STD	40	E26	130	215	3 000	C-9	White	6/12
50111	60G40/CL/3M/130V/STD	60	E26	130	465	3 000	C-9	Clear	6/12
50158	60G40/WH/3M/130V/STD	60	E26	130	365	3 000	C-9	White	6/12
50207	100G40/CL/3M/130V/STD	100	E26	130	760	3 000	C-9	Clear	6/12
50210	100G40/WH/3M/130V/STD	100	E26	130	820	3 000	C-9	White	6/12
50208	150G40/CL/3M/130V/STD	150	E26	130	1 175	3 000	C-9	Clear	6/12
50112	150G40/WH/3M/130V/STD	150	E26	130	1 175	3 000	C-9	White	6/12
PS25									
MOL : 6 15/16 in. (176 mm) LCL : 5 1/32 in. (128 mm)									
50140	150PS25/CL/5M/130V/STD	150	E26	130	1 210	5 000	C-9	Clear	6/24
50071	300PS25/CL/5M/130V/STD	300	E26	130	2 725	5 000	C-9	Clear	6/24
50088	300PS25/F/5M/130V/STD	300	E26	130	2 725	5 000	C-9	Frost	6/24
PS30									
MOL : 8 1/16 in. (204 mm) LCL : 5 13/32 in. (137 mm)									
52428	300PS30/CL/120V/STD	300	E26	120	3 600	5 000	C-9	Clear	6/24
51122	300PS30/F/5M/130V/STD	300	E26	130	2 725	5 000	C-9	Frost	6/24
PS35									
MOL : 9 13/32 in. (239 mm) LCL : 6 1/2 in. (165 mm)									
50225	300PS35/CL/5M/E39/130V/STD	300	E39	130	2 725	5 000	C-9	Clear	6/24
50226	300PS35/F/5M/E39/130V/STD	300	E39	130	2 725	5 000	C-9	Frost	6/24
50227	500PS35/CL/5M/E39/130V/STD	500	E39	130	6 055	5 000	C-9	Clear	6/24
50228	500PS35/F/5M/E39/130V/STD	500	E39	130	6 055	5 000	C-9	Frost	6/24
R14									
MOL : 2 1/8 in. (54 mm) LCL : 1 21/32 in. (42 mm)									
50665	25R14/FL/1.5M/120V/STD	25	E26	120	150	1 500	CC-2V	Clear	6/120
50663	40R14/CL/FL/1.5M/120V/STD	40	E26	120	280	1 500	CC-2V	Clear	6/120
MOL : 2 9/16 in. (65 mm) LCL : 1 31/32 in. (50 mm)									
50666	25R14/FL/1.5M/E17/120V/STD	25	E17	120	150	1 500	CC-2V	Clear	6/120
R16									
MOL : 3 1/2 in. (89 mm)									
52168	25R16/SF/1.5M/E12/130V/STD	25	E12	130	120	3 000	CC-2V	Frost	25/500
R19									
MOL : 3 31/32 in. (101 mm) LCL : 3 1/32 in. (77 mm)									
50136	40R19/SW/1.5M/120V/STD	40	E26	120	320	1 500	CC-6	Soft white	6/60
50138'	75R19/SW/1.5M/120V/STD	75	E26	120	770	1 500	CC-6	Soft white	6/60
R20									
MOL : 3 29/32 in. (99 mm) LCL : 2 15/16 in. (75 mm)									
50211	30R20/SP/5M/130V/STD	30	E26	130	145	5 000	C-9	Clear	6/60
50215	30R20/FL/5M/130V/STD	30	E26	130	130	5 000	C-9	Frost	6/60
61703	45R20/FL/5M/130V/STD	45	E26	130	255	5 000	CC-6	Frost	6/60
61705	45R20/SP/5M/130V/STD	45	E26	130	255	5 000	CC-6	Frost	6/60

*This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.

Order code	Description	Watts (W)	Base	Volts (V)	Lumens at 120 V (lm)	Average life (hrs)	Filament type	Finish/Colour	Case qty (inner/master)
S11									
MOL : 2 5/16 in. (59 mm) LCL : 1 1/2 in. (38 mm)									
50789	5S11/CL/1M/E17/130V/STD	5	E17	130	25	1 000	C-7A	Clear	25/500
50143	10S11/CL/1M/E17/130V/STD	10	E17	130	60	1 000	C-7A	Clear	6/120
50165	10S11/F/1M/E17/130V/STD	10	E17	130	60	1 000	C-7A	Frost	6/120
50786	25S11/CL/1M/E17/130V/STD	25	E17	130	130	1 000	C-7A	Clear	25/500
50123	40S11/CL/1M/E17/130V/STD	40	E17	130	275	1 000	C-7A	Clear	6/120
S14									
MOL : 2 5/16 in. (59 mm) LCL : 1 1/2 in. (38 mm)									
59542	11S14/CL/8M/130V/STD	11	E26	130	40	8 000	C-9	Clear	6/24
50147	11S14/CL/3M/130V/STD	11	E26	130	72	3 000	C-9	Clear	25/500
10158	11S14/F/3M/130V/STD	11	E26	130	50	3 000	C-9	Frost	25/500
T6									
MOL : 3 1/16 in. (78 mm) LCL : 1 9/16 in. (40 mm)									
50667	15T6/CL/7.5M/E12/130V/STD	15	E12	130	75	7 500	C-5A	Clear	12/120
50668	15T6/CL/7.5M/E12/145V/STD	15	E12	145	90	7 500	C-5A	Clear	12/120
50675	15T6/CL/5M/E17/130V/STD	15	E17	130	70	5 000	C-5A	Clear	12/120
50676	15T6/CL/7.5M/E17/145V/STD	15	E17	145	90	7 500	C-5A	Clear	12/120
T6.5									
MOL : 5 13/32 in. (137 mm) LCL : 3 5/32 in. (80 mm)									
51052	20T6.5/CL/5M/BA15d/130V/STD	20	BA15d	130	115	5 000	C-8	Clear	25/500
50679	20T6.5/F/5M/BA15d/130V/STD	20	BA15d	130	115	5 000	C-8	Frost	12/120
50677	20T6.5/CL/5M/E17/130V/STD	20	E17	130	115	5 000	C-8	Clear	12/120
50678	20T6.5/F/5M/E17/130V/STD	20	E17	130	115	5 000	C-8	Frost	12/120
51056	25T6.5/CL/5M/BA15d/125V/STD	25	BA15d	125	180	5 000	C-8	Clear	25/500
50674	25T6.5/CL/7.5M/BA15d/145V/STD	25	BA15d	145	180	7 500	C-8	Clear	12/120
50729	25T6.5/F/7.5M/BA15d/145V/STD	25	BA15d	145	145	7 500	C-8	Frost	25/500
50671	25T6.5/CL/5M/E12/130V/STD	25	E12	130	135	5 000	C-8	Clear	12/120
50672	25T6.5/CL/7.5M/E12/145V/STD	25	E12	145	180	7 500	C-8	Clear	12/120
50669	25T6.5/CL/5M/E17/130V/STD	25	E17	130	135	5 000	C-8	Clear	12/120
50670	25T6.5/CL/7.5M/E17/145V/STD	25	E17	145	180	7 500	C-8	Clear	12/120
50673	25T6.5/F/7.5M/E17/145V/STD	25	E17	145	180	7 500	C-8	Frost	25/500
50680	40T6.5/CL/5M/E17/130V/STD	40	E17	130	280	5 000	C-8	Clear	12/120
52191	40T6.5/F/5M/E17/130V/STD	40	E17	130	210	5 000	C-8	Frost	25/500
T7									
MOL : 2 5/16 in. (59 mm) LCL : 1 5/16 in. (33 mm)									
52195	15T7/CL/1.5M/BA15d/120V/STD	15	BA15d	120	100	1 500	C-7A	Clear	25/1 000
52196	15T7/F/1.5M/BA15d/130V/STD	15	BA15d	130	75	1 500	C-7A	Frost	25/1 000
52192	15T7/CL/1.5M/E12/120V/STD	15	E12	120	100	1 500	C-7A	Clear	25/1 000
52201	25T7/CL/1.5M/E12/130V/STD	25	E12	130	115	1 500	C-7A	Clear	25/1 000
T8									
MOL : 2 9/16 in. (65 mm) LCL : 1 5/8 in. (41 mm)									
52198	25T8/CL/1.5M/BA15d/120V/STD	25	BA15d	120	220	1 500	C-7A	Clear	25/1 000
52200	25T8/CL/1.5M/E12/120V/STD	25	E12	120	220	1 500	C-7A	Clear	25/1 000
52197	25T8/CL/1.5M/E17/120V/STD	25	E17	120	220	1 500	C-7A	Clear	25/1 000
T10									
MOL : 5 in. (127 mm) LCL : 2 3/4 in. (70 mm)									
50923	15T10/CL/3M/130V/STD	15	E26	130	75	3 000	C-5V	Clear	6/120
50925	25T10/CL/3M/130V/STD	25	E26	130	135	3 000	C-5V	Clear	6/120
50928	25T10/F/3M/130V/STD	25	E26	130	135	3 000	C-5V	Frost	6/120
50926	40T10/CL/3M/130V/STD	40	E26	130	195	3 000	C-5V	Clear	6/120
50929	40T10/F/3M/130V/STD	40	E26	130	195	3 000	C-5V	Frost	6/120
50930 ¹	60T10/F/3M/130V/STD	60	E26	130	365	3 000	C-5V	Frost	6/120
T10 HO									
MOL : 5 13/32 in. (137 mm) LCL : 3 11/32 in. (85 mm)									
50149	25T10/CL/3M/HO/130V/STD	25	E26	130	175	3 000	C-8	Clear	6/120
50131	25T10/F/3M/HO/130V/STD	25	E26	130	175	3 000	C-8	Frost	6/120
50129	40T10/CL/3M/HO/130V/STD	40	E26	130	300	3 000	C-8	Clear	6/120
50132	40T10/F/3M/HO/130V/STD	40	E26	130	300	3 000	C-8	Frost	6/120

¹This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.

Safety Max™ Lamps



With STANDARD Safety Max™, you protect the products of the production line, without sacrificing lumen output. Should a Safety Max™ lamp break, virtually all glass, mercury, metal and phosphors are contained by the safety coating. Disposal and lamp changes are also easy and safe.

Therefore, you can prevent contamination, minimize risk and avoid your business being shut down.

Order code	Description	Watts	Base	Volts	Lumens at 120 V (lm)	Average life (hrs)	Filament type	Coating	Finish	MOL		LCL		Case qty (inner/master)
		(W)		(V)						(in.)	(mm)	(in.)	(mm)	
A15														
46086	15A15/CL/5M/130V/STD SM	15	E26	130	90	5000	C-9	Mylon	Clear	3.5	89.0	2.4	60	6/60
46063	25A15/F/5M/130V/STD SM	25	E26	130	150	5000	C-9	Mylon	Frost	3.5	89.0	2.4	60	6/60
11790	40A15/IF/250V/SM	40	E26	250	300	5000	C-9	PTFE ¹	Frost	3.5	89.0	2.4	60	1/25
A19														
10123	25A19/F/6M/130V/STD SM	25	E26	130	168	6000	C-9	Silicone	Frost	4.2	108	2.9	73	24/120
10124	40A19/F/6M/130V/STD SM	40	E26	130	300	6000	C-9	Silicone	Frost	4.2	108	3.1	79	24/120
10128	50A19/F/RS/130V/STD SM	50	E26	130	420	5000	C-9	Silicone	Frost	4.2	108	2.6	65	24/120
51092	60A19/F/6M/130V/STD SM	60	E26	130	670	6000	C-9	Silicone	Frost	4.2	108	3.1	79	6/24
10131	60A19/F/RS/130V/STD SM	60	E26	130	565	5000	C-9	Silicone	Frost	4.2	108	3.1	79	6/24
10129	75A19/F/RS/130V/STD SM	75	E26	130	727	5000	C-9	Silicone	Frost	4.2	108	3.1	79	6/24
10130	100A19/F/RS/130V/STD SM	100	E26	130	1050	5000	C-9	Silicone	Frost	4.2	108	3.1	79	6/24
A21														
10372	100A21/F/5M/130V/STD SM	100	E26	130	1030	5000	C-9	Silicone	Frost	5.3	135	3.5	90	6/24
10127	100A21/F/RS/130V/STD SM	100	E26	130	1050	5000	C-9	Silicone	Frost	5.3	135	3.9	98	6/24
46092	135A21/F/8M/K/130V/STD SM	135	E26	130	1300	8000	C-9	Mylon	Frost	5.3	135	3.5	90	6/120
50911	150A21/F/5M/130V/STD SM	150	E26	130	1650	5000	C-9	Silicone	Frost	5.3	135	3.5	90	6/24
52046	150A21/F/RS/130V/STD SM	150	E26	130	1700	5000	C-9	Silicone	Frost	5.3	135	3.5	90	6/24
A23														
46091	150A23/F/5M/130V/STD SM	150	E26	130	1650	5000	C-9	Mylon	Frost	6.2	157	5.1	128	6/120
50912	200A23/F/5M/130V/STD SM	200	E26	130	2400	5000	C-9	Silicone	Frost	6.2	157	5.1	128	20/60
10125	200A23/F/RS/130V/STD SM	200	E26	130	2335	5000	C-9	Silicone	Frost	6.3	160	4.6	117	6/24
B10														
10119	60B10/CL/3M/130V/STD SM	60	E26	130	550	3000	C-9	Silicone	Clear	3.9	99	2.1	53	6/24
BR30 - BR38 - BR40														
10120	65BR30/FL/5M/130V/STD SM	65	E26	130	620	5000	C-9	Silicone	Clear	5.3	136	3.7	92	6/24
10121	120BR40/FL/5M/130V/STD SM	120	E26	130	1710	5000	C-9	Silicone	Clear	6.5	165	3.9	98	6/24
52044	250BR40/IR/CL/5M/120 130V/STD SM	250	E26	120	2400	5000	C-9	PTFE	Clear	6.5	165	4.3	108	1/12
F15														
10122	60F15/CL/3M/130V/STD SM	60	E26	130	600	3000	C-9	Silicone	Clear	4.5	165	2.5	62	6/24
PS25 - PS35														
10254	150PS25/F/RS/130V/STD SM	150	E26	130	1950	3000	C-9	Silicone	Frost	6.9	176	5.3	133	20/60
10126	300PS25/F/5M/130V/STD SM	300	E26	130	6280	5000	C-9	Silicone	Frost	6.9	176	5.3	133	6/24
R12 - R20 - R40														
11813	20R12/CL/13V/ BA15S/SM	20	BA15s	13	N/A	300	C-8	Mylon	Clear	2.6	66	N/A	N/A	10/50
46079	30R20/FL/5M/130V/STD SM	30	E26	130	135	5000	C-9	Mylon	Clear	3.9	100	3.0	75	6/60
46062	250R40/IR/R/5M/120 130V/STD SM	250	E26	120	N/A	5000	C-9	PTFE	Red	6.6	167	3.9	99	1/12
46151	375R40/IR/CL/5M/115 125V/STD SM	375	E26	115	N/A	5000	C-9	PTFE	Clear	7.6	193	4.2	106	1/12
T10														
46078	25T10/CL/3M/HO/130V/STD SM	25	E26	130	210	3000	C-8	Mylon	Clear	5.4	137	3.3	85	1/360
10005	40T10/CL/3M/HO/130V/STD SM	40	E26	130	350	3000	C-8	Mylon	Clear	5.4	137	3.3	85	6/120