

ORDERING INFORMATION

Order code: 10917
 Description: F32T8/850K/XL31
 UPC: 69549109179
 Case quantity: 25




Nominal length : 48 in. (915 mm) Dia. : 1 in. (26 mm)


PERFORMANCE DATA

Shape:	T8
Base:	G13 (Med Bipin)
Starting method:	Rapid Start (RS)
Wattage (W):	32
Colour temperature (K):	5 000
CRI:	89
Rated life on IS ¹ ballast:	
Based on a 3 hour start	20 000
Based on a 12 hour start	24 000
Rated life on PS/PRS ¹ ballast:	
Based on a 3 hour start	24 000
Based on a 12 hour start	30 000
Initial lumens (lm):	3 000
Mean lumens (lm):	2 850
Nominal efficiency (lm/W):	94
TCLP compliant:	Yes
Phosphor composition:	Triphosphor
Nominal lamp operating frequency (Hz):	60
² Minimum starting temperature (°C):	-10

DIMENSIONS

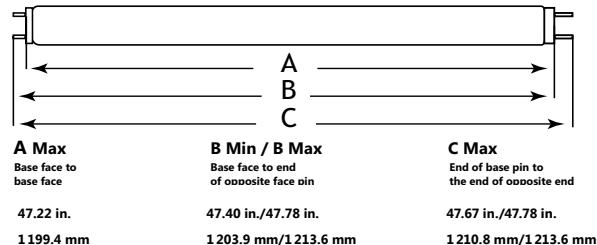

SPECTRAL DISTRIBUTION

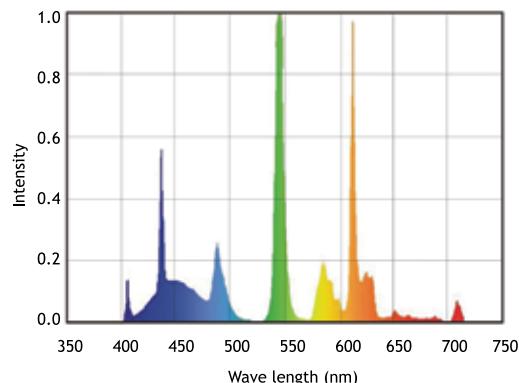

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 XL31 ballast.



E Means this bulb meets federal minimum efficiency standards.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

June 2, 2014

STANDARD™