




**Non-reversing motor starter**  
**NEMA controller size 0**  
**3-Phase, 3-Pole**  
**Maximum voltage rating 600VAC**  
**Max Hp 60Hz: 2@200V; 2@230V; 5@460V; 5@575V**  
**Solid-state overload relay(s) with 3–12A range**  
**Control voltage 110VAC 50Hz / 120VAC 60Hz**  
**NEMA Type 1 enclosure**





Image is representative and may not depict the actual product.

| General technical data:                           |                                                        |
|---------------------------------------------------|--------------------------------------------------------|
| Weight                                            | 8 lb                                                   |
| Height x Width x Depth                            | 11 x 7 x 5 in.                                         |
| Finger-safe (main circuit / control circuit)      | NA / NA                                                |
| Maximum altitude                                  | 6560 ft                                                |
| Ambient storage temperature                       | (-30 to 65)°C / (-22 to 149)°F                         |
| Ambient operating temperature                     | (-20 to 40)°C / (-4 to 104)°F                          |
| Humidity (% non-condensing)                       | (no data)                                              |
| Rated impulse voltage resistance                  | (no data)                                              |
| Rated insulation voltage                          | (no data)                                              |
| Country of origin                                 | USA                                                    |
| Contactor:                                        |                                                        |
| Number of NO main contacts                        | 3                                                      |
| Amp rating                                        | 18A                                                    |
| Mechanical operating cycles                       | 10,000,000                                             |
| Internal/standard auxiliary contact:              |                                                        |
| Number of NC / NO auxiliary contacts              | 0NC / 1NO                                              |
| Rating                                            | 10A@600VAC (A600), 5A@600VDC (P600)                    |
| Optional auxiliary contact:                       |                                                        |
| Max number of NC / NO auxiliary contacts          | 8 total                                                |
| Rating                                            | 10A@600VAC (A600), 5A@600VDC (P600)                    |
| Coil:                                             |                                                        |
| Voltage                                           | 110VAC 50Hz / 120VAC 60Hz Coil                         |
| Sealed watts                                      | 8.6W                                                   |
| Inrush / sealed power                             | 218 / 25 VA                                            |
| Normal coil operating limits (% of rated voltage) | 85% - 110%                                             |
| Typical drop-out volts (% of rated voltage)       | 50%                                                    |
| Pick-up time / Drop-out time                      | 19-29 / 10-24 msec                                     |
| Overload Relay:                                   |                                                        |
| Current range                                     | 3–12A                                                  |
| Trip Class                                        | Class 5 / 10 / 20 (factory set) / 30                   |
| Trip detection                                    | Overload, phase failure, phase unbalance, ground fault |
| Phase failure sensitivity                         | Trip time after phase-loss: < 3 sec                    |
| Repeat accuracy                                   | Within 1%                                              |
| Reset options                                     | Manual, automatic and remote                           |
| External reset                                    | Yes                                                    |
| Test function                                     | Electronics & manual actuation                         |
| Conformal coating on printed circuit board        | Yes                                                    |
| Number of NC / NO auxiliary contacts              | 1NC / 1NO                                              |
| Rating of auxiliary contacts                      | 5A@600VAC (B600), 1A@250VDC (R300)                     |
| Single contact isolation                          | 600V                                                   |

|                                                    |                                                            |
|----------------------------------------------------|------------------------------------------------------------|
| Dual contact isolation                             | 300V differing polarity / 600V common polarity             |
| <b>Enclosure:</b>                                  |                                                            |
| Type                                               | NEMA Type 1 enclosure                                      |
| Rating                                             | Indoor general purpose use                                 |
| <b>Mounting/wiring:</b>                            |                                                            |
| Mounting orientation                               | Vertical                                                   |
| Mounting type                                      | Surface                                                    |
| Line side connection type / torque                 | Screw / 20 lb-in.                                          |
| Line side solid & stranded conductors              | 1x(14 - 2 AWG) 75°C AL or CU                               |
| Load side connection type / torque                 | Screw / 20 lb-in.                                          |
| Load side solid & stranded conductors              | 1x(14 - 2 AWG) 75°C AL or CU                               |
| Coil connection type / torque                      | Screw / 5 lb in. - 12 lb in.                               |
| Coil solid & stranded conductors                   | 2 x (16 - 12 AWG) CU 60/75°C                               |
| Main auxiliary contact connection type / torque    | Screw / 10 - 15 lb-in                                      |
| Main auxiliary contact solid & stranded conductors | 1 x (12 AWG), 2 x (16 - 14 AWG), 2 x (18 - 16 AWG) 75°C CU |
| OLR auxiliary contact connection type / torque     | Screw / 7 lb in. - 10 lb in.                               |
| OLR auxiliary contact solid & stranded conductors  | 2 x (20 - 14 AWG) CU 60/75°C                               |
| <b>Short circuit current rating:</b>               |                                                            |
| Fuses                                              | 10kA@600V (Class H or K); 100kA@600V (Class R or J)        |
| Thermal Magnetic Circuit Breaker                   | 14kA@240V; 10kA@600V                                       |
| <b>Certificates/approvals:</b>                     |                                                            |
|                                                    | <a href="#">UL (file no. E14900)</a>                       |
|                                                    | <a href="#">cUL (file no. E14900 for Canada)</a>           |
|                                                    | <a href="#">CSA (file no. 006535 C_000)</a>                |
|                                                    | <a href="#">ISO 9001 certification</a>                     |
| <b>Additional information:</b>                     |                                                            |
|                                                    | <a href="#">Brochure</a>                                   |
|                                                    | <a href="#">OLR instruction sheet &amp; trip curves</a>    |

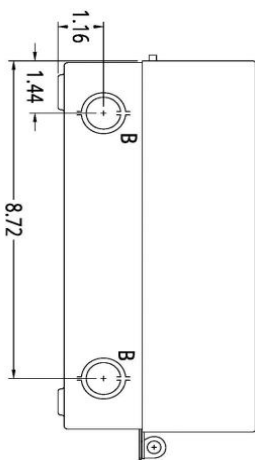

DIMENSIONS ARE IN INCHES.  
FILE NAME: SFIS-D68870001-0211

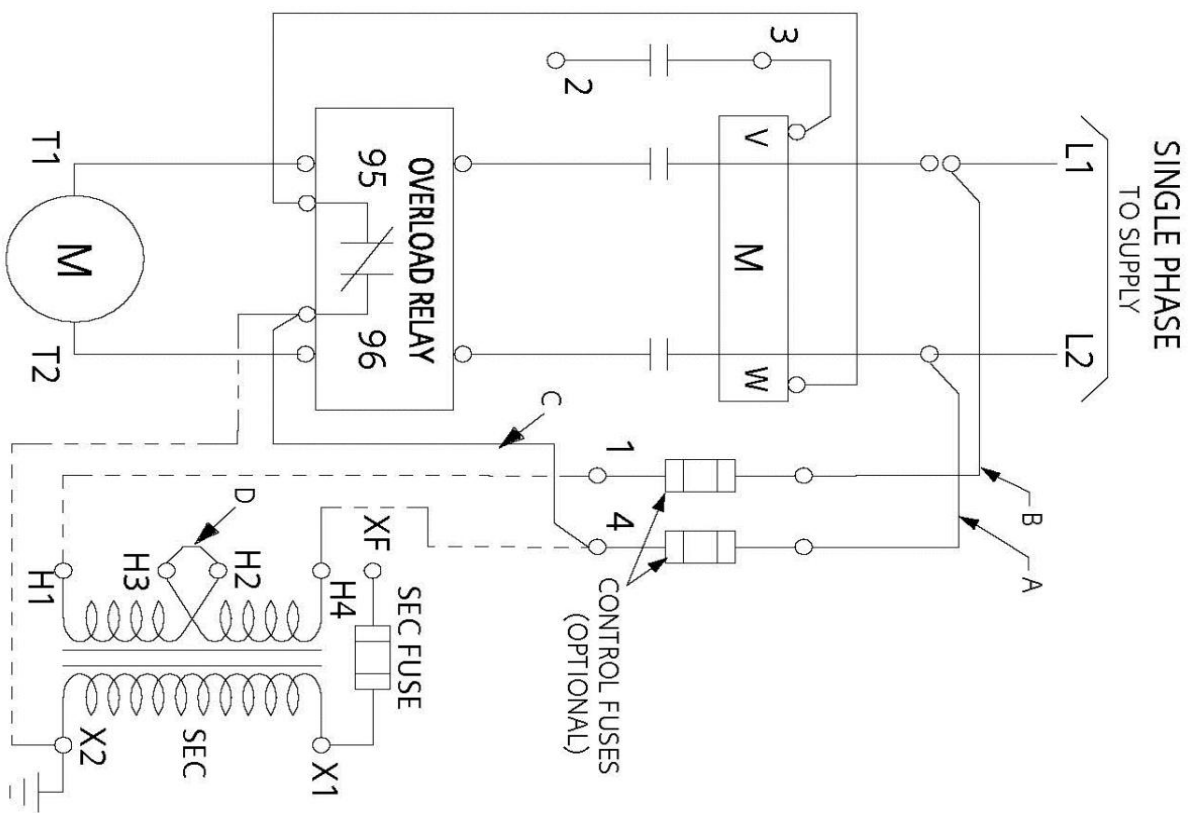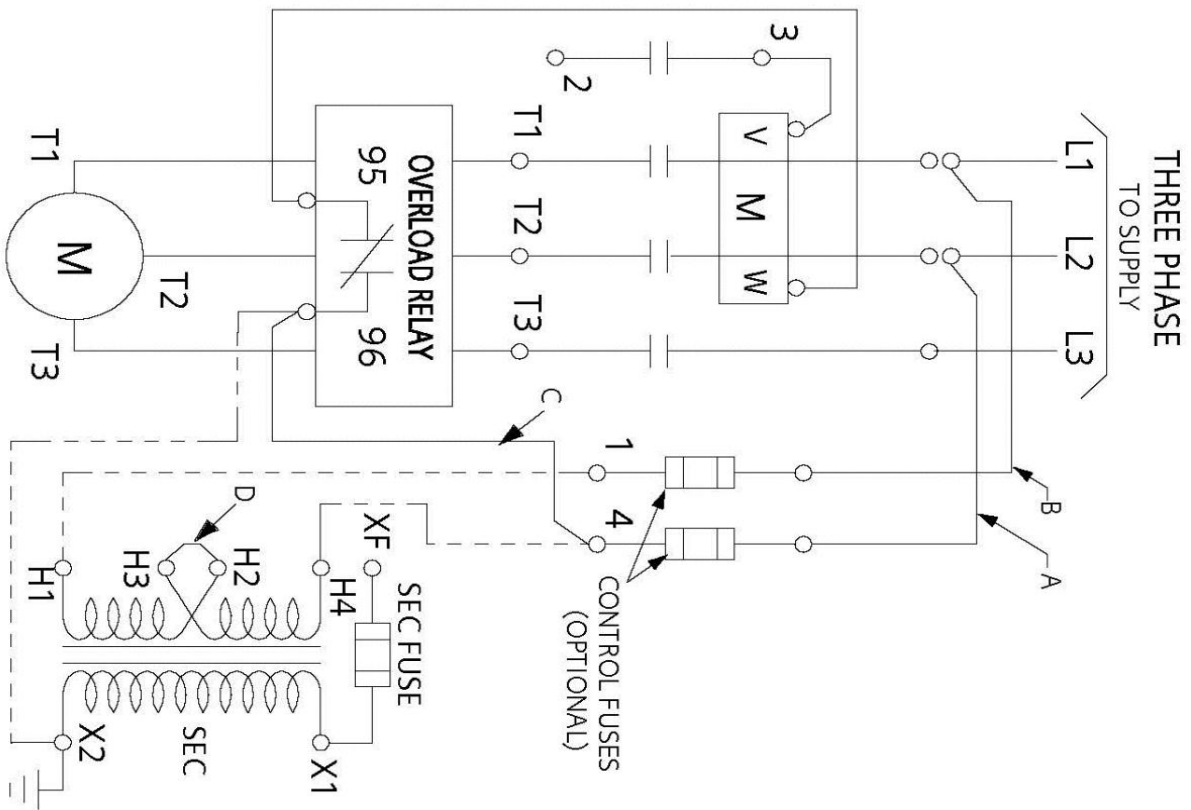

REF. D46590001