



HIGHLIGHTS

- 4" Commercial and Residential grade LED economical gimbal downlights with optical lens and improved directional lighting
- Ideal for sloped ceilings, wall washing, highlight artwork, task or general lighting, etc.
- Compatible with industry standard TRIAC / ELV dimmers
- Modular design contributes to Easy and Fast Installation — saves on labour
- IC rated for direct contact with insulation, no housing required
- Low power consumption which makes the LED Slim Light very economical
- Depth is 1-1/2", and for the best Layout Depth Flexibility, it should be installed right under joists
- Made of durable aluminum body and high quality steel material with 30° tilt and rotation
- High brightness COB LED's



MOUNTING

- Cut hole in ceiling and snap fixture in Opening with attached spring clips
- Ceiling clearance required: 2-1/2"

SPECIFICATIONS


Model	SLIM4GIM
Wattage	9W
Voltage	120V
Lumens	700 lm
Beam Angle	38°
Lifetime	50000 hours
Cutout	Ø 3-47/64" (95 mm)
CRI	80
Dimmable	Yes
Rating	IC Rated, Indoor use, for Damp location
Grade of Protection	IP 65
Air Tight	Yes
Applications	Recessed ceiling / Balcony / Overhanging eaves, etc.
Colour Temp.	3000K (Warm White) / 5000K (Cool White)
Operating Temp.	-20°C ~ +40°C
Warranty	5 years

DIMENSIONS

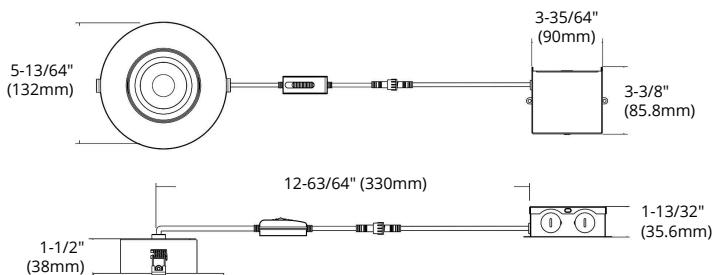


Installation
(Spring Clips)

EXPANSION FUNCTION



Back View

PACKAGING

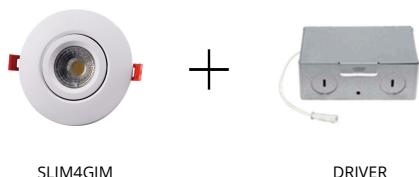

in 1 Packaging

Available in
following colours



- White
- Black

SLIM4GIM

DRIVER

SLIM4GIM-WH

SLIM4GIM-BK

**Compatible Dimmers &
Mounting Plates**
(sold separately)



DMD-ELV

Single pole
3-way dimmers



PLATE4-HB

Mounting Plates for
ORTECH 4" Slim Lights



PLATE26-4

New Construction Plates
for ORTECH 4" Slim Lights

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: