

WALL FAN HEATER

WF SERIES

VERSATILITY IS THE NAME OF THE GAME!

The WF is a high-capacity fan heater that's ideal for building lobbies, long corridors, stairwells, workshops, factories, and warehouses. Its electrical element is made of high-quality nichrome assuring an immediate surge of hot air. The various modes of wall installation make the WF heater one of the most versatile fan heaters on the market: it can be surface mounted or recessed, with a variety of models and heating capacities to choose from.



IMPROVED

3

YEAR
WARRANTY

NEW GRILLE WITH ROUNDED SIDES

DURABLE AND STYLISH

WIDE RANGE OF MODELS & HEATING CAPACITIES

INCLUDING A 4800 W SINGLE MODEL

NICHROME ELEMENT

ASSURING INSTANT HEAT

NEW DISCONNECT SWITCH

OPTIONAL

IDEAL FOR:

LOBBY, CORRIDOR, FACTORY, WAREHOUSE, STAIRWELL

COLOURS

- standard: white, silica white, silver
- luxurious finish: stainless steel

FINISH

epoxy-polyester powdercoat or stainless steel

MANUFACTURING

- 20-gauge steel cabinet and 18-gauge steel grille
- top air intake with bottom air discharge
- quiet helicoidal fan: single unit 1 x 160 CFM - double unit 2 x 160 CFM - triple unit 3 x 160 CFM
- thermal protection with automatic reset
- totally enclosed, permanently lubricated motor

ELEMENT

high quality nichrome element producing instant heat

CONTROL

connection of multiple units to the same thermostat is possible with a relay kit without transformer (optional) and an external transformer (not provided)

INSTALLATION


- wall mounted
- recessed or surface mounted with surface adapter (optional)

ACCESSORIES

PRODUCT	DESCRIPTION	
WFT1	built-in single pole thermostat [120 V-600 V]	
WFT2	built-in double pole thermostat [120 V-600 V]	
WFA1*	surface adapter (single unit)	
WFA2*	surface adapter (double unit)	
WFA3*	surface adapter (triple unit)	
WFA1SS	stainless steel surface adapter (single unit)	
WFA2SS	stainless steel surface adapter (double unit)	
WFA3SS	stainless steel surface adapter (triple unit)	
WFDIS-30*	disconnect switch kit 600 V/30 A, 2 poles	
WFDIS-40*	disconnect switch kit 600 V/40 A, 2 poles/3 poles	
WFDIS-60*	disconnect switch kit 600 V/60 A, 2 poles/3 poles	
WFC24RX*	relay kit without transformer 24 V	

* Add W for white, SW for silica white or S for silver

* Factory installation



ROUNDED SIDES


TECHNICAL SPECIFICATIONS

WITHOUT CONTROL			BUILT-IN THERMOSTAT			240 V CONTROL	24 V CONTROL		POWER	VOLTAGE	WEIGHT	MODEL	
CODE			CODE			CODE	CODE		WATTS	VOLTS	KG	LB	UNIT
WF1508			WF1508T			WF1508C	WF1508C24		1500	208	9	20	SINGLE
WF1502			WF1502T			WF1502C	WF1502C24		1500/1125	240/208	9	20	SINGLE
WF1507			WF1507T			WF1507C	WF1507C24		1500	277	9	20	SINGLE
WF1503			WF1503T			WF1503C	WF1503C24		1500	347	9	20	SINGLE
----			WF1505T			WF1505C	WF1505C24		1500	480	9	20	SINGLE
----			WF1506T			WF1506C	WF1506C24		1500	600	10	22	SINGLE
WF2008			WF2008T			WF2008C	WF2008C24		2000	208	9	20	SINGLE
WF2002			WF2002T			WF2002C	WF2002C24		2000/1500	240/208	9	20	SINGLE
WF2007			WF2007T			WF2007C	WF2007C24		2000	277	9	20	SINGLE
WF2003			WF2003T			WF2003C	WF2003C24		2000	347	9	20	SINGLE
----			WF2005T			WF2005C	WF2005C24		2000	480	9	20	SINGLE
----			WF2006T			WF2006C	WF2006C24		2000	600	10	22	SINGLE
WF3008			WF3008T			WF3008C	WF3008C24		3000	208	9	20	SINGLE
WF3002			WF3002T			WF3002C	WF3002C24		3000/2250	240/208	9	20	SINGLE
WF3007			WF3007T			WF3007C	WF3007C24		3000	277	9	20	SINGLE
WF3003			WF3003T			WF3003C	WF3003C24		3000	347	9	20	SINGLE
----			WF3005T			WF3005C	WF3005C24		3000	480	9	20	SINGLE
----			WF3006T			WF3006C	WF3006C24		3000	600	10	22	SINGLE
WF4008			WF4008T			WF4008C	WF4008C24		4000	208	9	20	SINGLE
WF4002			WF4002T			WF4002C	WF4002C24		4000/3000	240/208	9	20	SINGLE
WF4007			WF4007T			WF4007C	WF4007C24		4000	277	9	20	SINGLE
WF4003			WF4003T			WF4003C	WF4003C24		4000	347	9	20	SINGLE
----			WF4005T			WF4005C	WF4005C24		4000	480	9	20	SINGLE
----			WF4006T			WF4006C	WF4006C24		4000	600	10	22	SINGLE
WF4808			WF4808T			WF4808C	WF4808C24		4800	208	9	20	SINGLE
WF4802			WF4802T			WF4802C	WF4802C24		4800/3600	240/208	9	20	SINGLE
WF4807			WF4807T			WF4807C	WF4807C24		4800	277	9	20	SINGLE
WF4803			WF4803T			WF4803C	WF4803C24		4800	347	9	20	SINGLE
----			WF4805T			WF4805C	WF4805C24		4800	480	9	20	SINGLE
----			WF4806T			WF4806C	WF4806C24		4800	600	10	22	SINGLE
----			WF6008CT			WF6008C	WF6008C24		6000	208	18	40	DOUBLE
----			WF6002T			WF6002C	WF6002C24		6000/4500	240/208	18	40	DOUBLE
----			WF6007T			WF6007C	WF6007C24		6000	277	18	40	DOUBLE
----			WF6003T			WF6003C	WF6003C24		6000	347	18	40	DOUBLE
----			WF6005T			WF6005C	WF6005C24		6000	480	20	44	DOUBLE
----			WF6006T			WF6006C	WF6006C24		6000	600	20	44	DOUBLE
----			WF60083CT*			WF60083C*	WF60083C24*		6000	208	36	80	TRIPLE
----			WF60053CT*			WF60053C*	WF60053C24*		6000	480	36	80	TRIPLE
----			WF60063CT*			WF60063C*	WF60063C24*		6000	600	36	80	TRIPLE
----			WF8008CT			WF8008C	WF8008C24		8000	208	18	40	DOUBLE
----			WF8002CT			WF8002C	WF8002C24		8000/6000	240/208	18	40	DOUBLE
----			WF8007CT			WF8007C	WF8007C24		8000	277	18	40	DOUBLE
----			WF8003CT			WF8003C	WF8003C24		8000	347	18	40	DOUBLE
----			WF8005CT			WF8005C	WF8005C24		8000	480	20	44	DOUBLE
----			WF8006CT			WF8006C	WF8006C24		8000	600	20	44	DOUBLE
----			WF90083CT*			WF90083C*	WF90083C24*		9000	208	36	80	TRIPLE
----			WF90053CT*			WF90053C*	WF90053C24*		9000	480	36	80	TRIPLE
----			WF90063CT*			WF90063C*	WF90063C24*		9000	600	36	80	TRIPLE
----			WF12008CT			WF12008C	WF12008C24		12000	208	36	80	TRIPLE
----			WF12002CT			WF12002C	WF12002C24		12000/9000	240/208	36	80	TRIPLE
----			WF12007CT			WF12007C	WF12007C24		12000	277	36	80	TRIPLE
----			WF12003CT			WF12003C	WF12003C24		12000	347	36	80	TRIPLE
----			WF12005CT			WF12005C	WF12005C24		12000	480	36	80	TRIPLE
----			WF12006CT			WF12006C	WF12006C24		12000	600	36	80	TRIPLE
----			WF120083CT*			WF120083C*	WF120083C24*		12000	208	36	80	TRIPLE
----			WF120053CT*			WF120053C*	WF120053C24*		12000	480	36	80	TRIPLE
----			WF120063CT*			WF120063C*	WF120063C24*		12000	600	36	80	TRIPLE


Add W for white, SW for silica white, S for silver or SS for stainless steel

THROW DISTANCE AND HEAT RISE


UNITS		THROW DISTANCE		HEAT RISE	
KW	M	FT.	°C	°F	
1.5	4.1	13'7"	30	53	
2	4.1	13'7"	42	75	
3	4.1	13'7"	61	110	
4	4.1	13'7"	74	133	
4.8	4.1	13'7"	93	167	
6	4.1	13'7"	61	110	
8	4.1	13'7"	74	133	
9	4.1	13'7"	61	110	
12	4.1	13'7"	74	133	

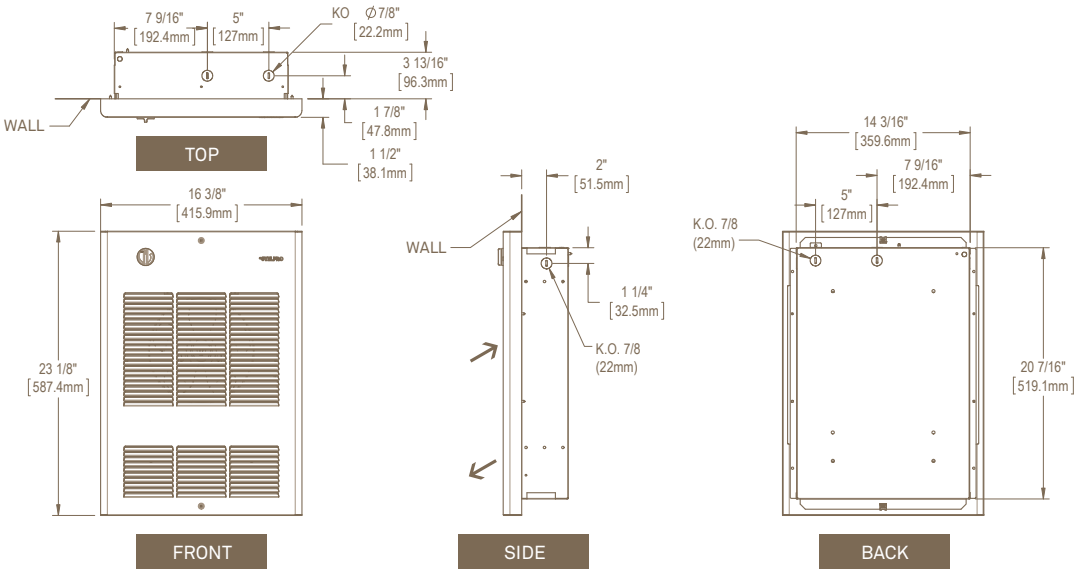

SINGLE UNIT

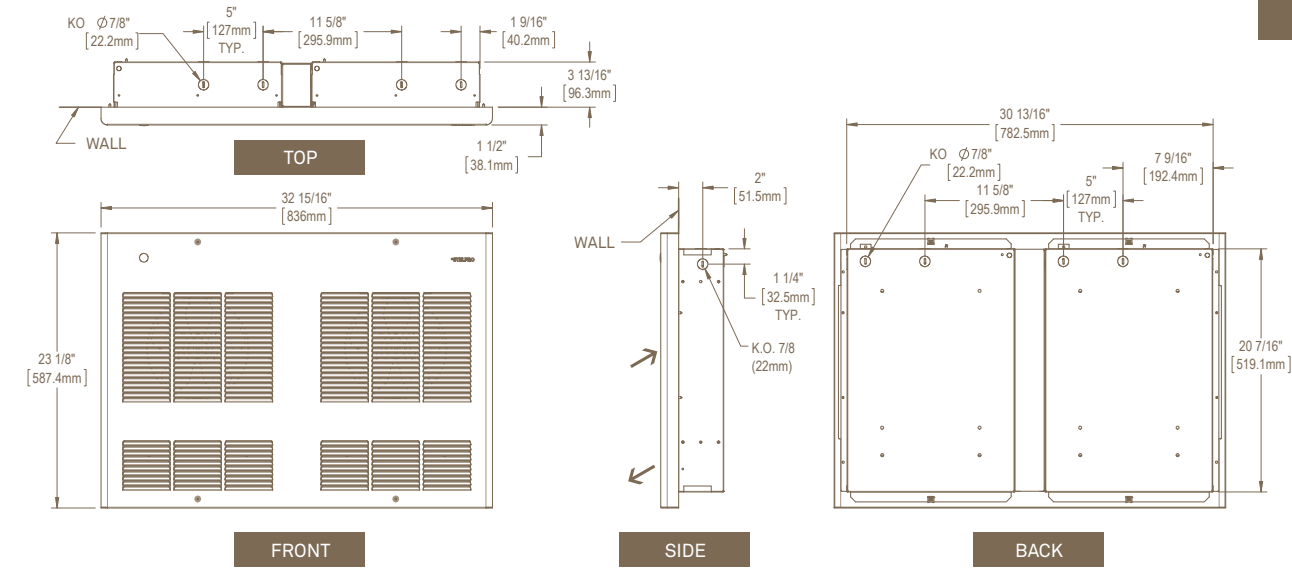

DOUBLE UNIT

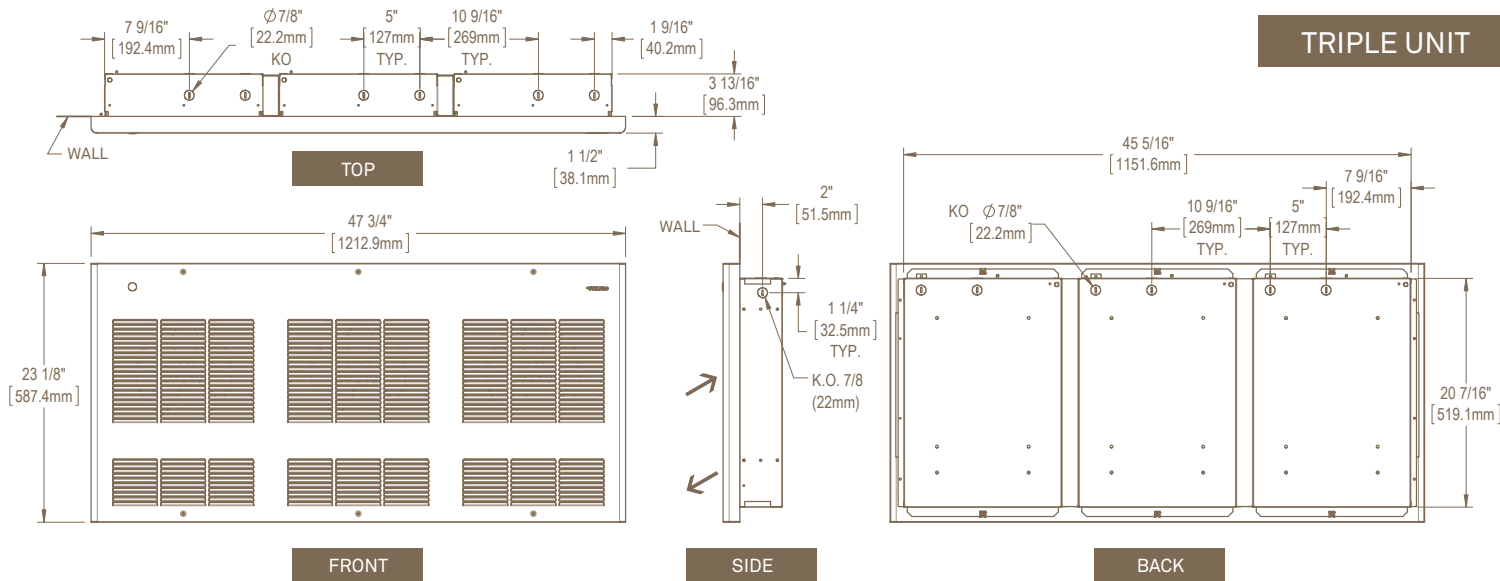

TRIPLE UNIT