


Eaton XTREC10B40A

Catalog number: XTREC10B40A

XT IEC Control Relay, Spring cage terminals, 45 mm - standard Frame size, 4NO contact configuration, 110V 50 Hz, 120V 60 Hz coil, 10A conventional thermal rating, 6A at 220/230/240V; 4A at 380/400/415V rated operational voltage

General specifications

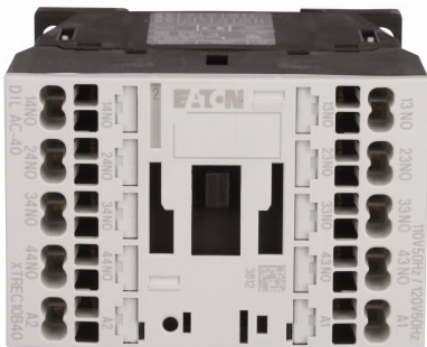

Product Name

Eaton XT IEC control relay

EAN

4015082764388

Product Height

2.97 in

Product Weight

.5 lb

Catalog Number

XTREC10B40A

Product Length/Depth

1.77 in

Product Width

2.68 in

Certifications

UL Listed

defaultTaxonomyAttributeLabel

Frame size

45 mm - standard

Contact configuration

4 NO

Coil voltage

110-120 Vac, 50/60 Hz

Type

Control relay

Terminals

Spring cage terminals

Rated operational current

6 A at 220/230/240 V

4 A at 380/400/415 V

Conventional thermal current

10A

Coil

110-120 Vac, 50/60 Hz

Resources

Catalogs

[Eaton's Volume 5—Motor Control and Protection](#)

Drawings

[XTREC 2D PDF](#)

[XTREC AutoCAD 2D Footprint](#)

[XTREC 3D Model Xchange](#)

[XTRM AutoCAD 2D Footprint \(mm\) 47478](#)

[XTREC 2D Drawing Xchange](#)

[XTREC 3D Inventor](#)

Specifications and datasheets

[Eaton Specification Sheet - XTREC10B40A](#)

[Global Data Sheet - XTREC10B40A](#)



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com
© 2022 Eaton
All Rights Reserved

Eaton is a registered trademark.

All other trademarks are
property of their respective
owners.



Eaton.com/socialmedia