


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



NOTES:

1. CONNECTORS ARE MADE OF HIGH STRENGTH ALUMINUM ALLOY, PRE-FILLED WITH OXIDE INHIBITOR COMPOUND.
2. CLEAR PVC INSULATION ELIMINATES NEED FOR TAPING.
3. REMOVABLE PLUGS IN EACH PORT PROVIDE EASY ACCESS FOR INSTALLATION.
4. FOR USE WITH ONE WIRE PORT.
5. CONNECTOR TO INCLUDE PLATED ALUMINUM SET SCREWS.
6. FOR USE WITH ANY COMBINATION FOR COPPER OR ALUMINUM CODE CONDUCTOR WIRE AL9CU RATED.
7. PACKAGE QTY: -1 = 1 PC.

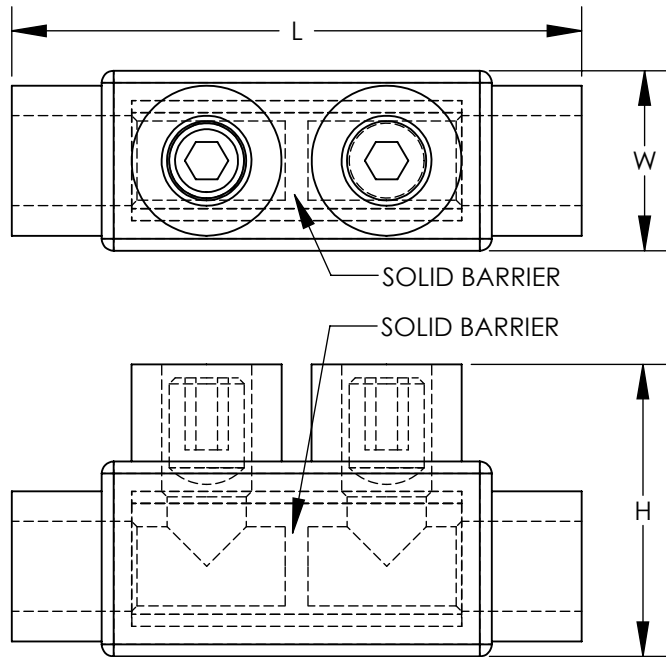

PANDUIT PART NUMBER	CONDUCTOR RANGE	WIRE STRIP LENGTH (IN)	APPROXIMATE DIMENSIONS - INCHES (+/- 0.13)			HEX SCREW SIZE (IN)	TIGHTENING TORQUE (IN-LB)
			L	W	H		
PISR2-1	2 STR. - 14 STR. 8 SOL. - 10 SOL.	0.63	2.38	0.75	1.25	5/32	100
PISR1/0-1	1/0 STR. - 14 STR. 8 SOL. - 14 SOL.	0.94	2.91	0.95	1.41	3/16	120
PISR250-1	250 kcmil - 10 STR. 8 SOL. - 10 SOL.	1.12	4.00	1.25	2.24	5/16	275
PISR350-1	350 kcmil - 10 STR. 8 SOL. - 10 SOL.	1.25	4.63	1.40	2.34	5/16	275
PISR500-1	500 kcmil - 6 STR.	1.62	5.25	1.72	2.63	3/8	500

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
06	2/13	JHNU	JHNU	RGB	REVISED TITLE BLOCK	N41359BA-C41359

TITLE
ALUMINUM CLEAR INSULATED INLINE SPLICER REDUCER (PISR SERIES)
CUSTOMER DRAWING

ITEM REVISION NAME C41359/06

DATASET FILE NAME C41359/06.SLDDRW

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .XXX ±
.XX ± ANGLES ±

MATERIAL
SEE NOTES

DRAWING NUMBER C41359_06

THIRD ANGLE PROJECTION

DRAWN BY JHNU DATE 5/05 CHK RLS SCALE NONE

SHEET 1 OF 1 SIZE A