

SKYE

4" & 6", 810-1520 Lumens, 12-16W, Color Selectable
Recessed Downlighting

Features

Body

Durable airtight aluminum body with UV stable paint and white PMMA diffuser lens for low glare. Includes silicone gasket for wet location applications. Includes White interchangeable magnetic trim.

LED Characteristics

This general application light fixture features a 12 watt (for 4") or 16 watt (for 6") LED module that maintains uniform intensity producing up to 1520 lumens; with a typical CRI of 90. Available with front facing 5 step CCT switch (2700 K, 3000 K, 3500 K, 4000 K and 5000 K).

Dimming

100%-10% dimming capability. This fixture is compatible with industry standard TRIAC/ELV dimmers. For compatible dimmers, visit www.liteline.com/SKYEdimmers.

Beam Spread

The fixture lens provides 75° (for 4") or 80° (for 6") beam spread.

Mounting

Includes two spring loaded clips to attached to any ceiling material.

LED Driver

Extruded aluminum hardware box with 300mA (for 4") or 370mA (for 6") dimmable class II electronic LED driver with 100-135V AC input. Includes an 18" plenum rated FT6 wire with DC 2.1 connector from driver to fixture.

Quick Connect push-in terminals

"Quick connect" push-in terminals for fast and easy wiring.

Start Up Temperature

-40°C (-40°F)


Environment

- Suitable for wet locations.
- Suitable for outdoor applications.
- Suitable for insulated ceiling applications.

SPECIFICATION

Application	Ceiling Recessed Mount
Approved Location	Wet / Outdoor / Insulated Ceilings
Beam Angle	4": 75° 6": 80°
CCT	2700 K / 3000 K / 3500 K / 4000 K / 5000 K
Certification	cETLus
Color	WH
CRI	90
Dimming	Yes
Dimming Tech	Forward/Reverse phase / TRIAC/ELV
Energy Star	Yes
Hole Cut	4" : Ø 4 1/4" (108mm) 6" : Ø 6 1/4" (159mm)
Input	100-135V AC, 60Hz
LM79	Yes
LM80	Yes
Lumens	Up to 1520
Lumens per Watt	Up to 96
Min. Operating Temp.	-40°C (-40°F)
Power Factor	0.9
Projected Life	70% @ 50,000 hrs
Title 24	JA8 (up to 4000 K)
Warranty	Lifetime
Wattage	12W / 16W

CCT	Lumens	
	SLMB4	SLMB6
2700 K	810	1360
3000 K	860	1400
3500 K	890	1500
4000 K	900	1520
5000 K	890	1500

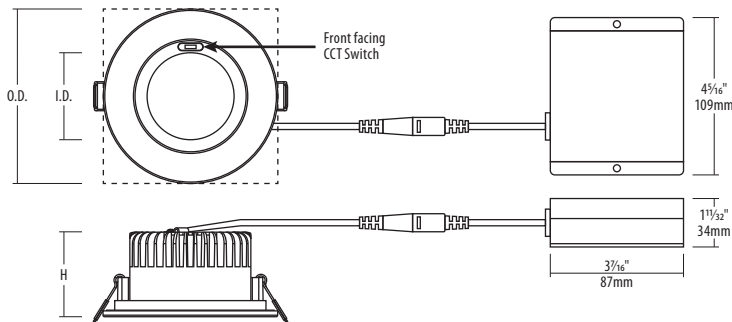

Size	O.D.	I.D.	H
SLMB4	4 3/4" (121mm)	2 3/8" (60mm)	2 5/8" (59mm)
SLMB6	6 13/16" (173mm)	4 3/8" (106mm)	3 1/8" (78mm)

Ordering Guide

Size	Size	Wattage	Driver Options	Trim Finish	Baffle Finish
SLMB					
4 : 4"	Leave blank for Round	12 : 12 watt ¹	Leave blank for standard 120V driver	WH : White	Leave blank (will match trim)
6 : 6"		16 : 16 watt ²	E : Lutron Hi-Lume 1% EcoSystem w/Soft-on, Fade-to-Black C : 120-347V, 0-10V EM : Emergency Backup, 120-277V, 0-10V		

QUICKSHIP 2-DAY

SKYSELECT
Dead-front

Select from above

Leave blank for Round
S : Square³

Select from above

Select from above

BK : Black
WH : White

BG : Gold
BK : Black⁶
SP : Specular
SS : Semi-specular
WH : White⁴

Liteline Corporation
Copyright © 2022
All rights reserved.

Telephone
416.996.1856
1.866.730.7704

Fax
905.709.5255
1.888.738.9736

LITELINE.COM

Job Information

Project Name		Type
Location		
Quantity		Date
Contact/Phone		
Notes		



Description

SKYE is a high-performance, easy to install residential and commercial downlight solution that offers good light output, energy-efficiency and streamlined design with interchangeable color trims and CCT selecting switch. Suitable for wet locations.

SKYE Select dead-front trims available to provide a 2-tone professional trim and baffle finish.

CCT5 WET LOCATION
ENDROITS
MOUILLES



JA8
TITLE 24

IC
RATED

AIR
TIGHT

LIFETIME

Notes:

¹ Available for 4" size only. ² Available for 6" size only. ³ Not available for 6" size. ⁴ Not available with BK Trim Finish. ⁵ Not available with WH Trim Finish. ⁶ Not available for SLMB4S-12W-CCT-BKBK. ⁷ Not available for SKYE SELECT models.

* QuickShip lead time may vary for orders greater than 100 pieces. No additional shipment rates apply. Subject to availability. Accessories are sold separately. For additional options please consult your Liteline representative. Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Accessories



SLMB4-12W-RT-BK
Magnetic trim for 4" SKYE fixtures,
round, black.



SLMB4-12W-RT-BN
Magnetic trim for 4" SKYE fixtures,
round, brushed nickel.



SLMB4-12W-RT-OB
Magnetic trim for 4" SKYE fixtures,
round, oil rubbed bronze.



P-4020
4¼" Round pre-mounting plate
with driver attachment clip, for 4"
SKYE fixtures.



SLM4P-XLRING-BK
Extra large trim ring for 4" SKYE,
metal, black.



SLM4P-XLRING-BN
Extra large trim ring for 4" SKYE, metal,
brushed nickel.



SLM4P-XLRING-WH
Extra large trim ring for 4" SKYE,
metal, white.



SLMB6-16W-RT-BK
Magnetic trim for 6" SKYE fixtures,
round, black.



SLMB6-16W-RT-BN
Magnetic trim for 6" SKYE fixtures,
round, brushed nickel.



SLMB6-16W-RT-OB
Magnetic trim for 6" SKYE fixtures,
round, oil rubbed bronze.



P-6020
6¼" Round pre-mounting plate
with driver attachment clip, for 6"
SKYE fixtures.



SLM6P-XLRING-BK
Extra large trim ring for 6" SKYE,
metal, black.



SLM6P-XLRING-BN
Extra large trim ring for 6" SKYE, metal,
brushed nickel.



SLM6P-XLRING-WH
Extra large trim ring for 6" SKYE,
metal, white.



SLM-60-FC
60" Flexible connector, for use with
SKYE fixtures.



P-NCMK-1
Hanger bar kit. Includes hanger bars,
brackets and screws.



VBE-1
Vapour barrier extender. For use in new
construction applications.



VBE-2
Vapour barrier extender. For use in
remodel applications.



VBE-3
Vapour barrier extender. For use in
remodel applications.



VBE-5
Vapour barrier extender. For use in new
construction applications.



LC-CRTL-3WAY-1
OnCloud Smart Wi-Fi 3-way switch.
Suitable for 3-way or 4-way switch
applications.



LC-CRTL-DIM-1
OnCloud Smart Wi-Fi dimmer. Features
an ON/OFF press and a 7 level
touch slider.

SKYESELECT



SLMB4-12W-RT-BKBG
SKYE Select trim, 4", dead front, round.
Black trim with Gold baffle.



SLMB4-12W-RT-BKBK
SKYE Select trim, 4", dead front, round.
Black trim with Black baffle.



SLMB4-12W-RT-BKSP
SKYE Select trim, 4", dead front, round.
Black trim with Specular baffle.



SLMB4-12W-RT-BKSS
SKYE Select trim, 4", dead front, round.
Black trim with Semi-specular baffle.



SLMB4-12W-RT-WHBG
SKYE Select trim, 4", dead front, round.
White trim with Gold baffle.



SLMB4-12W-RT-WHSP
SKYE Select trim, 4", dead front, round.
White trim with Specular baffle.



SLMB4-12W-RT-WHSS
SKYE Select trim, 4", dead front, round.
White trim with Semi-specular baffle.



SLMB4-12W-RT-WHWH
SKYE Select trim, 4", dead front, round.
White trim with White baffle.



SLMB4-12W-ST-BKBG
SKYE Select trim, 4", dead front, square.
Black trim with Gold baffle.



SLMB4-12W-ST-BKBK
SKYE Select trim, 4", dead front, square.
Black trim with Black baffle.



SLMB4-12W-ST-BKSP
SKYE Select trim, 4", dead front, square.
Black trim with Specular baffle.



SLMB4-12W-ST-BKSS
SKYE Select trim, 4", dead front, square.
Black trim with Semi-specular baffle.



SLMB4-12W-ST-WHBG
SKYE Select trim, 4", dead front, square.
White trim with Gold baffle.



SLMB4-12W-ST-WHSP
SKYE Select trim, 4", dead front, square.
White trim with Specular baffle.



SLMB4-12W-ST-WHSS
SKYE Select trim, 4", dead front, square.
White trim with Semi-specular baffle.



SLMB4-12W-ST-WHWH
SKYE Select trim, 4", dead front, square.
White trim with White baffle.



SLMB6-16W-RT-BKBG
SKYE Select trim, 6", dead front, round.
Black trim with Gold baffle.



SLMB6-16W-RT-BKBK
SKYE Select trim, 6", dead front, round.
Black trim with Black baffle.



SLMB6-16W-RT-BKSP
SKYE Select trim, 6", dead front, round.
Black trim with Specular baffle.



SLMB6-16W-RT-BKSS
SKYE Select trim, 6", dead front, round.
Black trim with Semi-specular baffle.



SLMB6-16W-RT-WHBG
SKYE Select trim, 6", dead front, round.
White trim with Gold baffle.



SLMB6-16W-RT-WHSP
SKYE Select trim, 6", dead front, round.
White trim with Specular baffle.



SLMB6-16W-RT-WHSS
SKYE Select trim, 6", dead front, round.
White trim with Semi-specular baffle.



SLMB6-16W-RT-WHWH
SKYE Select trim, 6", dead front, round.
White trim with White baffle.