

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LED TAPE

LOW VOLTAGE TAPE

24 V

ORDERING INFORMATION

Order code: 65881
 Description: TAPE/16.4/1.5W/30K/24V/IP22/60/8MM/STD
 UPC: 069549658810
 Case quantity: 25

PHYSICAL DATA

Reel Total Length: 16.4 ft. (5 m)
 Jacketed or Unjacketed: Unjacketed
 Wire gauge: 22 AWG
 Number of LEDs: 60 LEDs per meter
 Cuttable length: 18 LEDs per foot
 Maximum run length: 3 $\frac{15}{16}$ in. (100 mm) or every 6 LED chips
 Operating Temperature: 61 ft. (19 m)
 -25°C / -13°F to 40°C / 104°F



PERFORMANCE DATA

Volts (V): 24
 Color temperature (K): 3 000 (Neutral white)
 Watts per length: 24 W per reel
 Efficacy (lm/W): 4.8 W per meter
 Light output per length: 0.12 W per inch
 Beam angle (°): 1 750 lm per reel
 CRI: 73
 Life (hrs): 350 lm per meter
 Beam angle (°): 9 lm per inch
 Beam angle (°): 50 000
 Beam angle (°): 120

¹ Typical Color temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 5 %

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

3
yrs
warranty



dimmable




dry
location



Extrusions, drivers and accessories are available (sold separately).
 Custom lengths available upon request. Ask your sales representative for more information.
 This LED Tape is also available in 2.9 W and 4.4 W and in 12 V.

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

DIMENSIONS

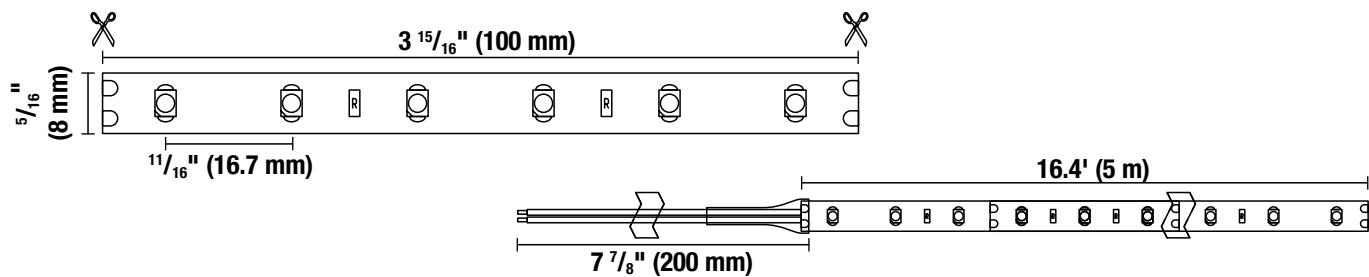

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.