

INSTALLATION INSTRUCTIONS

Read instructions carefully before attempting to install fixture. Save these instructions.

WARNING: Disconnect power during installation and before servicing.

SAFETY: This fixture must be wired in accordance with the Canadian Electrical Code, and applicable local codes and ordinances.

Proper grounding is required to insure personal safety.

A qualified electrician should perform all wiring.

These fixtures are designed for Outdoor use, wet location use not to exceed 40°C ambient.

Junction Box Mounting:

1. Install the fixture to wall surface according to Fig 1 & 2,
2. Open the fixture by removing the four (4) screws located on the corners of the front housing.
3. Mount the fixture back plate to the J-Box (not provided), using the appropriate knock-out holes.
4. Make wiring connections and make sure that all wires are safely contained inside.
5. Reinstall the front fixture housing, tighten the four corner screws.
6. After installing the fixture, apply silicone caulking around the top and both sides of the mounting plate and wall surface to ensure a weatherproof installation.




Fig. 1

Wiring Connections:

CAUTION: Check that supply voltage is compatible with fixture ballast. Use approved connectors for all electrical connections.

- Connect the black fixture wire to the black supply wire (line).
- Connect the white fixture wire to the white supply wire (neutral).
- Connect the green fixture wire to the junction box ground wire.

Use MIN. 90°C Supply Conductors.

MAX. 4-12AWG thru-branch circuit conductors suitable for 90°C

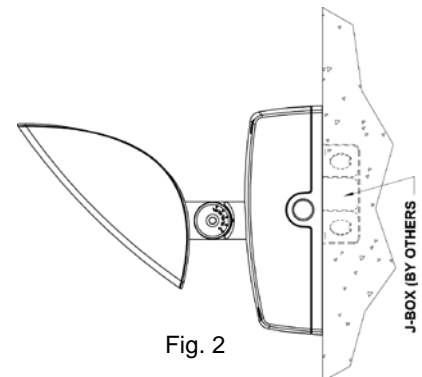


Fig. 2

Aiming:

Set vertical aiming by loosening (slightly) the screw on swivel arm. Aim fixture to desired illumination angle and securely re-tighten screw.

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation, operation or maintenance.