

CF

CEILING FAN HEATER



THE SPACE-SAVER

Stelpro has the perfect space-saving solution for heating small entryways, hallways and lobbies: the sturdy, reliable CF ceiling fan heater. Built to last, the CF pushes heat downward so that it mixes with the cold air below. It can be surface mounted or recessed into conventional ceilings or recessed in suspended ceilings. Whether installed in an entryway or hallway, the CF provides all the heat you need in an enclosed space.

GRILLE WITH ROUNDED SIDES DURABLE AND STYLISH

THE PERFECT SOLUTION FOR ENTRYWAYS AND HALLWAYS

CEILING MOUNTED PREVENTS VANDALISM

MULTIPLE INSTALLATION OPTIONS CAN BE SURFACE MOUNTED OR RECESSED – OR RECESSED IN A SUSPENDED CEILING

OPTIONAL DISCONNECT SWITCH AVAILABLE



ROUNDED SIDES

IDEAL FOR:

entryway, hallway, corridor, office building

COLOURS

- **standard:** white, soft white
- **Orora (optional):** refer to www.stelpro.com/en-CA/Orora

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 20-gauge steel cabinet and 18-gauge steel grille
- fan: 1 x 160 CFM (single unit) – 2 x 160 CFM (double unit)
- thermal protection with automatic reset

ELEMENT

- nichrome element producing instant heat

CONTROL

- connection of multiple units to the same thermostat is possible with a relay kit without transformer (optional) and an external transformer (not provided)
- built-in thermostat (optional), 3 control knobs included (white, soft white and black) for standard installation, without knob for tamper-proof installation

INSTALLATION

- ceiling
- recessed or surface mounted with surface adapter (optional)
- T-Bar adapter (optional)

WARRANTY

- three years

°STELPRO

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-colour products. For all the latest models and prices, please refer to our website at www.stelpro.com.



FC_CF_EN_180822

TECHNICAL SPECIFICATIONS

WITHOUT CONTROL		BUILT-IN THERMOSTAT		240 V CONTROL	24 V CONTROL		POWER	VOLTAGE	WEIGHT		MODEL
CODE	PRICE	CODE	PRICE	CODE	CODE	PRICE	WATTS	VOLTS	KG	LB	UNIT
CF1501	727.00	CF1501T	790.00	---	CF1501C24	924.00	1500	120	9	20	SINGLE
CF1508	727.00	CF1508T	790.00	CF1508C	CF1508C24	924.00	1500	208	9	20	SINGLE
CF1502	727.00	CF1502T	790.00	CF1502C	CF1502C24	924.00	1500/1125	240/208	9	20	SINGLE
CF1503	1041.00	CF1503T	1104.00	CF1503C	CF1503C24	1238.00	1500	347	9	20	SINGLE
---	---	CF1506T	1157.00	CF1506C	CF1506C24	1292.00	1500	600	10	22	SINGLE
CF2008	727.00	CF2008T	790.00	CF2008C	CF2008C24	924.00	2000	208	9	20	SINGLE
CF2002	727.00	CF2002T	790.00	CF2002C	CF2002C24	924.00	2000/1500	240/208	9	20	SINGLE
CF2003	1041.00	CF2003T	1104.00	CF2003C	CF2003C24	1238.00	2000	347	9	20	SINGLE
---	---	CF2006T	1157.00	CF2006C	CF2006C24	1292.00	2000	600	10	22	SINGLE
CF3008	746.00	CF3008T	808.00	CF3008C	CF3008C24	944.00	3000	208	9	20	SINGLE
CF3002	746.00	CF3002T	808.00	CF3002C	CF3002C24	944.00	3000/2250	240/208	9	20	SINGLE
CF3003	1060.00	CF3003T	1123.00	CF3003C	CF3003C24	1255.00	3000	347	9	20	SINGLE
---	---	CF3006T	1175.00	CF3006C	CF3006C24	1309.00	3000	600	10	22	SINGLE
CF4008	800.00	CF4008T	862.00	CF4008C	CF4008C24	996.00	4000	208	9	20	SINGLE
CF4002	800.00	CF4002T	862.00	CF4002C	CF4002C24	996.00	4000/3000	240/208	9	20	SINGLE
CF4003	1112.00	CF4003T	1175.00	CF4003C	CF4003C24	1309.00	4000	347	9	20	SINGLE
---	---	CF4006T	1228.00	CF4006C	CF4006C24	1364.00	4000	600	10	22	SINGLE
---	---	CF6008CT	1991.00	CF6008C	CF6008C24	1928.00	6000	208	18	40	DOUBLE
---	---	CF6002T	1792.00	CF6002C	CF6002C24	1928.00	6000/4500	240/208	18	40	DOUBLE
---	---	CF6003T	2328.00	CF6003C	CF6003C24	2462.00	6000	347	18	40	DOUBLE
---	---	CF6006T	2328.00	CF6006C	CF6006C24	2462.00	6000	600	20	44	DOUBLE
---	---	CF8008CT	2114.00	CF8008C	CF8008C24	2052.00	8000	208	18	40	DOUBLE
---	---	CF8002CT	2114.00	CF8002C	CF8002C24	2052.00	8000/6000	240/208	18	40	DOUBLE
---	---	CF8003CT	2856.00	CF8003C	CF8003C24	2796.00	8000	347	18	40	DOUBLE
---	---	CF8006CT	2856.00	CF8006C	CF8006C24	2796.00	8000	600	20	44	DOUBLE

Add W for white or SW for soft white (consult the optional colours chart or contact your Stelpro representative for all other colours).

Models also available in 277 V and 480 V.

--- not available

ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
WFT1	built-in single pole thermostat [120 V-600 V] (standard or tamper-proof)	65.00
WFT2	built-in double pole thermostat [120 V-600 V] (standard or tamper-proof)	82.00
WFS A1*	surface adapter (single unit)	86.00
WFS A2*	surface adapter (double unit)	175.00
WFDIS-30*	disconnect switch kit 600 V/30 A, 2 poles	171.00
WFDIS-40*	disconnect switch kit 600 V/40 A, 2 poles/3 poles	201.00
WFDIS-60*	disconnect switch kit 600 V/60 A, 2 poles/3 poles	242.00
CFTBA1*	T-Bar adapter (single unit)	97.00
CFTBA2*	T-Bar adapter (double unit)	175.00
WFC24RX*	relay kit without transformer 24 V	175.00

* Add W for white or SW for soft white.


* Factory installation

THROW DISTANCE AND HEAT RISE

UNITS	THROW DISTANCE		HEAT RISE	
KW	M	FT	°C	°F
1.5	4.1	13'7"	30	53
2	4.1	13'7"	42	75
3	4.1	13'7"	61	110
4	4.1	13'7"	74	133
6	4.1	13'7"	61	110
8	4.1	13'7"	74	133
9	4.1	13'7"	61	110
12	4.1	13'7"	74	133

TECHNICAL DRAWINGS

SINGLE UNIT

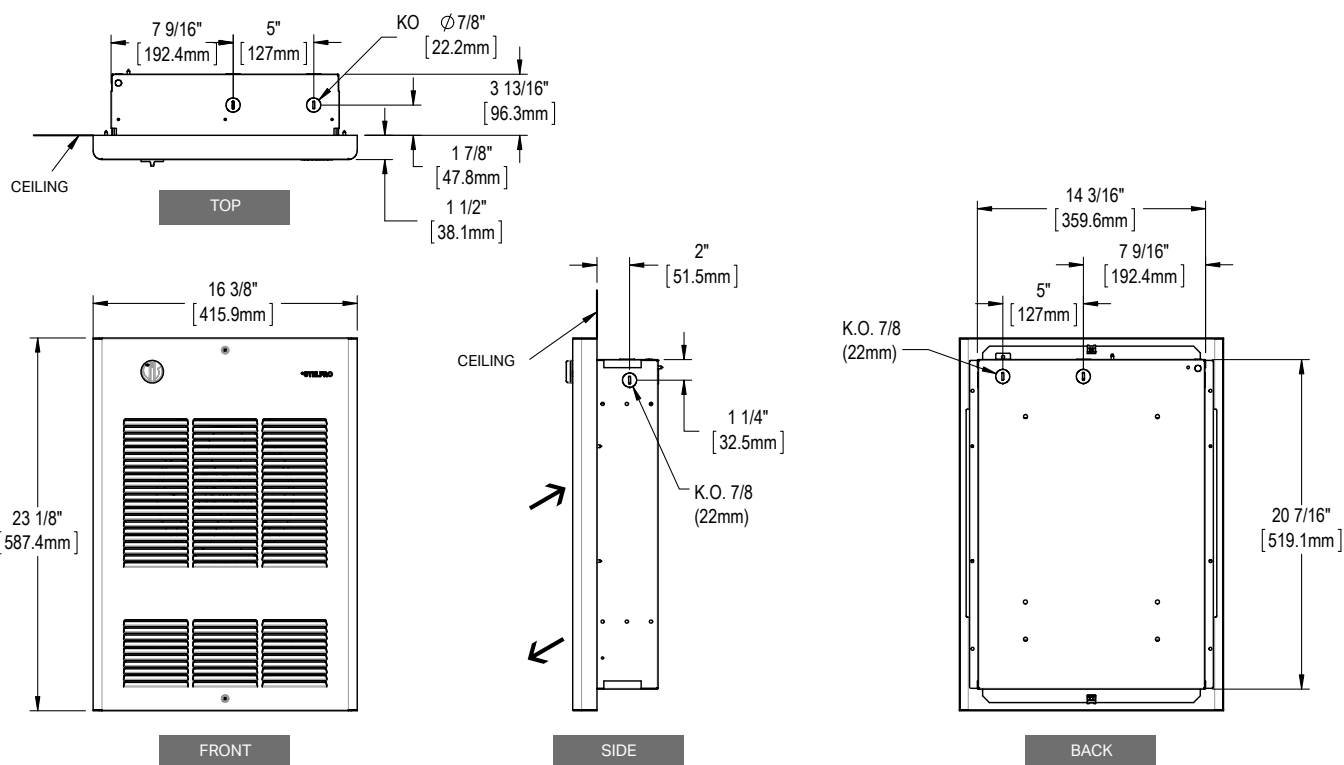

DOUBLE UNIT

