



AS-Interface distributor compact for AS-i profile cable IP 67/68/69K, max. 8 A

General technical data		
Type of device		AS-Interface accessories
Function		distribution function for AS-i flat cables
operating voltage according to AS-Interface specification	V	26.5 ... 31.6
operational current rated value	A	8
Note		cable must not end in the feeder
Connections/ Terminals		
type of electrical connection		insulation piercing method for AS-Interface flat cable
Mechanical data		
Type of mounting		screw fixing
tightening torque of fixing screw	N·m	1.65 ... 1.65
Contacts Load rating max	A	12
Ambient conditions		
ambient temperature	°C	-25 ... +75
ambient temperature during storage	°C	-25 ... +85
degree of protection		IP67/68/69K
Certificates/ approvals		
General Product Approval		EMV Marine / Shipping



EG-Konf.

[Confirmation](#)



UL




RCM



PRS

other	Environment
Confirmation	Environmental Con- firmations

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1901-2NN10 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1901-2NN10 Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RK1901-2NN10

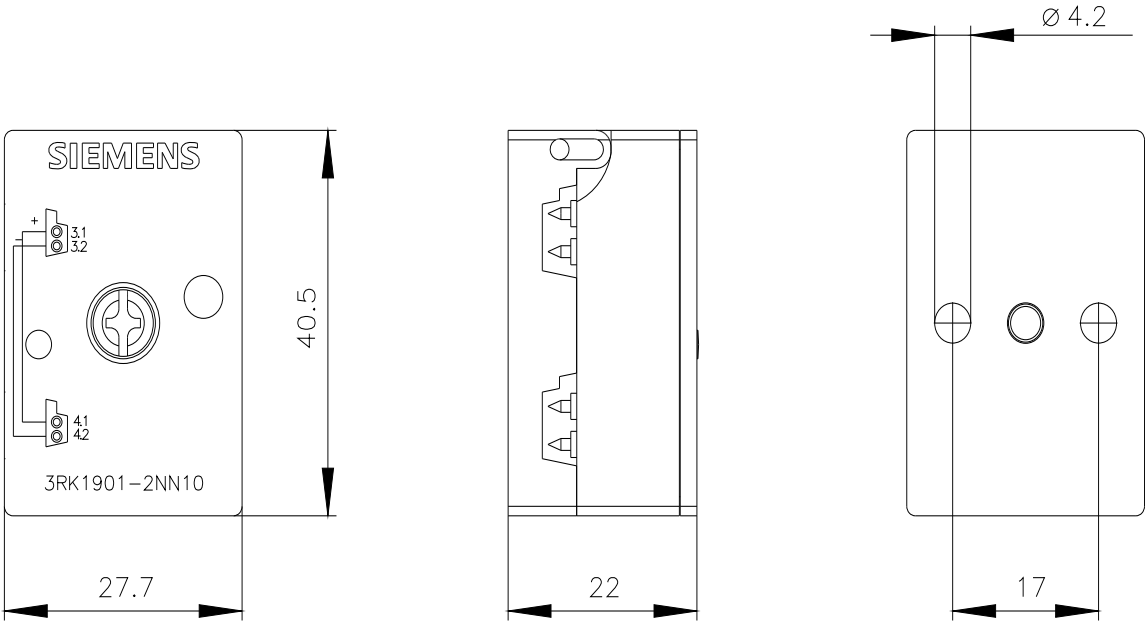

last modified:

12/23/2020 