


## 30 Amp, 125, 250 Volts and 277 Volts AC 2 Pole, 3 Wire, Grounding



**30A 125V**  
NEMA L5-30P  
2 HP

**30A 250V**  
NEMA L6-30P  
2 HP

**30A 277V AC**  
NEMA L7-30P  
3 HP

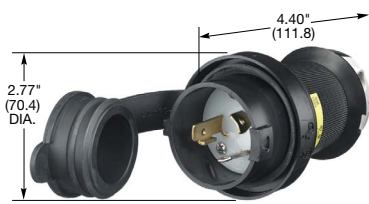

**HBL2611SW**




**HBL2621S**




**HBL2621**



**HBL2611ST**



**HBL2615SW**



**HBL2625**

### Plugs

#### Watertight Safety-Shroud®

IP66 SUITABILITY

UL Type 4x, 12

Description	Cord Dia.	Catalog Number		
Black Valox® housing, white Valox® clamps.	.325"-.930" (9-24)	<b>HBL2611SW</b>	<b>HBL2621SW</b>	-

#### Safety-Shroud®

IP20 SUITABILITY

Description	Cord Dia.	Catalog Number		
Black and white nylon body, white Valox® shroud. Can be used with the Insulgrip Connector Bodies.	.360"-.930" (9-24)	<b>HBL2611S</b>	<b>HBL2621S</b>	-

Note: See page B-40 for accessories.

#### Insulgrip®

IP20 SUITABILITY

Description	Cord Dia.	Catalog Number			
Black and white nylon.	.360"-.930" (9-24)	<b>HBL2611</b>	<b>HBL2621</b>	<b>HBL2631</b>	
Black and white nylon, spring termination		<b>HBL2611ST</b>	<b>HBL2621ST</b>		-
Heat stabilized, gray nylon, 220° F (104° C).	.360"-.930" (9-24)	<b>HBL2611F</b>	<b>HBL2621F</b>		-
Corrosion resistant, yellow nylon.	.360"-.930" (9-24)	<b>HBL26CM11</b>	<b>HBL26CM21</b>		-
All black nylon.	.360"-.930" (9-24)	<b>HBL2611BK</b>	<b>HBL2621BK</b>		-
Cord clamps with removable inserts. All black nylon.	.360"-.930" (9-24)	-	<b>HBL2621EBK</b>		-

Note: See page B-52 for accessories.

#### Valise®

IP20 SUITABILITY

Description	Cord Dia.	Catalog Number		
Yellow nylon.	.590"-.930" (15.0-23.6)	<b>HBL2611VY</b>	<b>HBL2621VY</b>	-
Corrosion resistant, yellow nylon.	.590"-.930" (15.0-23.6)	<b>HBL26CM11V</b>	-	-
Black nylon.	.590"-.930" (15.0-23.6)	<b>HBL2611VBK</b>	<b>HBL2621VBK</b>	-

Note: See page B-53 for accessories.

### Flanged Inlets

#### Watertight Safety-Shroud®

IP66 SUITABILITY

UL Type 4x, 12

Description	Catalog Number		
Gray Valox® housing and flange.	<b>HBL2615SW</b>	<b>HBL2625SW</b>	-
Reverse service, gray Valox® housing and flange (use with HBL2613SR), (Not shown).	<b>HBL2615SWR</b>	-	-

Note: See page B-54 for accessories.

#### Insulgrip®

IP20 SUITABILITY

Description	Catalog Number			
Nylon casing, back wired.	<b>HBL2615</b>	<b>HBL2625</b>	<b>HBL2635</b>	
Nylon casing, spring termination	<b>HBL2615ST</b>	<b>HBL2625ST</b>		-
Heat stabilized, gray nylon, 220° F (104° C).	<b>HBL2615F</b>	<b>HBL2625F</b>		-
Nylon casing, weather protective, die cast aluminum, back wired, self closing lift cover.	<b>HBL2615M3</b>	-		-

Note: See page B-52 for accessories.

See pages B-69 and B-70 for technical information on Twist-Lock and Watertight Safety-Shroud devices.

See page B-74 for technical information on Valise plugs and connectors.

Valox® is a trademark of SABIC Innovative Plastics, acquired from General Electric Company.

Dimensions in Inches (mm)