

## ORDERING INFORMATION

**Order code:** 69320  
**Description:** F17T8/41K/8/RS/G13/STD ESV S2  
**UPC:** 069549026308  
**Case quantity:** 25

## PERFORMANCE DATA


**Shape:** T8  
**Base:** G13 (Med Bipin)  
**Starting method:** Program Start (PS)  
**Wattage (W):** 17  
**Colour temperature (K):** 4 100  
**CRI:** 85  
**Rated life on PS/PRS<sup>1</sup> ballast:**  
     Based on a 3 hour start 30 000  
     Based on a 12 hour start 35 000  
**Initial lumens (lm):** 1 400  
**Mean lumens (lm):** 1 330  
**Nominal efficiency (lm/W):** 82  
**TCLP compliant:** Yes  
**Phosphor composition:** Triphosphor  
**Nominal lamp operating frequency (Hz):** 60  
<sup>2</sup> Minimum starting temperature (°C): -10




Nominal length : 24 in. (610 mm)  
 Dia. : 1 in. (26 mm)

<sup>1</sup> The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.  
<sup>2</sup> The minimum starting temperature is a function of the ballast.

## DIMENSIONS

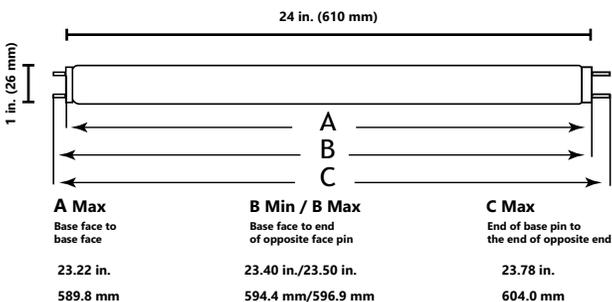

## SPECTRAL DISTRIBUTION

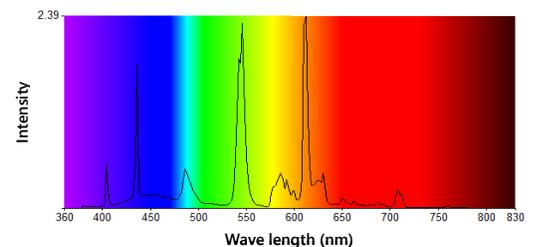

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.