


NMD90 Cable 300V

PVC or XLPE/PVC

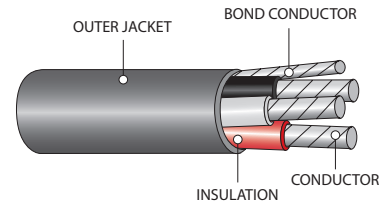

SPECIFICATIONS

- CSA FT1
- CSA C22.2 No. 48

*Refer to CE Code for details



CONSTRUCTION

- Conductor:** Bare ACM aluminum compact or compressed Class B strand
- Insulation:** Cross-Linked Polyethylene (XLPE) Type RW90 or Polyvinyl Chloride (PVC)
- Ground (Bonding) Conductor:** Bare ACM aluminum compact or compressed Class B strand
- Outer Jacket:** Sunlight and moisture resistant Polyvinyl Chloride (PVC)
- Options:** Other coloured outer jacket and copper conductor available upon request

NMD90 - AL

3 CONDUCTOR

| Part Number | No. of Conductors | AWG Size | | Insulation Thickness | | Approximate Diameter | | Net Weight | |
|--------------|-------------------|----------|-----------|----------------------|-------|----------------------|--------|------------|-------|
| | | Cond. | Bond Wire | in. | mm. | in. | mm. | LB/MFT | KG/KM |
| 28005-07-090 | 3 | 6 | 8 | 0.045 | 1.140 | 0.666 | 16.920 | 277 | 412 |
| 28005-08-000 | 3 | 4 | 6 | 0.045 | 1.140 | 0.812 | 20.620 | 417 | 621 |
| 28005-10-000 | 3 | 2 | 6 | 0.045 | 1.140 | 0.952 | 24.180 | 608 | 905 |

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
Specifications are subject to change without prior notice.

Refer to CEC for Ampacity