

Can be attached with a vacuum cleaner.



Powered by two 18V Li-ion batteries in series



Variable speed control by dial



On-tool storage for hex wrench



Battery capacity warning lamp

Guide Rule (Sub Base) (option)

Guide Rule can be used as Sub Base by turning up side down.

### Accessories

T.C.T Saw Blade




- Reduces the stress of cutting
- Tip's shape of New type

No. of Teeth	Plate (mm)	Kerf (mm)	Rake (degree)	WOOD	MDF	Laminate	ALUMINUM	CORIAN	Part No.
56	1.0	1.45	23°						<b>EFFICUT</b> B-57364
55	1.1	1.6	20°						B-57069
28	1.4	2.0	15°						B-56649
28	1.6	2.2	15°						B-07434
48	1.25	1.85	8°						B-56166
48	1.6	2.2	8°						B-07353
60	1.4	2.0	5°						B-56661
60	1.4	2.0	5°						B-56677
56	1.4	2.0	-3°						B-56655
56	1.7	2.4	-3°						B-07440
48	1.4	2.0	5°						B-56683
48	1.7	2.4	5°						B-10344

### Guide Rail

Length	Part No.
1,400mm	194368-5
1,900mm	194925-9
3,000mm	194367-7

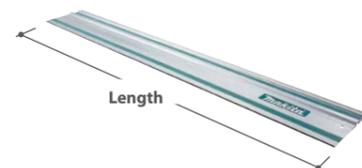

### Bevel Guide Set

Adjustable angle of Guide Rail  
Part No. 196664-7



### Guide Rule (Sub Base)

Part No. 165447-6



### Clamp Set

(use with Guide rail)  
Part No. 194385-5



### Dust bag

Part No. 126599-8



### 6-1/2" Cordless Plunge Cut Circular Saw DSP600

Variable Speed	<b>Battery Capacities</b>	Two 18V Li-Ion
Brake	<b>Blade Diameter</b>	6-1/2" (165 mm)
Soft Start	<b>Arbor</b>	13/16" (20 mm)
Dust Collection	<b>Max. Cutting Depth:</b>	0°: 2-3/16" (56 mm)
Carrying Case		45°: 1-9/16" (40 mm)
		50°: 1-1/2" (38 mm)
	<b>No Load Speed</b>	2,500 - 6,300 RPM
	<b>Overall Length</b>	13-5/8" (346 mm)

**Standard Equipment:** Tool Only. Batteries and Charger sold separately. 6-1/2" C.T. Blade 50T (B-57071), Hex Wrench 5 (783203-8), Interlocking Tool Case (197213-3)



6-1/2" Cordless Plunge Cut Circular Saw DSP600

Satisfy Professional's Needs



Up to **40%** Faster Cutting than current corded model

Two 18V LXT Li-Ion batteries deliver power and performance!

When QUALITY & SERVICE COUNTS – Choose Makita

makita.ca

# As powerful as AC model thanks to BL motor



## High power for fast cutting and ripping

- 18Vx2 Li-ion battery
- Brushless DC motor
- New thin saw blade




## ADT


### Automatic torque Drive Technology

automatically changes the cutting speed according to load conditions for an optimum operation:

- On light duty: high-speed rotation mode
- On heavy duty: high torque mode

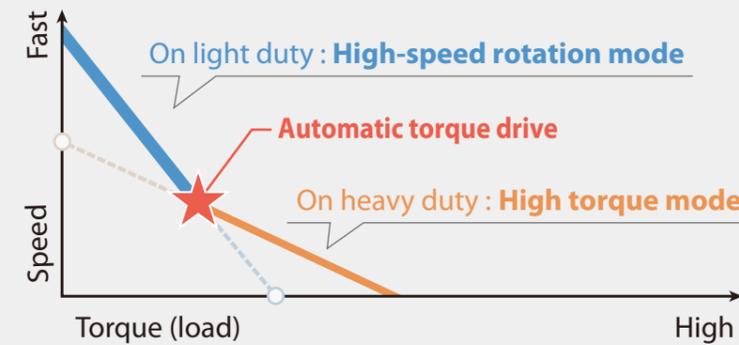

## High Maneuverability

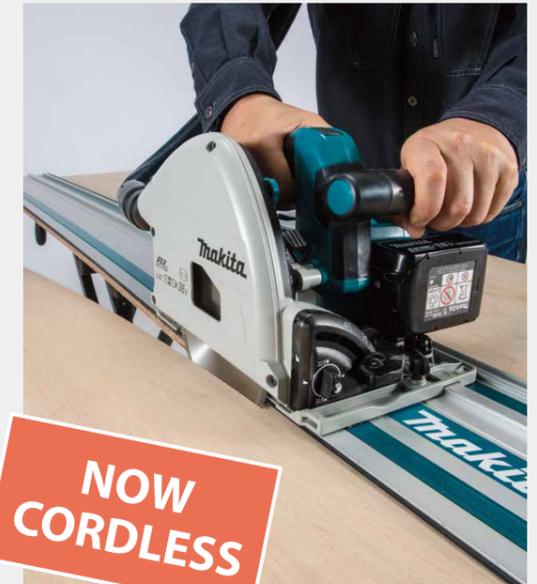


### Tip-Resistant Design



Sliding the lever prevents this tool from falling down towards blade case.

### Bevel Cut

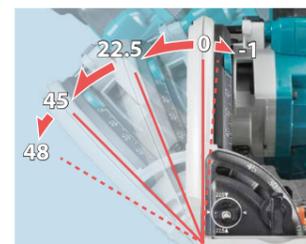

**Bevel Range**  
:: -1 to 48 degrees

### Precision Bevel Cut

The position of cutting line is always the same regardless of bevel angle in cutting with Guide Rail attached.

### Positive Stopper



### Depth Stopper for Splinter-free Cutting

Enables to easily cut a preliminary groove at a depth of 1/16" (2 mm) for splinter-free cuts.



### Close-to-Wall Cutting



Only 11/16" (18 mm) away from wall at minimum

### Soft start

minimizes start-up shock, and makes the tool start smoothly.

### Electric brake

enables you to start next operation quickly.

