


Eaton C25FNF375T

Catalog Number: C25FNF375T

Eaton definite purpose contactor, Quick, 75A, 24 Vac, 50/60 Hz, Open with metal mounting plate, 15-50A, two- and three-pole, Contactor, Three-pole, 90A, Box lugs (posidrive setscrew) and quick connect terminals (side-by-side), Non-reversing

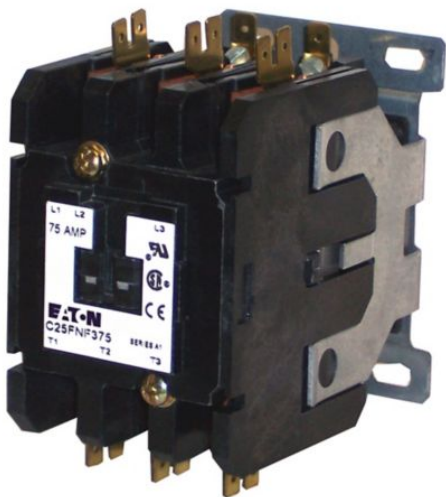

General specifications

Product Name	Catalog Number
Eaton definite purpose contactor	C25FNF375T
UPC	Product Length/Depth
782114117477	3.97 in
Product Height	Product Width
3.75 in	2.63 in
Product Weight	Warranty
2.66 lb	1 year
Compliances	Certifications
RoHS Compliant	UL Recognized CSA Certified
Catalog Notes	
Resistive Load rating per pole	

defaultTaxonomyAttributeLabel

Amperage Rating

75A

Number Of Poles

Three-pole

Type

Non-reversing

Coil

24 Vac, 50/60 Hz

Enclosure

Open with metal mounting plate

Frame size

15-50 A, two-pole and three-pole

Inductive full load

75 A

Model

Contactor

Resistive load

90 A

Terminals

Box lugs (posidrive setscrew) and quick connect terminals (side-by-side)

Connection

Quick

Resources

Catalogs

Eaton's Volume 5—Motor Control and Protection

Drawings

C25FNF3 2D PDF

C25FNF3 AutoCAD 2D Footprint (mm)

C25FNF3 3D Inventor

C25FNF3 3D Model Xchange

C25FNF3 AutoCAD 2D Footprint

Specifications and datasheets

Eaton Specification Sheet - C25FNF375T