

LUNA™




Gelngowan - Private Residence



For more information please visit Liteline.com/LUNA



3.5" LUNA install in OnePiece Developments new office headquarters
Markham, ON, Canada

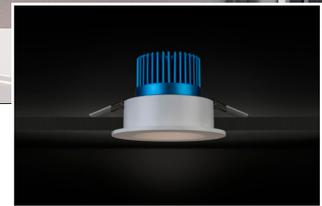


LUNA™

Sitting proudly between a premium integrated LED luminaire and a budget retrofit, the LUNA Series offers the housing, trim, and lamp look without the overhead and heat! That's right - We killed the can! Available in round, square, tilting and fixed options, LUNA offers space uniformity to best suit your building's or project's needs.

The **LUNA Designer Series** offers a sleek, directional, and quiet alternative to further elevate your space. Contractors, builders, homeowners, and designers alike now have a LUNA regressed option for a more seamless design that offers a selectable CCT switch for on-site flexibility.


	2"	3"	3.5"	4"	LUNA 56 Fits into 5" & 6" cut hole
LUNA™	X	Up to 625 lm 	Up to 950 lm 	Up to 1060 lm 	Up to 1500 lm 
LUNA™ DESIGNER SERIES	Up to 560 lm 	X	Up to 680 lm 	Up to 850 lm 	X



TRIM COLORS*




LUNA 56 REFLECTOR COLORS

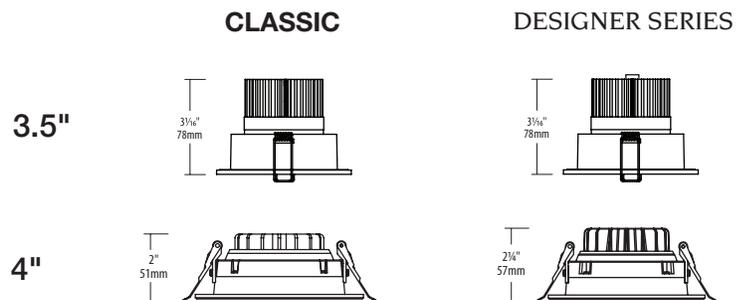

*See ordering guide for full list of colors available for each model

LUNA™ MULTIPLES

To further enhance the industry's leading regressed gimbal, the LUNA 3.5" fixture is **WET location rated**, available in multiples of 2 or 3, and in a variety of different trim colors.



BRUSHED BRONZE (BB)*



BLACK (BK)



OIL RUBBED BRONZE (OB)*



WHITE (WH)



SILVER (SL)*



BRUSHED NICKEL (BN)

*BB, OB and SL are custom orders and require a minimum of 360 units.


FEATURES:

- IC Rated
- Suitable for air handling spaces
- WET location rated
- Energy Star
- JA8-2016, TITLE 24
- Lifetime warranty
- DIM TO WARM options
- 90+ CRI
- Commercial driver option available
- Dimmable
- No housing required

ACCESSORIES



NEW CONSTRUCTION MOUNTING KIT (A+B)
PRE-MOUNTING PLATE (A)
HANGER BARS (B)



BUTTERFLY BRACKETS (C)
PRE-MOUNTING PLATE (A)



60" FLEXIBLE CONNECTOR
TO EXTEND THE DISTANCE
BETWEEN THE FIXTURE
AND DRIVER



VAPOR BARRIER



GOOF RING
PAIR WITH 3.5" OR 4"
LUNA TO FIT INTO 5"
OR 6" CUT HOLE



COMMERCIAL GRADE DRIVER
120-347V / 120-277V,
0-10V DIMMING

	SIZE	WATTS	COLOR TEMP.	DRIVER OPTIONS	CRI	TRIM FINISH
3" GIMBAL	ROUND: RA3	- 7G -	<input type="text"/>	- <input type="text"/> 120V DRIVER ONLY	- 90	<input type="text"/>
	SQUARE: RA3S	- 7G -	<input type="text"/>	- <input type="text"/> 120V DRIVER ONLY	- 90	<input type="text"/>
3.5" FIXED	FIXED ROUND: RA35	- 12F -	<input type="text"/>	- <input type="text"/>	- 90	<input type="text"/>
	FIXED SQUARE: RA35S	- 12F -	<input type="text"/>	- <input type="text"/>	- 90	<input type="text"/>
3.5" GIMBAL	SMOOTH REGRESSED ROUND: RA35	- 12G -	<input type="text"/>	- <input type="text"/>	- 90	<input type="text"/>
	SMOOTH REGRESSED SQUARE: RA35S	- 12G -	<input type="text"/>	- <input type="text"/>	- 90	<input type="text"/>
4" GIMBAL	ROUND: RA4	- 12G -	<input type="text"/>	- <input type="text"/>	- 90	<input type="text"/>
	SQUARE: RA4S	- 12G -	<input type="text"/>	- <input type="text"/>	- 90	<input type="text"/>

27K : 2700 K
 30K : 3000 K
 35K : 3500 K
 40K : 4000 K
 50K : 5000 K
 DTW : DIM TO WARM

Leave blank for standard 120V driver
 E : Lutron Hi-Lume® 1% (EcoSystem®)*
 EM : Emergency Backup, 120~277V, 0-10V*
 C : 120~347V / 120~277V, 0-10V*

WH: WHITE
 BK : BLACK
 BN : B.NICKEL
 SL: SILVER

*Not available for 3" Gimbal

	SIZE	WATTS	COLOR TEMP.	CRI	TRIM FINISH	REFLECTOR
LUNA 56 Fits into a 5" & 6" cut hole	ROUND: RA56	- <input type="text"/> - <input type="text"/>	- 90	<input type="text"/>	<input type="text"/>	
	17F 20F*		Leave blank for CCT Select - 5 position (27-50K) DTW : DIM TO WARM		WH: WHITE BK : BLACK BN : B.NICKEL	WH: WHITE BK : BLACK GL : GOLD GR : GREEN RG : ROSE GOLD SP : SPECULAR SS : SEMI-SPECULAR

*20W commercial driver 120~347V / 120~277V, 0-10V dimming

	SIZE	WATTS	COLOR TEMP.	DRIVER OPTIONS	CRI	TRIM FINISH
3.5" MULTIPLES	MULTIPLES: <input type="text"/>	- 9G -	<input type="text"/>	- <input type="text"/>	- 90	<input type="text"/>
	RA35M-2L : 2 Lights RA35M-3L : 3 Lights		Leave blank for CCT Select - 5 position (27-50K) DTW : DIM TO WARM	Leave blank for standard 120V driver E : Lutron Hi-Lume® 1% (EcoSystem®) EM : Emergency Backup, 120~277V, 0-10V C : 120~347V / 120~277V, 0-10V		WH: WHITE BK : BLACK BN : B.NICKEL *BB: B.BRONZE *OB : OR.BRONZE *SL : SILVER

LUNA™ DESIGNER SERIES

	SIZE	WATTS	COLOR TEMP.	DRIVER OPTIONS	CRI	TRIM FINISH
2" FIXED	ROUND: RA2	- 7F -	<input type="text"/>	- 90	<input type="text"/>	
	SQUARE: RA2S	- 7F -	<input type="text"/>	- 90	<input type="text"/>	
			Leave blank for CCT Select - 5 position (27-50K) DTW : DIM TO WARM		WH: WHITE BK : BLACK BN : B.NICKEL *BB: B.BRONZE *OB : OR.BRONZE *AL : ALUMINIUM	
3.5" GIMBAL	SHARP REGRESSED ROUND: RA35	- 12RG -	<input type="text"/>	- <input type="text"/>	- 90	<input type="text"/>
	SHARP REGRESSED SQUARE: RA35S	- 12RG -	<input type="text"/>	- <input type="text"/>	- 90	<input type="text"/>
4" GIMBAL	REGRESSED ROUND: RA4	- 12RG -	<input type="text"/>	- <input type="text"/>	- 90	<input type="text"/>
	REGRESSED SQUARE: RA4S	- 12RG -	<input type="text"/>	- <input type="text"/>	- 90	<input type="text"/>
			Leave blank for CCT Select - 5 position (27-50K) DTW : DIM TO WARM	Leave blank for standard 120V driver E : Lutron Hi-Lume® 1% (EcoSystem®) EM : Emergency Backup, 120~277V, 0-10V C : 120~347V / 120~277V, 0-10V		WH: WHITE BK : BLACK BN : B.NICKEL *BB: B.BRONZE *OB : OR.BRONZE *AL : ALUMINIUM

*BB, OB and SL are custom orders and require a minimum of 360 units

QuickShip options are available on orders of 100 pieces or less, and will ship within 2 business days of an order being received. NOTE: QuickShip is only available with standard 120V driver option. Due to our continued efforts to improve our products, product specifications are subject to change without notice. Refer to liteline.com for up to date specifications.

