





Pole Top Hardware



POLE TOP PINS, ANGLE PINS, ETC.

Pole Top Pins

Cat.No.	L	L1	Extra Hole B	D	T	Max load lbs. (10° deflection)	Bottom Slot	Std.Pkg.	Wt.-lbs./ C
Pole Top Pin:									
181PT	18	8	-	11/16	1	1,000	13/16	10	370
241PT	24	8	11/16	11/16	1	750	13/16	10	540
243PT	24	8	11/16	11/16	1-3/8	750	13/16	10	610
2415PT	24	8	11/16	11/16	1	750	13/16	10	610
2415PT30K	24	8	11/16	13/16	1	750	11/16	10	610
2415PT11	24	8	9/16	11/16	1	750	11/16	10	610

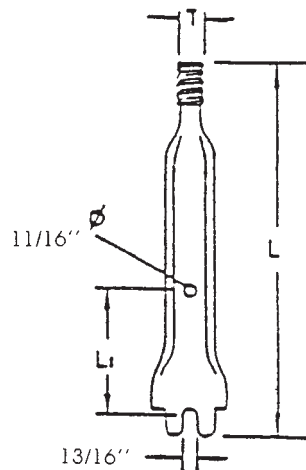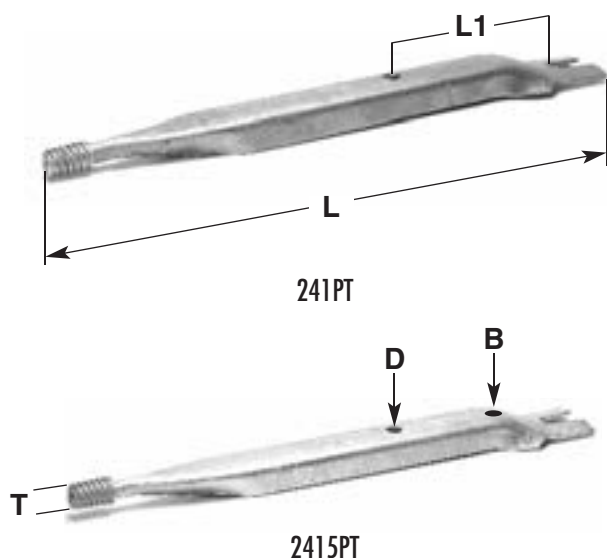

Cat.No.	L	L1	D	T	(10° deflection)	Max load lbs. Std.Pkg.	Wt.-lbs./ C
Angle Pole Top Pin: (Nylon thread available upon request.)							
64AT	6	8	11/16	1	2,500	4	1400
7114AT	7	8	11/16	1-3/8	2,500	4	1400
434AT	4	8	11/16	1	2,500	4	1140
34114AT	Base only	8	11/16			4	900

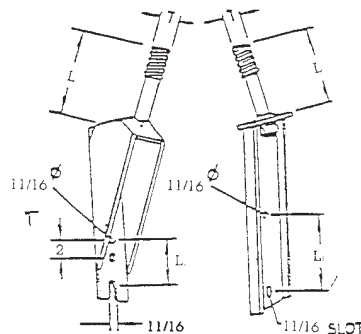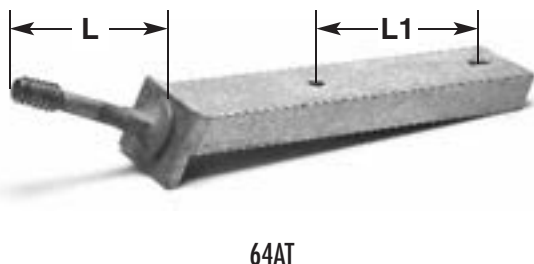



Pole Top Hardware

POLE TOP BRACKETS, SIDE POST BRACKETS


Pole Top Bracket

1544PTB – Hot dip galvanized Steel for use with line post insulators with stud base rated 13.2 KV to 69 KV. Mounting holes for 5/8" bolts - 8" from bottom.


1568PTB – has 13/16" bottom mounting slot, mounting holes 6" & 8"

Cat.No.	Minimum Rated Strength	L	H1	H2	Slot	L2	L1
1544PTB	2500 lbs.	15	13/16	11/16	11/16	5-1/4	5-1/4
1568PTB	2500 lbs.	15	7/8	11/16	13/16	5-1/4	5-1/4
1568PTA	2500 lbs.	15	13/16	11/16	13/16	5-1/4	5-1/4
1568PAO	2500 lbs.	15	13/16	13/16	13/16	5-1/4	5-1/4
1544PTB-78ME		15	15/16	13/16	13/16	5-1/4	4-1/2
1568PTO-15	2500 lbs.	15	15/16	13/16	13/16	6	6
1544PTB13	2500 lbs.	15	13/16	11/16	13/16	5-1/4	5-1/4
1568PTO	2500 lbs.	15	7/8	13/16	13/16	5-1/4	5-1/4
4144PTB		41	7/8	11/16	11/16	5-1/4	5-1/4

Other sizes available upon request.

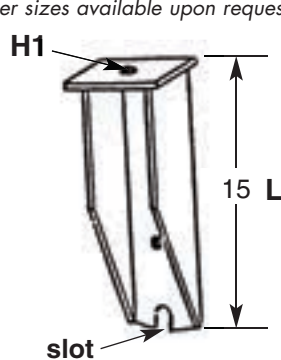

1544PTB & 1568PTB



1544PTA



1544PTB



1544PTA

Side Post Bracket

Cat.No.	Minimum Rated Strength	Std.Pkg.	Wt.-lbs./ C
3SBS	2800 lbs.	5	750
9SBS	2800 lbs.	5	1130
9SBP	c/w Plate	5	1400
175SBSO	-	5	1800
175SBP	c/w Plate flush	5	2100
175SBP-1	c/w Plate offset	5	2100



175SBSO



175SBP-1
9SBP



9SBS
3SBS