



Classic filament LEDbulbs

8A19/LED/930/FR/Glass/E26/DIM 1FB T20

Philips LED vintage-style lamps allow you to maintain a warm, classic light effect while providing longer life and energy savings.

Product data


| General Information | | Lamp Current (Nom) | 85 mA |
|---------------------------------------|-----------------------------------|----------------------------|----------------------------|
| Cap-Base | E26 [Single Contact Medium Screw] | Wattage Equivalent | 60 W |
| Nominal lifetime | 15,000 hour(s) | Starting Time (Nom) | 0.5 s |
| Switching Cycle | 20,000 | Warm-up time to 60% light | 0.5 s |
| Lighting Technology | LED | Power Factor (Fraction) | 0.7 |
| EU RoHS compliant | Yes | Voltage (Nom) | 120 V |
| Light Technical | | Temperature | |
| Color Code | 930 [CCT of 3000K] | Ambient temperature range | -20 °C to 45 °C |
| Beam Angle (Nom) | 320 degree(s) | | |
| Luminous Flux | 800 lm | | |
| Color Designation | White (WH) | Controls and Dimming | |
| Correlated Color Temperature (Nom) | 3000 K | Dimmable | Only with specific dimmers |
| Luminous Efficacy (rated) (Nom) | 100.00 lm/W | Mechanical and Housing | |
| Color Consistency | <4 | Bulb Finish | Frosted |
| Color rendering index (CRI) | 90 | Bulb Material | Glass |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % | Bulb Shape | A19 |
| | | UL Wet/ damp/ dry location | Wet location |
| Operating and Electrical | | Approval and Application | |
| Line Frequency | 60 Hz | Energy Certifications | Energy Star |
| Input Frequency | 60 Hz | | |
| Power Consumption | 8 W | | |

Classic filament LEDbulbs

| | |
|-------------------------------------|---------------------------------------|
| T20 compliant | Yes |
| Application Conditions | |
| can it be used in closed luminaires | Yes |
| Product Data | |
| Order product name | 8A19/LED/930/FR/Glass/E26/DIM 1FB T20 |
| Full product name | 8A19/LED/930/FR/Glass/E26/DIM 1FB T20 |



| | |
|---------------------------------|----------------|
| Order code | 578575 |
| Material Nr. (12NC) | 929003497704 |
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 046677578572 |
| Numerator - Packs per outer box | 10 |
| EAN/UPC - Case | 50046677578577 |

Dimensional drawing




| Product | D | C |
|---------------------------------------|-------|--------|
| 8A19/LED/930/FR/Glass/E26/DIM 1FB T20 | 60 mm | 105 mm |

Photometric data

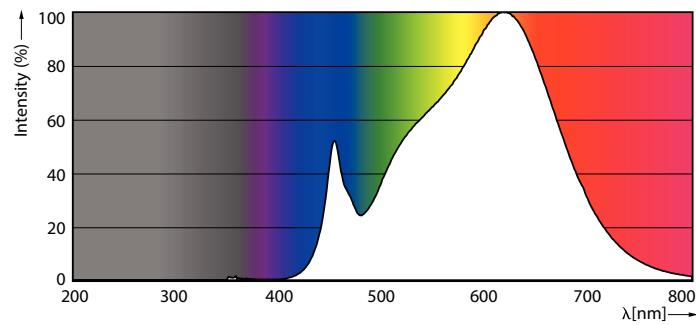

Spectral Power Distribution Colour - 8A19/LED/930/FR/Glass/E26/DIM 1FB T20



Light Distribution Diagram - 8A19/LED/930/FR/Glass/E26/DIM 1FB T20



General uniform lighting - 8A19/LED/930/FR/Glass/E26/DIM 1FB T20

Classic filament LEDbulbs

Lifetime

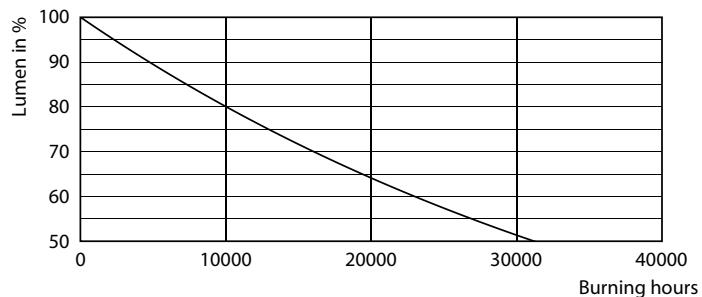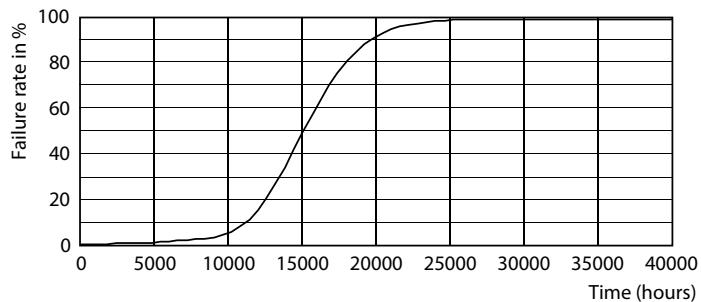

Life Expectancy Diagram - 8A19/LED/930/FR/Glass/E26/DIM 1FB T20

Lumen Maintenance Diagram - 8A19/LED/930/FR/Glass/E26/DIM 1FB T20

