



LED High Bay

With STANDARD's high bay line, it is now easy to modernize your commercial or industrial applications; it is the perfect alternative for your traditional lighting system.

Our high efficacy LED high bay luminaires provide premium performance, quality and versatility. With up to 60% lower power consumption compared to traditional fluorescent and HID light sources, these luminaires are designed to reduce your total cost of ownership, while providing modern uniform light. These luminaires are ideal for high ceilings (10' to 60') in warehouses, manufacturing facilities, gymnasiums, grocery stores or any other large indoor space, and they provide direct and semi-direct light.

LED Bell Shape

STANDARD's LED high bay bell shape luminaires are the perfect solution for either new or retrofit applications. Built using cold-forging technology, the heat sink is made of 1070 pure aluminum. This forging process allows for heat dissipation that is three times faster than die-casting, ensuring the longest life possible for these fixtures. This series of LED fixtures have a frosted polycarbonate lens that provides an even light distribution and significantly reduces glare, a perfect solution for lower ceiling applications. The hook design and the 10-foot cable facilitate an easy and fast installation.

- 1070 pure aluminum heat sink for maximum heat dissipation
- Frosted polycarbonate lens to eliminate glare
- 10-foot cable to easy installation
- A variety of colour temperatures and reflector options available
- Offering an extended warranty of 10 years is a testament to the product quality



A



B



C



D




E




F

Order code	Description	Watts (W)	Volts (VCA)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 (hrs)	Finish	Figure	Case qty (master)
67111	HBB/S4/100-277/100W/40K/FR/PRO/STD	100	100-277	4 000	13 140	80	155 000	Grey	C	1
67112 ¹	HBB/S4/100-277/100W/50K/FR/PRO/STD	100	100-277	5 000	13 583	80	155 000	Grey	C	1
67113 ¹	HBB/S4/200-480/100W/40K/FR/PRO/STD	100	200-480	4 000	13 091	80	155 000	Grey	D	1
67114 ¹	HBB/S4/200-480/100W/50K/FR/PRO/STD	100	200-480	5 000	13 496	80	155 000	Grey	D	1
67115	HBB/S4/100-277/150W/40K/FR/PRO/STD	150	100-277	4 000	19 389	80	155 000	Grey	C	1
67116	HBB/S4/100-277/150W/50K/FR/PRO/STD	150	120-277	5 000	19 913	80	155 000	Grey	C	1
65388	LPHBB/S3/150W/40K/2/DD1/FP/STD	150	120-277	4 000	19 395	80	87 000	Grey	B	1
65389	LPHBB/S3/150W/40K/3/DD1/FP/STD	150	347-480	4 000	19 395	80	87 000	Grey	B	1
65790	LPHBB/S3/150W/50K/3/DD1/STD	150	347-480	5 000	19 507	80	87 000	Black	B	1
65791	LPHBB/200W/40K/2/DD1/STD	200	120-277	4 000	26 355	80	72 000	Black	A	1
65795	LPHBB/200W/50K/2/DD1/STD	200	120-277	5 000	26 515	80	72 000	Black	A	1
65796	LPHBB/200W/40K/3/DD1/STD	200	347-480	4 000	26 355	80	72 000	Black	B	1
67122	HBB/S4/200-480/200W/50K/FR/PRO/STD	200	200-480	5 000	26 462	80	155 000	Grey	D	1
67123	HBB/S4/100-277/300W/40K/CL/BLK/PRO/STD	300	100-277	4 000	40 239	80	155 000	Black	E	1
67124	HBB/S4/100-277/300W/50K/CL/BLK/PRO/STD	300	100-277	5 000	40 239	80	155 000	Black	E	1
67125	HBB/S4/200-480/300W/40K/CL/BLK/PRO/STD	300	200-480	4 000	40 383	80	155 000	Black	E	1
67126	HBB/S4/200-480/300W/50K/CL/BLK/PRO/STD	300	200-480	5 000	40 383	80	155 000	Black	E	1
67127 ¹	HBB/S4/100-277/400W/40K/CL/BLK/PRO/STD	400	100-277	4 000	49 526	80	155 000	Black	F	1
67128 ¹	HBB/S4/100-277/400W/50K/CL/BLK/PRO/STD	400	100-277	5 000	49 526	80	155 000	Black	F	1
67129 ¹	HBB/S4/200-480/400W/40K/CL/BLK/PRO/STD	400	200-480	4 000	48 826	80	155 000	Black	F	1
67130 ¹	HBB/S4/200-480/400W/50K/CL/BLK/PRO/STD	400	200-480	5 000	48 826	80	155 000	Black	F	1
67131	HBB/S4/100-277/500W/40K/CL/BLK/PRO/STD	500	100-277	4 000	65 418	80	155 000	Black	F	1
67132	HBB/S4/100-277/500W/50K/CL/BLK/PRO/STD	500	100-277	5 000	66 198	80	155 000	Black	F	1
67133	HBB/S4/200-480/500W/40K/CL/BLK/PRO/STD	500	200-480	4 000	65 246	80	155 000	Black	F	1
67134	HBB/S4/200-480/500W/50K/CL/BLK/PRO/STD	500	200-480	5 000	66 099	80	155 000	Black	F	1

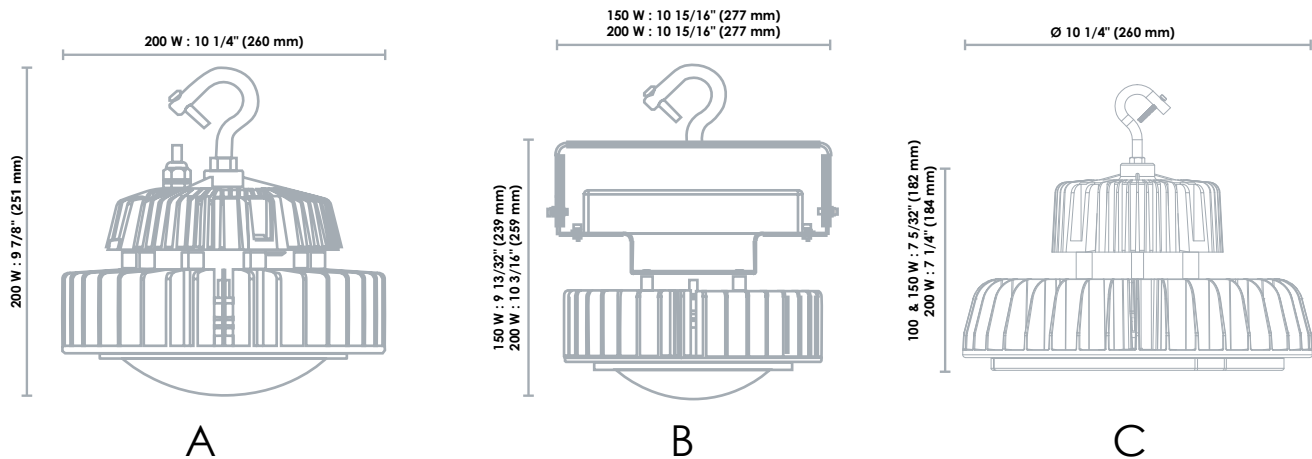

Lumen values are derived from photometric testing.
For a complete list of compatible dimmers and DLC qualified products,
please visit www.standardpro.com.
¹Non-stocked items, contact STANDARD for lead time and minimum order quantity



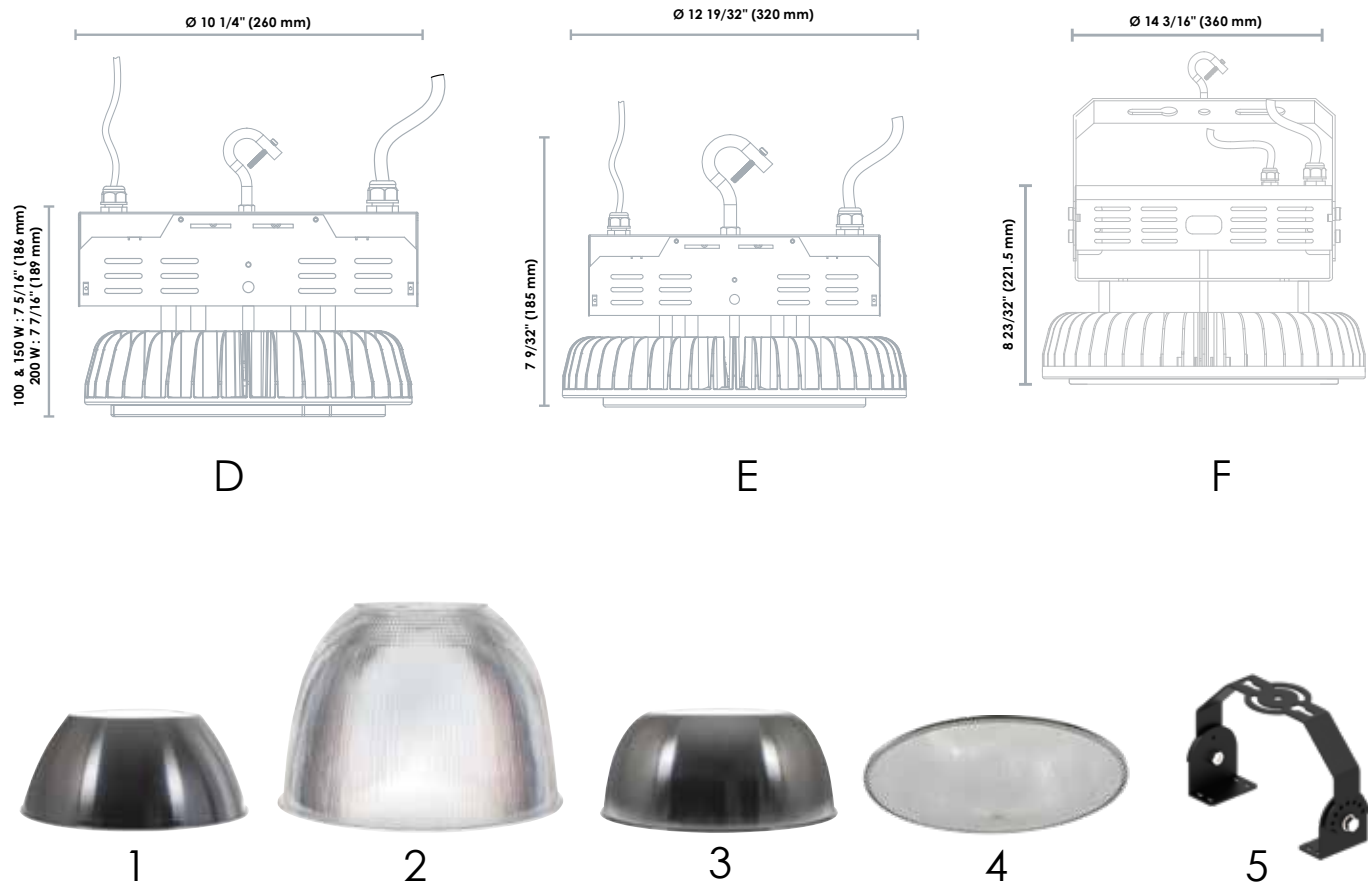

Accessories - Not included

Order Code	Description	Figure	Type	Finish	Beam angle (°)	Compatible wattages
64201	LHBB/ALR60/STD	1	Reflector	Aluminum	60	A, B
64202	LHBB/ALR90/STD	3	Reflector	Aluminum	90	A, B
64203	LHBB/ACR70/STD	2	Reflector	Clear acrylic	70	A, B
66030	LPHBB/ACR60/22IN/STD	2	Reflector	Clear acrylic	60	A, B
66031	LPHBB/ACR/LENS/22IN/STD	4	Lens	Clear acrylic	-	A, B
67135	HBB/S4/ACC/ALR90/PRO/STD	3	Reflector	Aluminum	90	C, D, E
67136	HBB/S4/ACC/ALR60/PRO/STD	1	Reflector	Aluminum	60	C, D, E
67137	HBB/S4/ACC/ACR70/16IN/PRO/STD	2	Reflector	Clear polycarbonate	70	C, D, E
67138	HBB/S4/ACC/ACR70/16IN/LENS/PRO/STD	4	Lens	Clear polycarbonate	70	C, D, E, F
67139	HBB/S4/ACC/ACR70/FR/16IN/PRO/STD	2	Reflector	Frosted polycarbonate	70	C, D, E
67140	HBB/S4/ACC/ACR70/FR/LENS/16IN/PRO/STD	4	Lens	Frosted polycarbonate	70	C, D, E
67141	HBB/S4/ACC/ACR70/22IN/PRO/STD	2	Reflector	Clear polycarbonate	70	C, D, E
67142	HBB/S4/ACC/ACR70/22IN/LENS/PRO/STD	4	Lens	Clear polycarbonate	70	C, D, E, F
67144	HBB/S4/ACC/BACKET/PRO/STD	5	Mounting bracket	Black	-	C, D, E
67143	HBB/S4/ACC/400-500W/ALR90/PRO/STD	3	Reflector	Aluminum	90	F



Lumen values are derived from photometric testing.
For a complete list of compatible dimmers and DLC qualified products,
please visit www.standardpro.com
¹Non-stocked items, contact STANDARD for lead time and minimum order quantity

LED LHBE Eco

This series offers an economical and ecological solution for your high bay applications. With a linear, low profile and durable design, they provide mounting heights ranging from 10 to 50 feet. Take advantage of superior performance while reducing your energy consumption and maintenance costs with this economic solution.



Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 (hrs)	Case qty (master)
2'								
65515	LHBE/S2/110W/2FT/40K/2/DD1/FP/STD	110	120-277	4 000	13 521	84	100 000	1
65516	LHBE/S2/162W/2FT/40K/2/DD1/FP/STD	162	120-277	4 000	20 368	84	100 000	1
65518	LHBE/S2/162W/2FT/50K/2/DD1/FP/STD	162	120-277	5 000	21 222	84	100 000	1
65561 ¹	LHBE/S2/162W/2FT/40K/3/DD1/FP/STD	162	347	4 000	21 060	84	100 000	1
4'								
65517	LHBE/S2/223W/4FT/40K/2/DD1/FP/STD	223	120-277	4 000	26 985	84	100 000	1
65519	LHBE/S2/223W/4FT/50K/2/DD1/FP/STD	223	120-277	5 000	29 213	84	100 000	1
65559	LHBE/321W/4FT/50K/2/DD1/FP/STD	321	120-277	5 000	42 051	84	100 000	1
65562 ¹	LHBE/S2/223W/4FT/40K/3/DD1/FP/STD	223	347	4 000	28 990	84	100 000	1
65560 ¹	LHBE/321W/4FT/50K/3/DD1/FP/STD	321	347	5 000	42 051	84	100 000	1

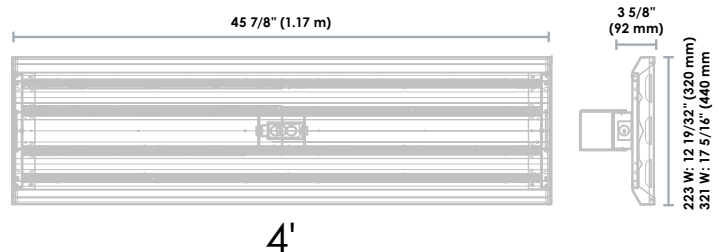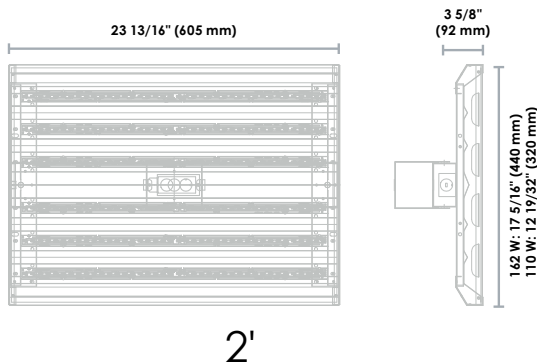

Accessories

Order code	Description	Type	Compatible with
64614	LHBE/ACC/110W-220W/VHOOKCHAIN/STD	Hanger kit	65515, 65517, 65519, 65562
64615	LHBE/ACC/160W/VHOOKCHAIN/STD	Hanger kit	65516, 65518, 65561, 65559, 65560
64616	LHBE/ACC/PENDANTMOUNT/STD	Pendant mount	65515, 65516, 65518, 65517, 65519, 65559
66278	HBL/347/ACC/PENDANTMOUNT/CHOICE/STD	Pendant mount	65561, 65562, 65560
64617	LHBE/ACC/110W/WG/STD	Wireguard	65515
64618	LHBE/ACC/160W/WG/STD	Wireguard	65516, 65518, 65561
64619	LHBE/ACC/220W/WG/STD	Wireguard	65517, 65519, 65562
64620	LHBE/ACC/110W-220W/SMK/STD	Surface mount	65515, 65517, 65519, 65562
64621	LHBE/ACC/160W/SMK/STD	Surface mount	65516, 65518, 65561, 65559, 65560



Lumen values are derived from photometric testing

For a complete list of compatible dimmers and DLC qualified products, please visit www.standardpro.com

¹Stepdown transformer included

