


PHILIPS

Lighting

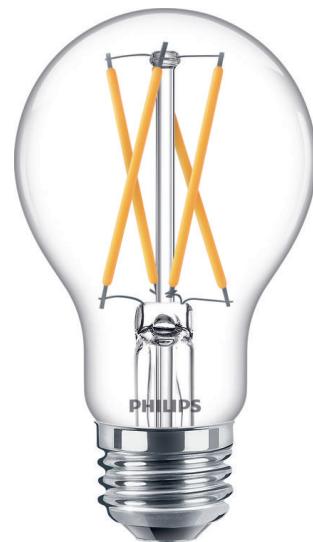

Classic filament LEDbulbs

5A19/PER/927-922/CL/G/E26/WGX 1FB T20

Featuring a classic heritage design, Classic filament LEDbulbs combine the familiar shapes of classic incandescent bulbs with the benefits of the long lasting LED technology. They deliver beautiful, decorative warm-white light while saving around 90% on energy costs compared with traditional light bulbs.

Product data


General Information		Operating and Electrical	
Cap-Base	E26 [Single Contact Medium Screw]	Line Frequency	50 to 60 Hz
Nominal lifetime	15,000 hour(s)	Input Frequency	50 to 60 Hz
Switching Cycle	20,000	Power Consumption	5 W
Rated Lifetime (Hours)	15,000 hour(s)	Lamp Current (Nom)	55 mA
Lighting Technology	LED	Wattage Equivalent	40 W
EU RoHS compliant	Yes	Starting Time (Nom)	0.5 s
Warm-up time to 60% light		Warm-up time to 60% light	0.5 s
Power Factor (Fraction)		Power Factor (Fraction)	0.75
Voltage (Nom)		Voltage (Nom)	120 V
Light Technical		Temperature	
Color Code	927-922 [CCT of 2700K-2200K]	T-Case Maximum (Nom)	50 °C
Beam Angle (Nom)	300 degree(s)	Controls and Dimming	
Luminous Flux	450 lm	Dimmable	Yes
Color Designation	Warm Glow(WG)	Mechanical and Housing	
Correlated Color Temperature (Nom)	2700 2200 K	Bulb Finish	Clear
Luminous Efficacy (rated) (Nom)	90.00 lm/W	Bulb Material	Glass
Color Consistency	<4		
Color rendering index (CRI)	90		
LLMF At End Of Nominal Lifetime (Nom)	70 %		

Classic filament LEDbulbs

Bulb Shape	A19
Approval and Application	
Energy Consumption kWh/1000 h	- kWh
Energy Certifications	Energy Star
EyeComfort	Yes
Product Data	
Order product name	5A19/PER/927-922/CL/G/E26/WGX 1FB T20


Full product name	5A19/PER/927-922/CL/G/E26/WGX 1FB T20
Order code	929001969504
Material Nr. (12NC)	929001969504
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677549480
Numerator - Packs per outer box	6
EAN/UPC - Case	50046677549485

Dimensional drawing




Product	D	C
5A19/PER/927-922/CL/G/E26/WGX 1FB T20	60 mm	108 mm


Photometric data

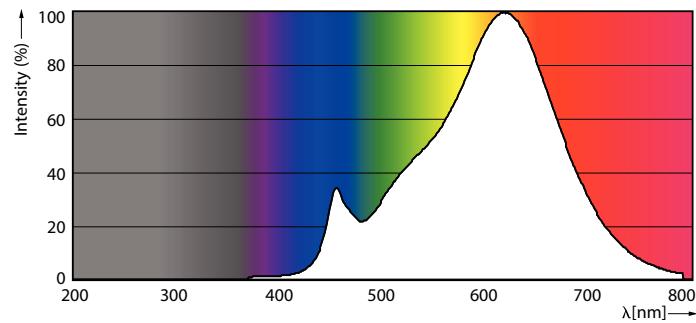

Spectral Power Distribution Colour - 5A19/PER/927-922/CL/G/E26/WGX 1FB T20




General uniform lighting - 5A19/PER/927-922/CL/G/E26/WGX 1FB T20




Light Distribution Diagram - 5A19/PER/927-922/CL/G/E26/WGX 1FB T20

Classic filament LEDbulbs

Lifetime

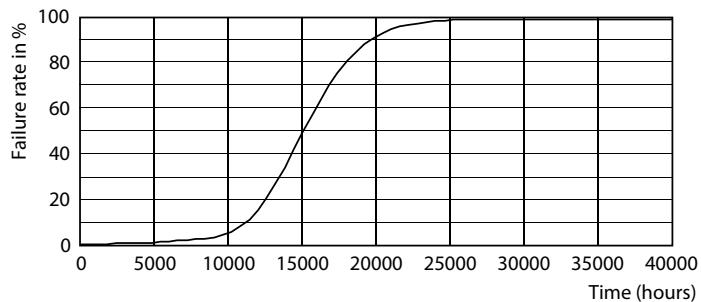

Life Expectancy Diagram - 5A19/PER/927-922/CL/G/E26/WGX 1FB T20

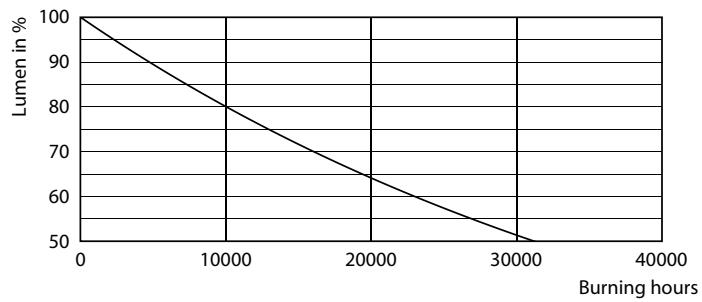

Lumen Maintenance Diagram - 5A19/PER/927-922/CL/G/E26/WGX 1FB T20

