



**2 HOUR FIRE RATING**  
 Tested to comply with UL 263,  
 ASTM E119 & CAN ULC S101



# BRILLIANCE SERIES

## LED FIRE RATED DOWNLIGHT





### DESCRIPTION

RENO's Brilliance Series Fire Rated Recessed Downlights are designed to provide exceptional illumination. These downlights provide two hours of protection in the event of a fire and are perfect solution for installations with low ceiling clearance. High-quality mounting spring, quick connectors, and included junction box. The premium aluminum body of this LED downlight ensures superior durability and aesthetics compared to plastic options. Say goodbye to yellowing with age.

### FEATURES

- 2-Hour fire rating providing a reinforced and heat resistant steel casing
- Multi CCT
- Junction box with commercial grade driver included
- Certified airtight
- Easy installation - NO ADDITIONAL BOX REQUIRED
- Triac Dimming
- 277-347V Driver Available
- Energy-Star
- Wet location Installation
- Rated Lifetime L70(hrs): >50,000
- 5 year warranty

### APPLICATIONS

-  Gallery
-  Commercial Kitchen
-  Office Lighting
-  Residential




## SPECIFICATION

ORDER#	MODEL#	WATTS	SIZE	VOLTAGE (V)	LUMENS	BEAM ANGLE	CCT (K)
R36033	RENO-LED-4-S12W-5CCT-WH-FR	12W	4"	120V	800 lm	108°	27/30/35/40/50K
R36032	RENO-LED-6-S15W-5CCT-WH-FR	15W	6"	120V	1100 lm	108°	27/30/35/40/50K

## ACCESSORIES


ORDER#	MODEL#	DESCRIPTION
R39105	LED-HBL015-347V-D	AC277V-347V Driver for slim panel light 4" & 6" non dimmable



LED-HBL015-347-D

## DIMENSIONS

### 4" SLIM DOWNLIGHT

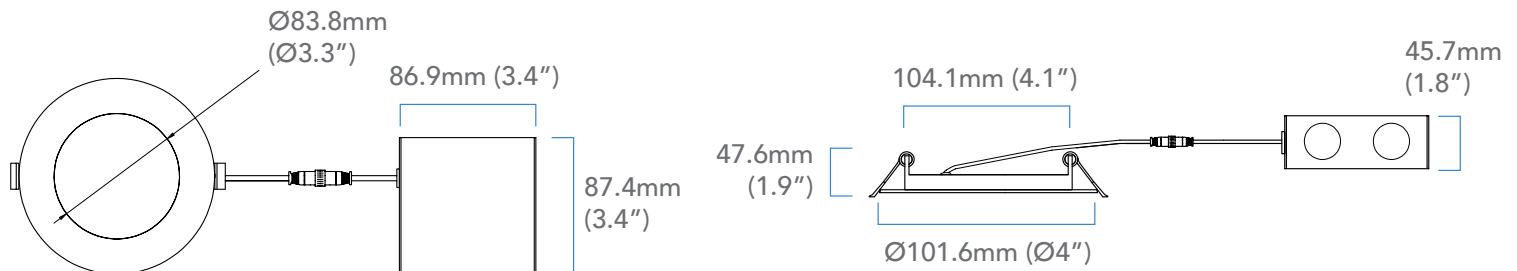

### 6" SLIM DOWNLIGHT

