

Date:

Project Name:

Type:

Part Number:



AURA SERIES

LED SQUARE GIMBAL

 MULTI
CCT

DESCRIPTION

The RENO Lighting's LED Square Gimbal High Output downlight combines a sleek design with a small aperture without any compromise to the light output. With up to 800 lumens and a CRI of 90, this small downlight provides an outstanding performance that will suit both residential and commercial applications.

FEATURES

- IC-Rated and Air-Tight ready and may be in direct contact with insulation
- May be installed in dry wall or suspended ceilings
- Multi CCT
- 90 CRI standard
- Flicker-free 120V forward-phase triac dimming down to 5%
- Energy-Star, JA8 compliant
- Operating temperature: -4°F to 104°F (-20°C to 40°C)
- Rated Lifetime L70(hrs): >50,000
- 5 year warranty

APPLICATIONS



Residential Ceiling



Commercial Lighting



Hotel lobby



905-604-4666



info@renolighting.com



www.renolighting.com

REV. 11/15/23

Date:

Project Name:

Type:

Part Number:



SPECIFICATION

ORDER#	MODEL#	WATTS	VOLTAGE (V)	LUMENS	CCT (K)	BEAM ANGLE	CRI
R36125	RENO-LED-35-S12W-5CCT-WH-SQ	12W	120V	800 lm	2700/3000/3500/ 4000/5000K	40°	90
R36126	RENO-LED-35-S12W-5CCT-BK-SQ	12W	120V	800 lm	2700/3000/3500/ 4000/5000K	40°	90
R36127	RENO-LED-35-24W-FG-5CCT-WH-SQ	24W (2 x 12W heads)	120V	1600 lm	2700/3000/3500/ 4000/5000K	40°	90
R36128	RENO-LED-35-24W-FG-5CCT-BK-SQ	24W (2 x 12W heads)	120V	1600 lm	2700/3000/3500/ 4000/5000K	40°	90

ACCESSORIES

ORDER#	MODEL#	DESCRIPTION
R39107	RENO-MC-123	Multiple Head Universal Pre-Mounting New Construction Plate for 3.5" LED Combo Series
R39108	RENO-MP4	Mounting Plate without clip

DIMENSIONS

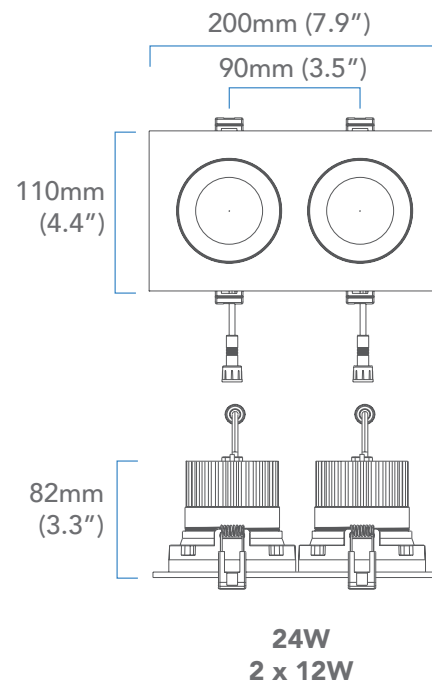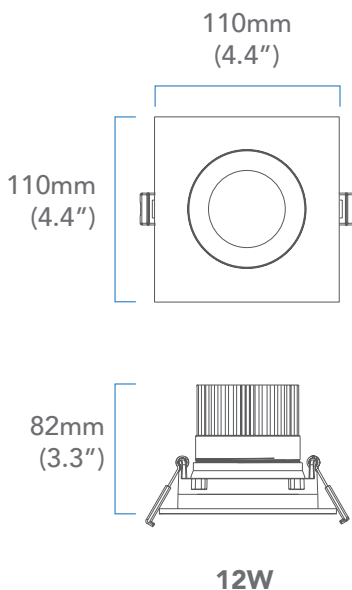

*NOTE: Cut hole size for one head 3-3/4" (95mm)
for two heads: 7-1/4"x3-3/4" (185x95mm)



905-604-4666



info@renolighting.com



www.renolighting.com

REV. 11/15/23