


Date:	Project Name:
Type:	Part Number:



ZETA SERIES

LED MULTI-DOWNLIGHT AL






DESCRIPTION

RENO Lighting's Aluminium Reflector Multifunctional Downlight is a commercial grade downlight fixture. This Energy Star qualified downlight with integrated driver, designed as an energy efficient lighting solution for the Commercial's popular 4"/6"/8"/10" recessed downlight fixtures. Features Dual Voltage 120-347V and easy installation with adjustable wattages and colour temperature.

FEATURES

- Dual Voltage 120-347V
- Multi CCT & Wattage
- Suitable for Type-IC on models: 4", 6", 8" & 10"
- External spring arms install to mounting surface without the need for a traditional recessed can
- Energy-Star, JA8 compliant
- Rated Lifetime L70(hrs): >50,000
- 0-10V Dimming
- CRI >93
- Damp location
- Operating temperature: -4°F to 113°F (-20°C to 45°C)
- 5 year warranty

APPLICATIONS

-  Gallery
-  Commercial Kitchen
-  Office Lighting





Date:	Project Name:
Type:	Part Number:

SPECIFICATION

ORDER#	MODEL#	WATTS	SIZE	VOLTAGE (V)	LUMENS	BEAM ANGLE	CCT (K)
R36221	RENO-DL4-MW-DV-MCCT-AL	6/9/13W	4"	120-347V	558/837/1209 lm	89°	27/30/35/40/50K
R36222	RENO-DL6-MW-DV-MCCT-AL	13/19/27W	6"	120-347V	1209/1767/2511 lm	97°	27/30/35/40/50K
R36223	RENO-DL8-MW-DV-MCCT-AL	18/27/36W	8"	120-347V	1674/2511/3348 lm	97°	27/30/35/40/50K
R36224	RENO-DL10-MW-DV-MCCT-AL	20/30/40W	10"	120-347V	1860/2790/3720 lm	97°	27/30/35/40/50K

DIMENSIONS

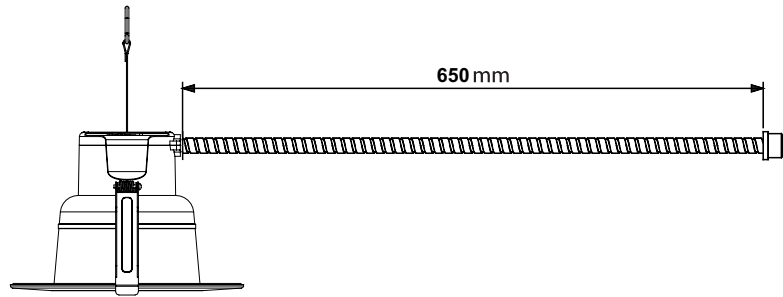

MODEL	A	B	C	Min. CUT OUT	Max CUT OUT
4"	4.13"	5.91"	5.57"	4.33"	5.51"
6"	5.36"	8.27"	5.62"	5.91"	7.48"
8"	6.54"	10.24"	6.29"	7.48"	9.45"
10"	7.45"	11.22"	6.76"	8.27"	10.24"