

Date:	Project Name:
Type:	Part Number:



BUILT IN  
MICROWAVE SENSOR

# HELIOS SERIES

## LED WRAP AROUND MS

## DESCRIPTION

The Helios series embraces a minimalist design while providing a wide array of features making this fixture adaptable to any indoor application. Utilize the colour and wattage selections built into the fixture to create the perfect look. Easy to install and built to last, this series is sure to impress.

## FEATURES

- DLC Premium
- Dual Voltage 120-347V
- 0-10V Continuous Dimming
- Surface or Suspension Mounting options
- Easy and Safe Installation
- Frosted Polycarbonate Lens
- Rated Lifetime L70(hrs): >70,000
- Operation Temperature: -22°F to 122°F (-30°C to 50°C)
- Suitable for Damp Locations
- Includes Coverplate and V-Hangers
- Sensor Available
- CRI > 80
- 7 year warranty

## APPLICATIONS



Corridors




Education Facilities



Low Bay Application



Multi-res/Retirement



**\*THE MAXIMUM HEIGHT THIS FIXTURE CAN BE MOUNTED FOR OPTIMAL SENSOR FUNCTION IS 12-13FT. IF MOUNTED ABOVE THIS HEIGHT MOTION WILL NOT BE DETECTED AS PRECISELY\***



905-604-4666



info@renolighting.com



www.renolighting.com

REV.10/04/23

## SPECIFICATION

ORDER#	MODEL#	WATTS	VOLTAGE (V)	SIZE	LUMENS	HOURS RATING	CCT (K)	DLC PREMIUM
R38003	RENO-HWR2-MW-DV-MCCT-MS	12/15/18/22W	120-347V	2FT	1560/1950/ 2340/2860 lm	70,000	35/40/50K	✓
R38004	RENO-HWR4-MW-DV-MCCT-MS	22/28/34/44W	120-347V	4FT	2860/3640/ 4420/5720 lm	70,000	35/40/50K	✓

## ACCESSORIES

ORDER#	MODEL#	DESCRIPTION
R83004	RENO-EM-C08	Emergency LED Driver

## SENSOR OPTIONS

ORDER#	MODEL#	DESCRIPTION
R74002	RENO-SENSOR-PIR-H-EX	For external mounting when installed above 13FT


## REMOTE OPTIONS

ORDER#	MODEL#	DESCRIPTION
R73002	RENO-REMOTE-H	Remote Control

Date:	Project Name:
Type:	Part Number:

## DIMENSIONS

**2FT.**

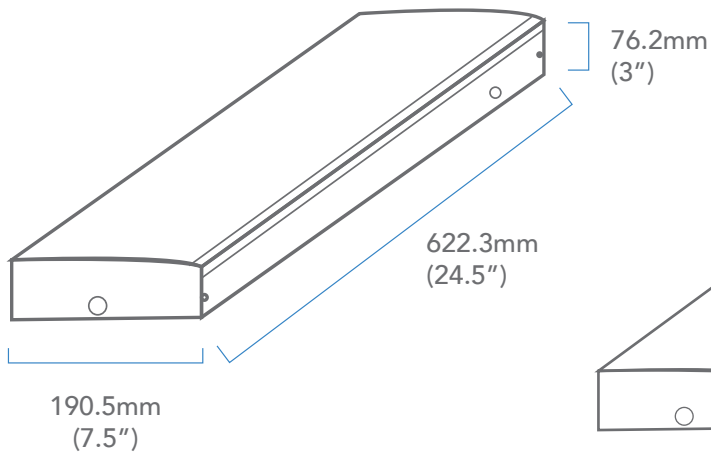

**4FT.**

