

Date:	Project Name:
Type:	Part Number:



ZETA SERIES

LED MULTI-DOWNLIGHT



DESCRIPTION

RENO's Multifunctional Downlight is a commercial grade downlight fixture. This Energy Star qualified downlight with integrated driver, designed as an energy efficient lighting solution for the Commercial's popular 4"/6"/8"/10" recessed downlight fixtures. Features Dual Voltage 120-347V and easy installation with adjustable wattages and colour temperature.

FEATURES

- Dual Voltage 120-347V
- Multi CCT & Wattage
- Suitable for Type-IC on models: 4", 6", & 8"
- External spring arms install to mounting surface without the need for a traditional recessed can
- Energy-Star, JA8 compliant
- Rated Lifetime L70(hrs): >50,000
- 0-10V Dimming
- CRI >93
- Suitable for wet location
- Operating temperature: -13°F to 113°F (-25°C to 45°C)
- 5 year warranty

APPLICATIONS




Gallery



Commercial Kitchen



Office Lighting




Date:	Project Name:
Type:	Part Number:

SPECIFICATION

ORDER#	MODEL#	WATTS	SIZE	VOLTAGE (V)	LUMENS	BEAM ANGLE	CCT (K)
R39205	RENO-DL4-MW-DV-MCCT-G2	9/13/18W	4"	120-347V	837/1209/1674 lm	95°	27/30/35/40/50K
R39206	RENO-DL6-MW-DV-MCCT-G2	13/19/27W	6"	120-347V	11209/1767/2511 lm	95°	27/30/35/40/50K
R39207	RENO-DL8-MW-DV-MCCT-G2	18/27/36W	8"	120-347V	1674/2511/3348 lm	95°	27/30/35/40/50K
R39208	RENO-DL10-MW-DV-MCCT-G2	22/34/45W	10"	120-347V	2046/3162/4185 lm	95°	27/30/35/40/50K

DIMENSIONS

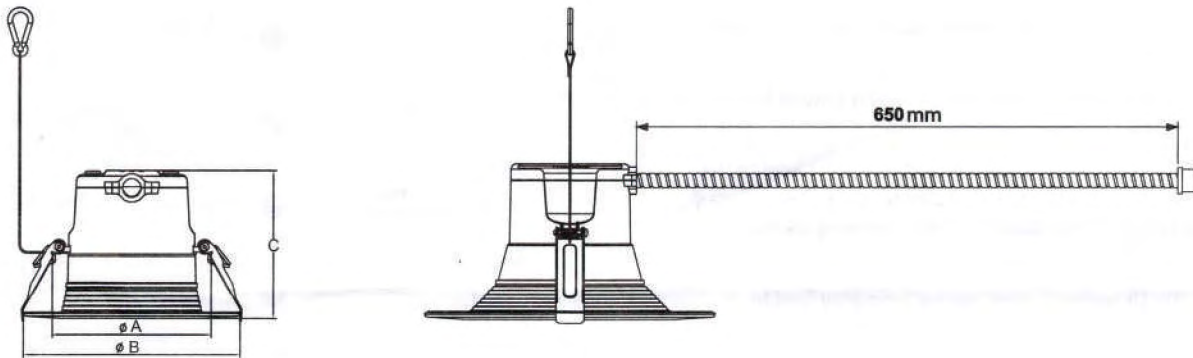

MODEL	A	B	C	Min. CUT OUT	Max CUT OUT
4"	4.33"	5.91"	4.02"	4.33"	5.51"
6"	5.91"	8.27"	4.41"	5.91"	7.48"
8"	7.48"	10.24"	4.76"	7.48"	9.45"
10"	8.27"	11.22"	4.76"	8.27"	10.24"