

Date:	Project Name:
Type:	Part Number:



T5 TYPE B

FEATURES

- Built-in safety switch prevents electrical shock during installation
- Operates directly on 120-277V line voltage
- Direct replacement for T5/HO Fluorescent Lamp Rated for use in fully enclosed fixtures.
- Suitable for use in dry and damp locations
- NSF Listed: NSF/ANSI Standard 2 - Food Equipment
- Suitable for use in dry and damp locations
- NSF Listed: NSF/ANSI Standard 2 - Food Equipment
- Operating temperature: -4°F to +113°F (-20°C to +45°C)
- Rated Lifetime L70(hrs): >50,000
- 7 year warranty

APPLICATIONS

- Food Service Equipment
- Office Lighting
- Residential
- Retail Lighting



Date:	Project Name:
Type:	Part Number:


SPECIFICATION

ORDER#	MODEL#	WATTS	SIZE	VOLTAGE (V)	LUMENS	BASE TYPE	BEAM ANGLE	CCT (K)
R42106	WLL-LEDT5BP9D/840	9W	2FT	120-277V	1200 lm	G5	330°	4000K
R42107	WLL-LEDT5BP12D/840	12W	3FT	120-277V	1600 lm	G5	330°	5000K
R42108	WLL-LEDT5BP13D/840	13W	4FT	120-277V	1800 lm	G5	330°	4000K
R42101	WLL-LEDT5BP25DV/840	25W	4FT	120-277V	3300 lm	G5	330°	4000K
R42102	WLL-LEDT5BP25DV/850	25W	4FT	120-277V	3400 lm	G5	330°	5000K


** 3000K/3500K DLC available MOQ REQ**

DIMENSIONS

2FT

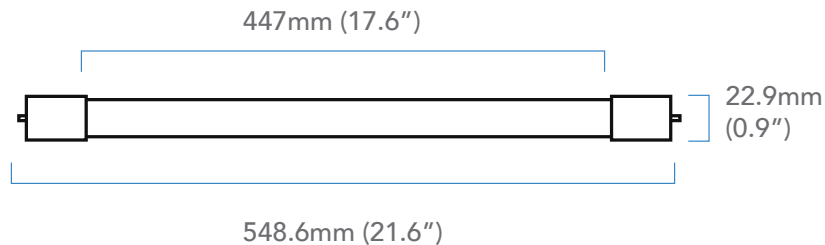

3FT

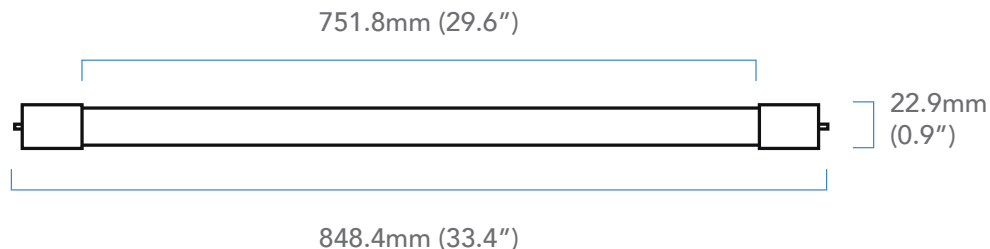

4FT

