


Low Voltage Relays



Universal Guards

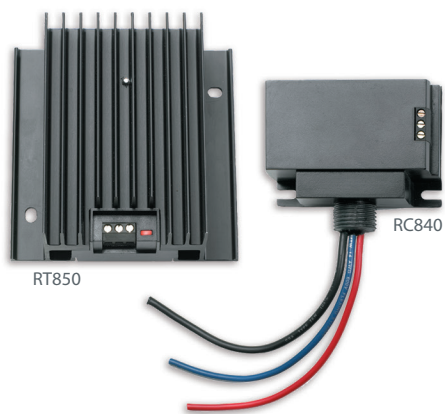

On/Off Relays

Product #	Volts 60 Hz	Resistive Charge (A)
Without transformer		
RC840	120/208/240 347	22 18
R841D1036	600	10
With transformer		
RC840T-120	120	22
RC840T-240	208/240	22
RC840T-347	347	18
R841C1151	600	10

Note: Not recommended for fast-cycling modulated regulation (more than 6 cycles/hr). For fast-cycling heating equipment Solid State Relay.

Meant for external installation only. For installation inside heaters, refer to the options table of the concerned product series.

Universal Guards

Product #	Description	Inside Dimension (Length X Height X Depth)
F29-0143	Clear plastic thermostat guard	6 3/8 in. X 3 1/2 in. X 3 in.
F29-0198	thermostat guard	8 1/4 in. X 5 3/8 in. X 3 1/2 in.
F29-0193	Metal thermostat guard	6 in. X 3 13/16 in. X 3 1/8 in.

Triac Relays

Product #	Volts 60 Hz	Resistive Charge (A)	Input Signal
Without transformer			
RT850	100 to 347	23	4-32VDC, 24VAC
CCT-25-1-C1	208/240/347	25	3-32VDC, 24VAC
CCT-30-1-C2	48-600	30	3-32VDC, 24VAC
With transformer			
RT850T-240	208/240	23	19.2/24VAC
RT850T-347	347	23	24VAC
CCT-25-1-C2-T	208/240/277/347	25	14.4/16.6/19.2/24VAC

Note: Meant for external installation only. For installation inside heaters, refer to the options table of the concerned product series.