

# LED MOOD TAPE KIT

Flexible 4/5/10-Meter (157-1/2" / 196-7/8" / 393-11/16"), Full Color, Indoor/Outdoor – IP65 Accent Lighting

Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/Phone		
Notes		

## Features

### Lighting Performance

Available in 250-450 lumens per meter options, this high density full color (RGB + Tunable White) LED maintains uniform intensity. It provides full color with its RGB channels and full 2200 K to 6500 K whites through the dedicated tunable white channels producing up to 450 lumens per meter at 3500 K.

### Color Temperature

Achieves full color, combining RGB and Tunable White (2200 K - 6500 K), with 90+ CRI in the Tunable White range and an R9 of up to 95.

### Lumen Maintenance

LEDs reduce ongoing maintenance, has a rated life of over 50,000 hours.

### Power Consumption

Operates as a constant voltage load at 24VDC, and consumes up to 0.20 Amps / 6 Watts per meter.

### Dimming

The LED tape is Wi-Fi dimmable when used with our OnCloud Adapter, or High Power OnCloud Adapter (sold separately). See page 2 for driver options.

**Note:** Not compatible with standard dimmers.

### Beam Spread

This LED tape features a 120° linear beam spread to provide even light distribution.

### Operating Temperature

-20°C~42°C (-4°F~108°F).

### Mounting

This flexible LED tape is provided with a 3M® high bond adhesive backing that provides secure mounting to smooth surfaces.

### Environment

Suitable for dry, damp and wet locations; tape is IP65 rated. **Note:** For installation in wet locations, do not cut the tape and make all electrical connections in an appropriate enclosure

### LED Driver

24V DC driver available as plug-in or hardwire, with a DC 2.1 connector. Drivers feature open and short circuit protection, and over voltage protection.

### OnCloud Adapter / High Power OnCloud Adapter

An integrated constant voltage LED driver and a Wi-Fi + Bluetooth controller module. Available in 40W and 96W.

### Kit Includes

- Tape at selected length with powerfeed
  - LED driver
  - 24V 5-channel OnCloud adapter
  - DC 2.1 jack low-voltage powerfeed
  - Extrusion with lens and end caps (optional)
- Note:** Connectors sold separately, see accessories below.

### Start-Up Kit Includes

- All items in the above kit, plus
- Room Controller
- 2 x Power Feed
- 4 x Jumper
- 10-ft SJT6 AWG20 extension cable



SPECIFICATION	
Application	Undercabinet
Approved location	Wet
Beam Angle	120°
CCT	RGB + Tunable White (2200 K ~ 6500 K)
Certification	cETLus
CRI	90+
Dimming	Yes*
Dimming Technology	Wireless OnCloud
LED Density	180 LEDs/m, groups of 3 (WW/CW/RGB)
Link Connector	TP-CON-12MM6PIN-I-10
Lumens	Up to 450lm/m (140lm/ft)
Lumens per watt	Up to 90
Max. Op. Temp.	42°C (108°F)
Maximum Run	10 meters
Min. Start Temp.	-20°C (-4°F)
Power Supply Type	Constant Voltage
Projected Life	70% @ 50,000 hrs
Voltage	24V DC
Warranty	3 Years
Wattage	Up to 6W per meter

\* Not compatible with standard dimmers.



## Description

The Mood Tape Kit includes Tape at selected length, LED driver, OnCloud Adapter, low-voltage powerfeed, and extrusion (optional). This LED tape provides ample illumination for residential, retail and commercial accent lighting. Suitable for dry, damp and wet locations.

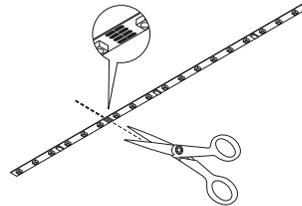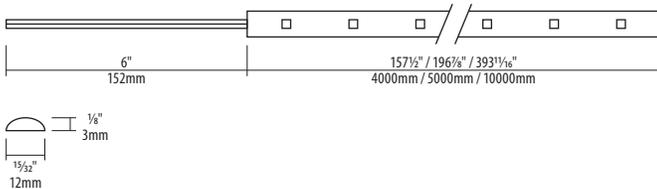

### Cuttable

(Every 4" / 102mm)  
Use Silicone (not included) to seal cut end.



**Notes:** Accessories should be ordered separately. For additional options please consult your Liteline representative. Due to our continued efforts to improve our products, product specifications are subject to change without notice.

## Ordering Guide

TP-	Length	Wattage	Driver	Lens + Channel <sup>2</sup>
	- MT	- OCKIT		
	<b>0540</b> : 5-meter, 40W Adapter	<b>03</b> : 3W/m	<b>1</b> : Hardwire <b>2</b> : Plug-in <sup>1</sup>	Leave blank for no extrusion <b>1</b> : LED-TP-AL1607 <b>2</b> : LED-TP-AL1715SA <b>3</b> : LED-TP-AL1715RA
	<b>0540</b> : 5-meter, 40W Adapter	<b>04</b> : 4W/m		
	<b>1040</b> : 10-meter, 40W Adapter			
	<b>0440</b> : 4-meter, 40W Adapter	<b>06</b> : 6W/m		
	<b>1098</b> : 10-meter, 96W High Power Adapter			

<sup>1</sup> Plug-in driver can only be used with 5-meter 40W adapter and 4-meter 40W adapter. <sup>2</sup> Appropriate amount will be provided in 2M (6ft) lengths, tape connectors require a gap.


## Mood Tape Start-Up Kits (Lens + Channel / Accessories sold separately)



**TP-0540-MT04-OCKIT3**  
5-meter, 4W/m, 40W OnCloud Adapter, 60W Hardwire Driver, Room Controller, 2x Power Feed, 4x Jumper, 10-ft SJT6 AWG20 extension cable.



**TP-1098-MT06-OCKIT3**  
10-meter, 6W/m, 96W High Power OnCloud Adapter, 100W Hardwire Driver, Room Controller, 2x Power Feed, 4x Jumper, 10-ft SJT6 AWG20 extension cable.

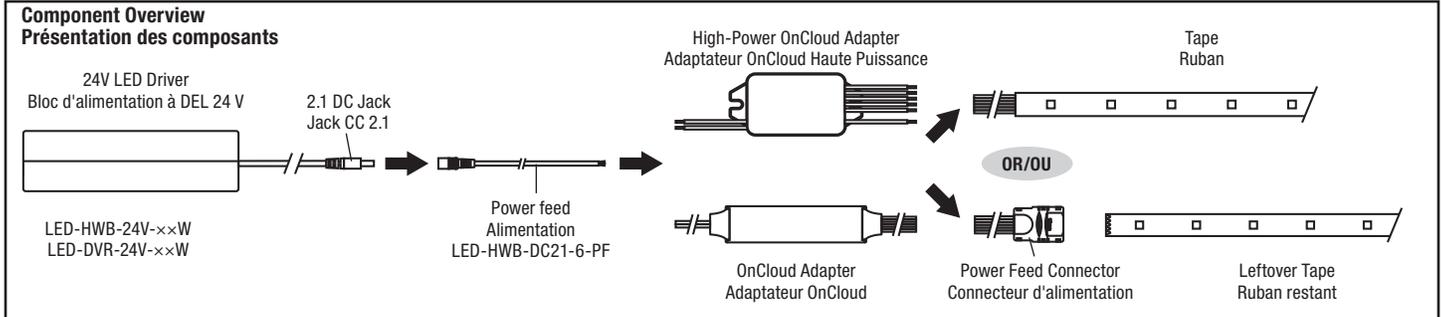

## Additional Tape



**TP-5M03W-RGBTW95A-65**  
5-Meter roll, 250lm per meter (3W per meter), IP65, 24VDC, RGB and 2200 K - 6500 K.



**TP-5M04W-RGBTW95A-65**  
5-Meter roll, 350lm per meter (4W per meter), IP65, 24VDC, RGB and 2200 K - 6500 K.



**TP-10M04W-RGBTW95A65**  
10-Meter roll, 350lm per meter (4W per meter), IP65, 24VDC, RGB and 2200 K - 6500 K.



**TP-4M06W-RGBTW95A-65**  
4-Meter roll, 450lm per meter (6W per meter), IP65, 24VDC, RGB and 2200 K - 6500 K.



**TP-10M06W-RGBTW95A65**  
10-Meter roll, 450lm per meter (6W per meter), IP65, 24VDC, RGB and 2200 K - 6500 K.

## Extrusions



### SURFACE MOUNT LED-TP-AL1607

- 7mm deep
- 3W: 105lm/m (32lm/ft)
- 4W: 168lm/m (51lm/ft)
- 6W: 264lm/m (80.5lm/ft)
- Compatible with tape up to 12mm wide
- 2m (6ft)
- Includes end caps (2 pcs) and mounting clips (4 pcs)

Dot Rendering Scale



Semi-Diffused



**LED-TP-AL1607-EC**  
End cap for LED-TP-AL1607, 2-pack.



**LED-TP-AL1607-MC**  
Mounting clips for LED-TP-AL1607, 4-pack.



### SURFACE MOUNT LED-TP-AL1715SA

- 15mm deep
- 3W: 96lm/m (29lm/ft)
- 4W: 154lm/m (47lm/ft)
- 6W: 242lm/m (74lm/ft)
- Compatible with tape up to 12mm wide
- 2m (6ft)
- Includes end caps (2 pcs) and mounting clips (4 pcs)

Dot Rendering Scale



Mostly Diffused



**LED-TP-AL1715SA-EC**  
End cap for LED-TP-AL1715SA, 2-pack.



**LED-TP-AL1715SA-MC**  
Mounting clips for LED-TP-AL1715SA, 4-pack.



### RECESSED MOUNT LED-TP-AL1715RA

- 15mm deep
- 3W: 96lm/m (29lm/ft)
- 4W: 154lm/m (47lm/ft)
- 6W: 242lm/m (74lm/ft)
- Compatible with tape up to 12mm wide
- 2m (6ft)
- Includes end caps (2 pcs)

Dot Rendering Scale



Mostly Diffused



**LED-TP-AL1715RA-EC**  
End cap for LED-TP-AL1715RA, 2-pack.

## Connectors (Not rated for wet location)



**TP-CON-12MM6PIN-F-10**  
6-Pin 24VDC 5 Amps max. 175mm power feed. For use with TP-xM0xW-RGBTW95A-65. 10 pack.



**TP-CON-12MM6PIN-I-10**  
6-Pin 24VDC 5 Amps max. "I" connector. For use with TP-xM0xW-RGBTW95A-65. 10 pack.



**TP-CON-12MM6PIN-P-10**  
6-Pin 24VDC 5 Amps max. 175mm jumper. For use with TP-xM0xW-RGBTW95A-65. 10 pack.

## OnCloud



**LC-CRTL-SCENE-1**  
OnCloud Room Controller, Wi-Fi, On/OFF, CCT, Dimming and favourite scenes.



**LC-CRTL-RMT01WIZ-BK**  
OnCloud multi-function remote control.



**LC-DVR-CV96W1MT03-5C**  
**LC-DVR-CV96W1MT04-5C**  
**LC-DVR-CV96W1MT06-5C**  
40W, 24V 5-Channel OnCloud adapter, controls wireless dimming, white turning, color and on/off capability. Compatible with the WIZ app, Room Controller and smart speakers.



**OC-DVR-CV96W1MT03-5C**  
**OC-DVR-CV96W1MT04-5C**  
**OC-DVR-CV96W1MT06-5C**  
96W, 24V 5-Channel High Power OnCloud adapter, controls wireless dimming, white tuning, color and on/off capability. Compatible with the WIZ app, Room Controller and smart speakers.

## Plug-in Drivers (non-dimming)



**LED-DVR-24V-36W**  
LED plug-in driver with DC 2.1 jack, 24V, 36W.



**LED-DVR-24V-60W**  
LED plug-in driver with DC 2.1 jack, 24V, 60W.

### Power feed required



**LED-HWB-DC21-6-PF**  
DC 2.1 barrel plug to bare leads power feed.

## Indoor Hardwire Drivers (non-dimming)



**LED-HWB-24V-36W**  
LED hardwire driver with DC 2.1 jack, 24V, 36W.



**LED-HWB-24V-100W**  
LED hardwire driver with DC 2.1 jack, 24V, 100W.



**LED-HWB-24V-60W**  
LED hardwire driver with DC 2.1 jack, 24V, 60W.

### Power feed required



**LED-HWB-DC21-6-PF**  
DC 2.1 barrel plug to bare leads power feed.

## Extension Cable



**AW20-RGBTW-SJT6-50**  
50-ft SJT6 AWG20 extension cable