


# 278-S00

30 Amp Flush Mount Outlet/Receptacle

30 Amp, 125/250 Volt, NEMA 14-50R, 3-Pole, 4-Wire, Flush Mount Outlet/Receptacle, Straight Blade, Grounding, Side Wired, Steel Strap – Black

**WARNING:** Do not use with single-gang wallboxes, single-gang mud rings or single-gang box extenders.

- DURABLE – Shallow design built of durable high-impact thermoplastic
- EASY TO INSTALL – Terminals marked for easy identification and fast wiring, terminals require 40 in lbs
- EFFICIENT – Features heavy-gauge, high-performance copper contacts
- CONVENIENT – All mounting hardware included
- COMPATIBLE – Fits all wallplates with 2.15" diameter center hole

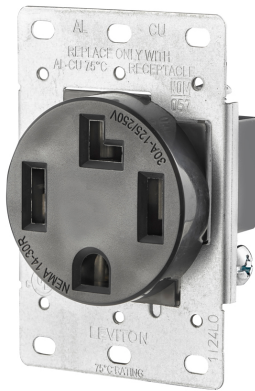

UPC Code : 078477695319

Country Of Origin : Mexico

NEMA :  14-30R

## Technical Information

### AC Horsepower Ratings

**At Rated Voltage :** 2 HP

### Electrical Specifications

**Amperage :** 30 A

**Current Limiting :** Full Rated Current

**Dielectric Voltage :**  
Withstands 2000V per UL498

**Grounding :** Grounding

**Pole :** 3

**Temperature Rise :** Max 30C after 50 cycles OL at 150 percent rated current

**Voltage :** 125/250 VAC

**Wire :** 4

### Environmental Specifications

**Flammability :** Rated V-2 per UL 94

**Operating Temperature :** -40° C to 60°C

### Material Specifications

**Body Material :** Polypropylene

**Color :** Black

**Face Material :** Polypropylene

**Line Contacts :** Brass Double-Wipe

**Strap Material :** Galvanized Steel

### Mechanical Specifications

**Product ID :** Ratings are permanently marked on device

**Terminal Accom. :** #4 AWG

### Product Features

**Amperage :** 30 A

**Color :** Black

**NEMA :** 14-30R

**Terminal ID** : X (Brass screw or Black screw) = Hot; Y (Brass screw or Black screw) = Hot; White (Silver screw) = Neutral; Green (Green screw) = Ground

**Voltage** : 125/250 VAC

**Torque Range** : 40 in-lbs.

Standards and Certifications

**ANSI** : C73

**CSA** : 22.2 No 42, C22.2 No. 14, C22.2 No.65

**File** : E13399


**NEMA** : WD-6

**NOM** : NOM - ANCE

**UL** : UL 498, UL 486E

**Warranty** : 2-Year Limited

## Wiring Diagram



### SPECIFICATION SUBMITTAL

<p><b>JOB NAME:</b></p> <input type="text"/>	<p><b>CATALOG NUMBERS:</b></p> <input type="text"/>
<p><b>JOB NUMBER:</b></p> <input type="text"/>	<input type="text"/>

**Leviton Manufacturing Co., Inc**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S. T. Monday-Friday): +1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52) 5386- 1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2024 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts](http://www.leviton.com/international/contacts)

**© 2024 Leviton Manufacturing Co., Inc.**