

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT PART # | TAB SIZE in. [mm] | WIRE RANGE | | COLOR | DIMENSIONS in. [mm] | | | TOOL CHART | | |
|----------------|----------------------------------|-------------|------------------------|--------|-------------------------------|---------------|---------------|---------------|----------------------|---------------|
| | | ENGLISH AWG | METRIC mm ² | | MAX. WIRE INSULATION DIAMETER | L ± .03 [0,8] | W ± .01 [0,3] | H ± .01 [0,3] | PRESS | |
| | | | | | | | | | CP-871, UC200, UC100 | CP-871, UC200 |
| | | | | | | | | | **APPLICATORS | |
| | | | | | | | CA9 | CA-800EZ | | |
| | | | | | | | DIES | | | |
| | | | | | | | CD9-1A | CD-800-1 | | |
| | | | | | | | CD9-2A | CD-800-2 | | |
| | | | | | | | CD9-3B | CD-800-3 | | |
| DV18-250B | .250 X .032 [6,3 X 0,8] | 22-18 | 0,5-1,0 | RED | .15 [3,8] | .83 [21,1] | .29 [7,4] | .12 [3,0] | CD9-1A | CD-800-1 |
| DV18-205B | .205/.187 X .032 [5,2/4,8 X 0,8] | | | | | .77 [19,6] | .25 [6,4] | .12 [3,0] | | |
| DV18-206B | .205/.187 X .020 [5,2/4,8 X 0,5] | | | | | .77 [19,6] | .25 [6,4] | .11 [2,8] | | |
| DV18-187B | .187 X .032 [4,8 X 0,8] | | | | | .77 [19,6] | .23 [5,8] | .10 [2,5] | | |
| DV18-188B | .187 X .020 [4,8 X 0,5] | | | | | .77 [19,6] | .23 [5,8] | .09 [2,3] | | |
| DV14-250B | .250 X .032 [6,3 X 0,8] | 16-14 | 1,5-2,5 | BLUE | .17 [4,3] | .83 [21,1] | .29 [7,4] | .12 [3,0] | CD9-2A | CD-800-2 |
| DV14-205B | .205 X .032 [5,2 X 0,8] | | | | | .77 [19,6] | .25 [6,4] | .12 [3,0] | | |
| DV14-206B | .205/.187 X .020 [5,2/4,8 X 0,5] | | | | | .77 [19,6] | .25 [6,4] | .11 [2,8] | | |
| DV14-187B | .187 X .032 [4,8 X 0,8] | | | | | .77 [19,6] | .23 [5,8] | .10 [2,5] | | |
| DV14-188B | .187 X .020 [4,8 X 0,5] | | | | | .77 [19,6] | .23 [5,8] | .09 [2,3] | | |
| *DV10-250 | .250 X .032 [6,3 X 0,8] | 12-10 | 4,0-6,0 | YELLOW | .23 [5,8] | .95 [24,1] | .29 [7,4] | .12 [3,0] | CD9-3B | CD-800-3 |


*NOT UL LISTED OR CSA CERTIFIED
 **APPLICATOR FOOTPRINT MAY BE COMPATIBLE WITH OTHER COMMON PRESSES OR WIRE PROCESSING MACHINES

NOTES:

- USED FOR:
 - STRANDED COPPER WIRE ONLY
 - 221°F [105°C] MAX. OPERATING TEMPERATURE
 - 600V. MAX. BLDG WIRE
 - 6-12 LBS INTIAL INSERTION/WITHDRAWAL FORCE
- MATERIAL:
 - STAMPING: CDA 260 BRASS, TIN PLATED
 - HOUSING: VINYL
- WIRE STRIP LENGTH:

9/32 ^{+1/32}₋₀ [7,1 ^{+0,8}₋₀]

11/32 ^{+1/32}₋₀ [8,7 ^{+0,8}₋₀] FOR DV10-250
- SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- THE DV10-250 IS CONSTRUCTED WITH BRASS SLEEVE IN THE WIRE CRIMP AREA

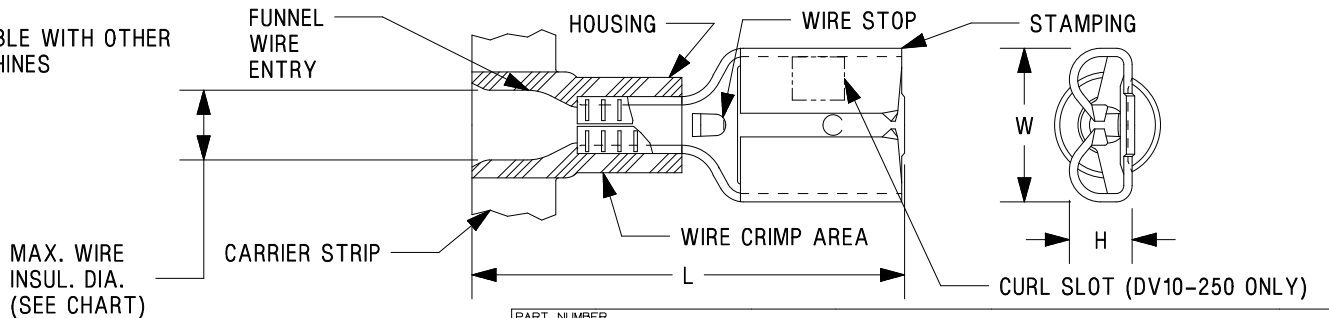

LISTED
20H3
E78522



CERTIFIED
LR31212

| | | | | | |
|--------------------|-------------------------------------|----------------|--------|--------------|------|
| PART NUMBER | SEE TABLE | | | | |
| TITLE | FEMALE DISCONNECTS, VINYL INSULATED | | | | |
| ITEM REVISION NAME | CUSTOMER DRAWING | | | | |
| ITEM REVISION NAME | N41169BA/12 | | | | |
| DATASET FILE NAME | N41169BA_DC/12B | | | | |
| | | | | | |
| MATERIAL | SEE NOTES | DRAWING NUMBER | | | |
| | | A41169 | | | |
| DRAWN BY | DATE | CHK | SCALE | SHEET | SIZE |
| DSM | - | LA | N.T.S. | SHEET 1 OF 1 | A |

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|-----|----------|------|------|------|--|-----------|
| 12B | 06-03-24 | NM | JBN | MRWA | ADDED CURL SLOT FEATURE | 098711/01 |
| 12A | 02-02-21 | JHNU | JADE | JADE | REMOVED CP-861, CP-862 ADDED UC100, UC200 FORMATTED TOOL CHART | 098711/00 |

A-SIZE CUSTOMER