



PL-C Cluster 4-Pin Base

PL-C 13W/830/4P/ALTO 10PK

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

Product data

General Information	
Cap-Base	G24q-1

Light Technical	
Color Code	830 [CCT of 3000K]
Luminous Flux	900 lm
Luminous Efficacy (rated) (Nom)	72 lm/W
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	3000 K
Color rendering index (CRI)	82

Operating and Electrical	
Power Consumption	13.0 W
Lamp Current (Nom)	0.170 A


Controls and Dimming	
Dimmable	Yes

Approval and Application	
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	15 kWh

Product Data	
Order product name	PL-C 13W/830/4P/ALTO 10PK
Full product name	PL-C 13W/830/4P/ALTO 10PK
Order code	383265
Material Nr. (12NC)	927907183030
Numerator - Quantity Per Pack	1
Net Weight (Piece)	49.900 g
EAN/UPC - Product/Case	046677359348
Numerator - Packs per outer box	10
EAN/UPC - Case	60046677359340


PL-C Cluster 4-Pin Base

Dimensional drawing




Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
PL-C 13W/830/4P/ALTO 10PK	27.1 mm	27.1 mm	97.5 mm	117.0 mm	131.9 mm

Photometric data

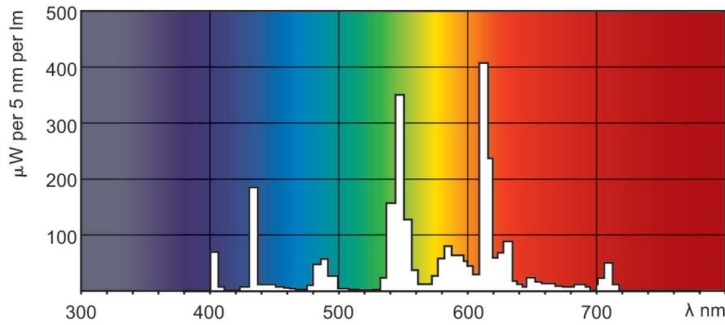


Spectral Power Distribution Colour - PL-C 13W/830/4P/ALTO 10PK

Lifetime

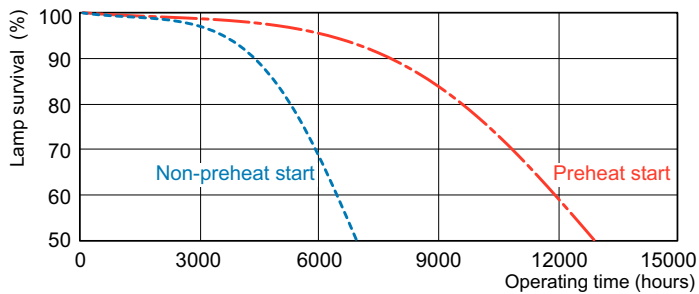


Life expectancy diagram - 3 hour cycle

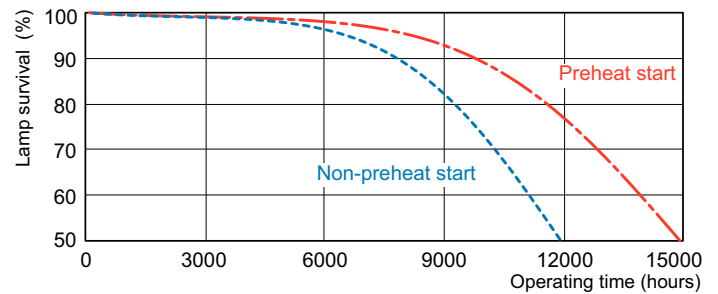

Life expectancy diagram - 12 hour cycle

PL-C Cluster 4-Pin Base

Lifetime

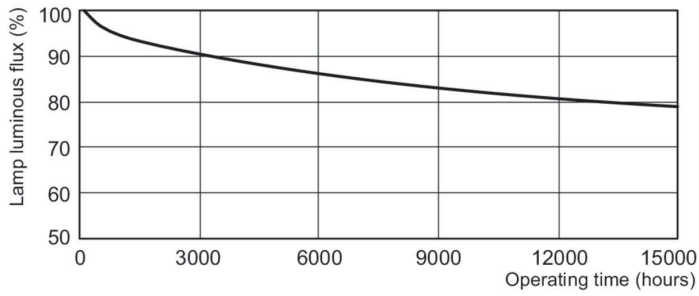

Lumen Maintenance Diagram - PL-C 13W/830/4P/ALTO 10PK

