



Busbar system, accessories Busbar center-to-center spacing 40, 60 mm  
Connection terminal Bar thickness: 5 mm 16-70 mm<sup>2</sup>

| Model                                                                         |                                                          |
|-------------------------------------------------------------------------------|----------------------------------------------------------|
| product brand name                                                            | SETRON                                                   |
| product designation                                                           | Connecting terminal                                      |
| design of the product                                                         | Accessories                                              |
| Supply voltage                                                                |                                                          |
| operating voltage at AC rated value                                           | 690 V                                                    |
| Dissipation                                                                   |                                                          |
| power loss [W]                                                                | 0 W                                                      |
| suitability for use                                                           | for busbars 12, 15, 20, 25, 30 x 5 mm and mounting rails |
| according UL                                                                  |                                                          |
| operational current according to UL 508 rated value                           | 175 A                                                    |
| Connections                                                                   |                                                          |
| type of connectable conductor cross-sections for AWG cables                   | AWG 42/0                                                 |
| type of connectable conductor cross-sections for copper conductor stranded    | 16-70 mm <sup>2</sup>                                    |
| type of connectable conductor cross-sections of the laminated conductor rails | Cu lam. 2x9x0.8 mm or 6x9x0.8 mm or 6x13x0.5 mm          |
| Mechanical Design                                                             |                                                          |
| net weight                                                                    | 71 g                                                     |
| Approvals Certificates                                                        |                                                          |
| General Product Approval                                                      | Test Certificates                                        |



[Confirmation](#)



[Miscellaneous](#)

| other                         | Environment                                 |
|-------------------------------|---------------------------------------------|
| <a href="#">Miscellaneous</a> | <a href="#">Confirmation</a>                |
|                               | <a href="#">Environmental Conformations</a> |
|                               | <a href="#">Environmental Conformations</a> |

### Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
 Information- and Downloadcenter (Catalogs, Brochures,...)  
<http://www.siemens.com/lowvoltage/catalogs>  
 Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1921-2AD00>  
 Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8US1921-2AD00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=8US1921-2AD00](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1921-2AD00)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

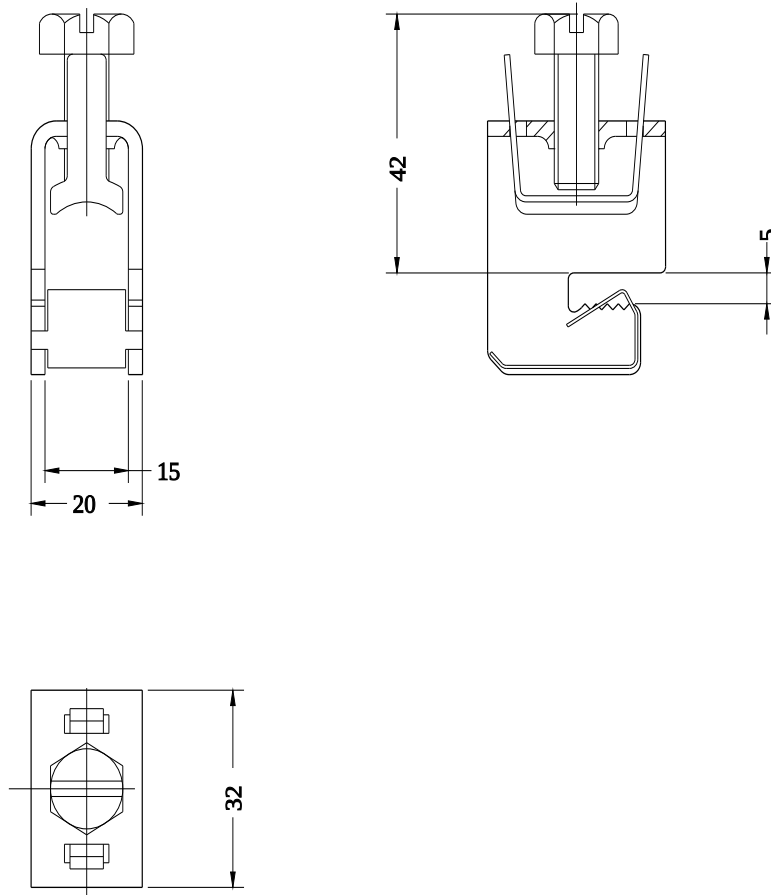

last modified:

7/9/2022 

