




Color :  White

UPC Code : 07847723998

Country Of Origin : Please Contact Customer Service

Available Colors :

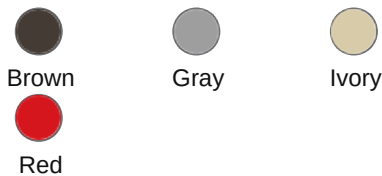

18203-W

3-Way Toggle Switch, Heavy-Duty Industrial Specification Grade, Canadian, 15 Amp, 347 Volt AC, Back or Side Wire, White

Technical Information

Electrical Specifications

Amperage : 15 A

Base Material : Thermoplastic

Contact Material : Silver Alloy

Cover Material : Thermoplastic

Dielectric Voltage :
Withstands 1500V for 1 minute

Endurance : 50,000 cycles
minimum

Overload UL20 Test : 100
cycles of OL at 4.8 times rated
current

Strap Material : Steel

Temperature Rise : Maximum
30 degrees C rise

Terminal Screws : Brass 8-32

Toggle : Polycarbonate

Voltage : 347 VAC

Material Specifications

Base Material : Thermoplastic

Body Material : Thermoplastic

Color : White

Contact Material : Silver Alloy

Cover Material : Thermoplastic

Device Type : Toggle Switch

Feature 4 : Canadian

Function : 3-Way

Grade : Heavy-Duty Industrial
Specification Grade

Strap Material : Steel

Terminal Screws : Brass 8-32

Toggle : Polycarbonate

Mechanical Specifications

Amperage : 15 A

Dielectric Voltage :
Withstands 1500V for 1 minute

Endurance : 50,000 cycles
minimum

Overload UL20 Test : 100
cycles of OL at 4.8 times rated
current

Product ID : Ratings are
permanently marked on device

Temperature Rise : Maximum
30 degrees C rise

Terminal Accom. : 14-#10
AWG back wired; #14-#12
AWG side wired

Terminal ID : Brass-Hot (If
Applicable) Black-Hot White-
Neutral Green-Gnd

Termination : Back or Side
Wire

Product Features

Color : White

Device Type : Toggle Switch

Feature 4 : Canadian

Function : 3-Way

Grade : Heavy-Duty Industrial
Specification Grade

Product ID : Ratings are
permanently marked on device

Terminal Accom. : 14-#10
AWG back wired; #14-#12
AWG side wired

Terminal ID : Brass-Hot (If
Applicable) Black-Hot White-
Neutral Green-Gnd

Termination : Back or Side
Wire

Torque Range : 12-14 inch
pounds

Torque Range : 12-14 inch
pounds

Voltage : 347 VAC

Standards and Certifications

ANSI : C-73

CSA C22.2 No. 111 : File
#152105

UL Fed Spec WS896E : File
#E7458

UL Standard : UL20

Warranty : 10-Year Limited

SPECIFICATION SUBMITTAL

JOB NAME: 	CATALOG NUMBERS: 	
JOB NUMBER: 		

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.
T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·
FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)
5386- 1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2024 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without
notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts

© 2024 Leviton Manufacturing Co., Inc.