


# LVT Low Voltage Thermostat Wire Plenum FT6

CSA/FT6

- Conductor** Solid bare copper
- Insulation** 300V Colour coded flame retardant PVC
- Jacket** Grey PVC
- Temperature** 60°C
- Approvals** UL listed CMP to harmonized standard C22.2 No.214 and UL 444  
Passes CSA/FT6 flame and smoke test  
Passes UL 910 flame and smoke test

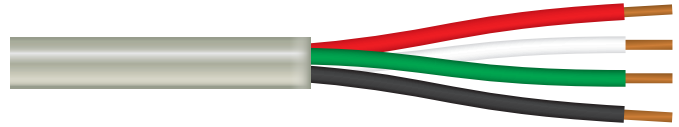

**Applications** Low voltage heating and air conditioning controls, thermostats, door bells and annunciator systems, intercom systems, burglar and fire alarms.

Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
42BA1802	18	2	Solid	0.008	0.015	0.130	16	1
42BA1803	18	3	Solid	0.008	0.015	0.158	22	1
42BA1804	18	4	Solid	0.008	0.015	0.167	28	1
42BA1805	18	5	Solid	0.008	0.015	0.190	34	1
42BA1806	18	6	Solid	0.008	0.015	0.204	40	1
42BA1807	18	7	Solid	0.008	0.015	0.204	46	1
42BA1808	18	8	Solid	0.008	0.015	0.222	52	1
42BA1810	18	10	Solid	0.008	0.015	0.271	65	1

**Chart No. 1 Multi-Conductor**

Cond. #	Colour
1	Black
2	White
3	Red
4	Green
5	Brown
6	Blue
7	Orange
8	Yellow
9	Purple
10	Grey
11	Pink
12	Tan

LVT\_FT6\_P.pdf