


Intrusion, Unshielded



AWG	Number of Conductors	Stranding	Shield	DC Resistance (Ohms/1000')	Nominal Capacitance (pF/ft.)	Nominal Outer Diameter (inches)	Average Weight (Pounds/1000')	Part Number
Plenum Rated (CMP/CL3P/FT6 Listed)								
22	2	7 Strand	Unshielded	16.90	26.0	0.116	8.7	3102
22	4	Solid	Unshielded	18.00	17.6	0.120	12.8	3103
22	4	7 Strand	Unshielded	16.90	26.0	0.133	14.4	3104
18	2	19 Strand	Unshielded	6.66	32.2	0.148	16.0	3114
18	4	19 Strand	Unshielded	6.66	32.2	0.172	28.3	3115
Riser Rated (CMR/CL3R/FT4 Listed)								
22	2	Solid	Unshielded	18.00	18.8	0.106	8.0	2101
22	2	7 Strand	Unshielded	16.90	18.5	0.116	9.2	2102
22	4	Solid	Unshielded	18.00	18.8	0.120	12.3	2103
22	4	7 Strand	Unshielded	16.90	18.5	0.135	13.4	2104
18	2	19 Strand	Unshielded	6.66	22.7	0.150	16.0	2114
18	4	19 Strand	Unshielded	6.66	22.7	0.174	28.1	2115

Intrusion, Shielded

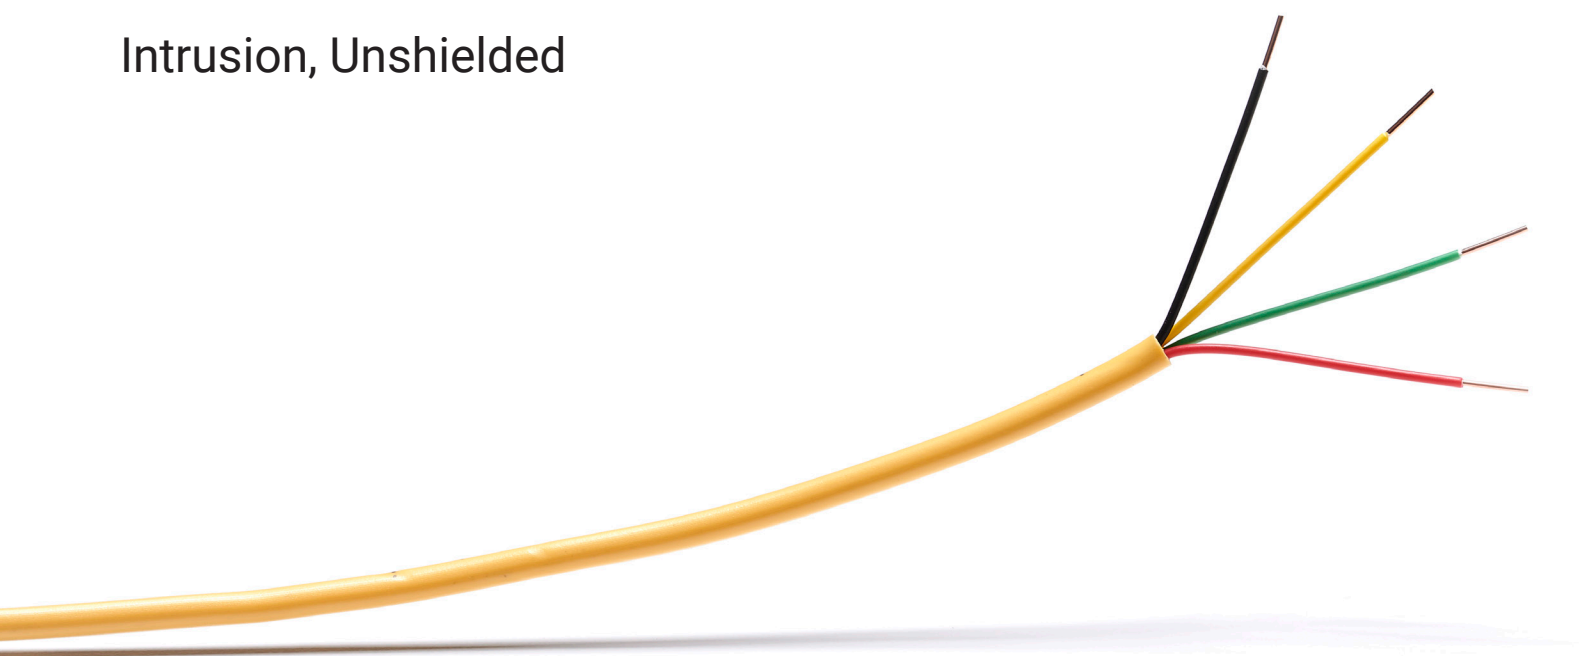

AWG	Number of Conductors	Stranding	Shield	DC Resistance (Ohms/1000')	Nominal Capacitance (pF/ft.)	Nominal Outer Diameter (inches)	Average Weight (Pounds/1000')	Part Number
Plenum Rated (CMP/CL3P/FT6 Listed)								
22	2	7 strand	Shielded	16.90	44.0	0.120	11.0	3202
22	4	7 strand	Shielded	16.90	39.2	0.137	17.0	3204
18	2	19 strand	Shielded	6.66	59.3	0.156	19.3	3214
18	4	19 strand	Shielded	6.66	50.8	0.182	32.2	3215
Riser Rated (CMR/CL3R/FT4 Listed)								
22	2	7 strand	Shielded	16.90	32.0	0.120	9.6	2202
22	4	7 strand	Shielded	16.90	28.2	0.141	15.6	2204
18	2	19 strand	Shielded	6.66	42.9	0.154	18.7	2214
18	4	19 strand	Shielded	6.66	36.3	0.180	31.4	2215