


Armoured Category 6 Cable

HDPE/PVC

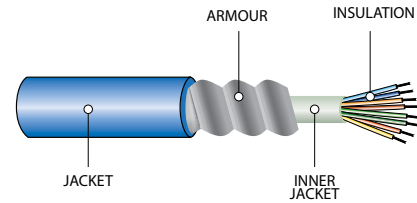

SPECIFICATIONS

- Riser Cable - CMR
- FT4**
- ANSI/TIA/EIA 568 B.2-1
- ANSI/TIA/EIA 862
- RoHS Compliant

-Refer to CE Code for details



CONSTRUCTION

Conductor: Solid bare annealed copper

Insulation: Polyolefin, Fluoropolymer, or high density Polyethylene (HDPE)

Shield: Belfoil Shield Tape (if applicable - see table below for applicability)

Drain Wire: Tinned copper

Inner Jacket: High Density Polyethylene (HDPE)

Armour: Aluminum Interlocked Armour (AIA)

Outer Jacket: Flame-retardant Polyvinyl Chloride (PVC)

Options: Other coloured outer jackets available upon request
 Individual or overall shielded pairs available upon request

Part Number	AWG Size		Approximate Diameter		Cable Weight		Minimum Bend Radius (in.)	Maximum Pulling Force (LB)	Insulation	Shield	Colour
	Pairs	Cond.	in.	mm.	LB/MFT	KG/KM					
13055-04-2010AIA	4	23	0.500	12.700	114	170	7	200	HDPE	No	Black
13055-04-2040AIA	4	23	0.500	12.700	114	170	7	200	HDPE	No	Blue
50-Y65901-040	4	23	0.680	17.272	173	257	6.8		Polyolefin	Yes	Black
50-Y66229-010	4	23	0.500	12.700	173	257	6.8		Polyolefin	Yes	Blue
50-1872A-010AIA**	4	23	0.688	17.475	154	229	8.25	200	Polyolefin	No	Black
50-1872A-040AIA**	4	23	0.688	17.475	154	229	8.25	200	Polyolefin	No	Blue
50-YC48122-040AIA	8	23	0.783	19.888	218	324	8	200	Polyolefin	No	Blue

*Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
 Specifications are subject to change without prior notice.*