


Armoured Category 5E Cable PVC/PVC



SPECIFICATIONS

- CSA FT4
 - ANSI/TIA/EIA 568 B.2
- Refer to CE Code for details

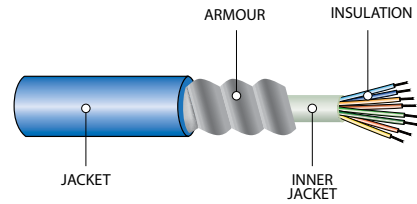

CONSTRUCTION

- Conductor:** Solid bare annealed copper
- Insulation:** Polyolefin, high density Polyethylene (HDPE) or Polyvinyl Chloride (PVC)
- Shield:** Aluminum/ Mylar Foil (if applicable - see table below for applicability)
- Inner Jacket:** Polyvinyl Chloride (PVC)
- Armour:** Aluminum Interlocked Armour (AIA)
- Outer Jacket:** Polyvinyl Chloride (PVC)
- Options:** Other coloured outer jacket available upon request

Part Number	AWG Size		Approximate Diameter		Cable Weight		Min. Bend Radius (in.)	Insulation	Shield	Colour
	Pairs	Cond.	in.	mm.	LB/MFT	KG/KM				
50-121700R-040AIA	4	24	0.530	13.462	102	152	6.5	Polyolefin	No	Blue
13055-04-5E4AIA	4	24	0.520	13.208	122	182	5.2	HDPE	No	Blue
13055-04-5E42AIA	8	24	0.701	17.805	154	229	7.2	HDPE	No	Blue
50-121702A	8	24	0.705	17.907	248	369	10.5	Polyolefin	No	Blue
50-YC45732-2X1702A	16	24	0.860	21.844	260	387	17.2	PVC	No	Blue
13075-04-5E40AIAB	4	24	0.580	14.732	145	216	5.8	Polyolefin	Yes	Blue
13075-04-5E42AIAB	8	24	0.833	21.158	316	470	10.0	Polyolefin	Yes	Blue

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
Specifications are subject to change without prior notice.