



Figure similar

SITOR fuse link, with blade contacts, NH00, In: 35 A, gR, Un AC: 690 V, Un DC: 440 V, front indicator

| Model                                                                  |                                                                               |
|------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| product brand name                                                     | SETRON                                                                        |
| product designation                                                    | SITOR fuse link                                                               |
| design of the product                                                  | with blade contacts without slots                                             |
| design of an identification indicator                                  | front indicator                                                               |
| design of the switching contact                                        | with blade contacts for mounting in LV HRC fuse bases or switch disconnectors |
| design of the fuse link                                                | SITOR, LV HRC design                                                          |
| General technical data                                                 |                                                                               |
| size of fuse system according to EN 60269-1                            | NH00                                                                          |
| operating class of the fuse link                                       | gR                                                                            |
| varying load factor (WL)                                               | 0.95                                                                          |
| type of voltage of the operating voltage                               | AC/DC                                                                         |
| operating voltage at AC according to UL rated value                    | 690 V                                                                         |
| Supply voltage                                                         |                                                                               |
| supply voltage                                                         |                                                                               |
| • at AC                                                                | 690 V                                                                         |
| • at DC                                                                | 440 V                                                                         |
| Breaking Capacity                                                      |                                                                               |
| switching capacity current                                             |                                                                               |
| • according to IEC 60947-2 rated value                                 | 100 kA                                                                        |
| Dissipation                                                            |                                                                               |
| power loss [W]                                                         | 9 W                                                                           |
| power loss [W]                                                         |                                                                               |
| • for rated value of the current at AC in hot operating state per pole | 9 W                                                                           |
| • maximum                                                              | 9 W                                                                           |
| Product details                                                        |                                                                               |
| product description                                                    | with blade contacts, silver-plated                                            |
| accessories included                                                   | no                                                                            |
| Mechanical Design                                                      |                                                                               |
| mounting position                                                      | Any, preferably vertical                                                      |
| net weight                                                             | 203 g                                                                         |
| Environmental conditions                                               |                                                                               |
| ambient temperature during operation                                   |                                                                               |
| • minimum                                                              | -20 °C                                                                        |
| • maximum                                                              | 50 °C                                                                         |
| environmental category                                                 | -20 to +50 at 95% relative humidity                                           |
| Approvals Certificates                                                 |                                                                               |
| General Product Approval                                               |                                                                               |



[Confirmation](#)



| Test Certificates                        | other                         | Environment                  |                               |                                             |                                             |
|------------------------------------------|-------------------------------|------------------------------|-------------------------------|---------------------------------------------|---------------------------------------------|
| <a href="#">Special Test Certificate</a> | <a href="#">Miscellaneous</a> | <a href="#">Confirmation</a> | <a href="#">Miscellaneous</a> | <a href="#">Environmental Confirmations</a> | <a href="#">Environmental Confirmations</a> |

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NE8003-1>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NE8003-1>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NE8003-1](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NE8003-1)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

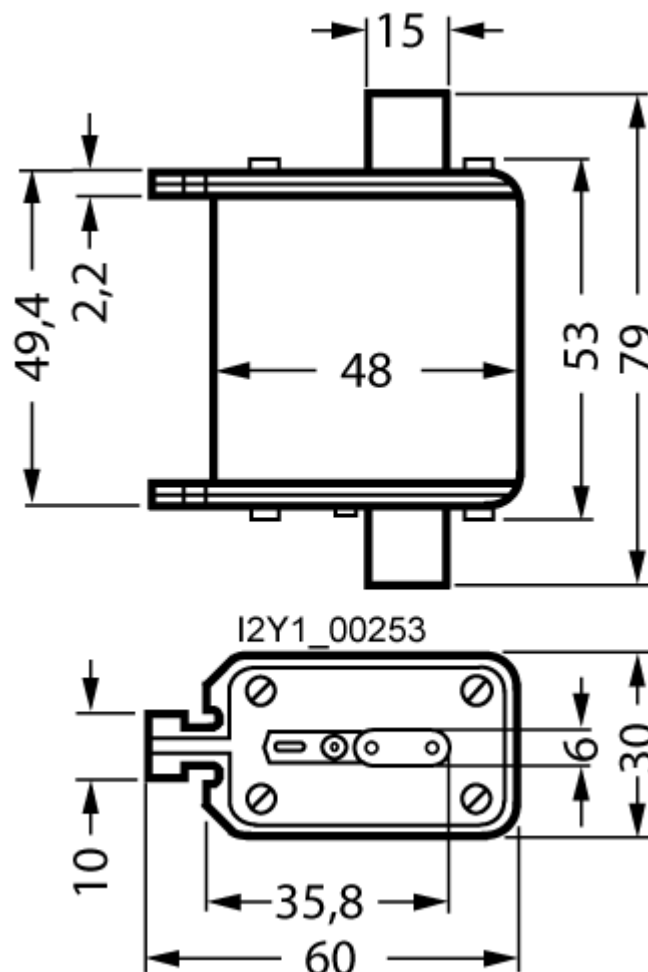

last modified:

8/8/2024



