


VitaLink MC/NCC Cable

Fire Resistive Instrumentation, LSZH, PVC

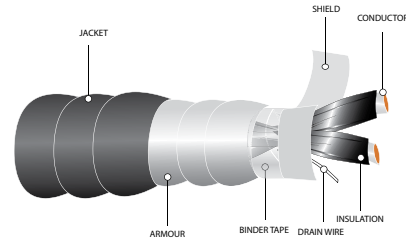

SPECIFICATIONS

• CSA, FT4

*Refer to CE Code for details



CONSTRUCTION

Conductor: Stranded nickel coated copper

Insulation: Low smoke zero halogen (LSZH)

Armour: Continuously welded and corrugated aluminum

Shield: Copper/Mylar Tape with drain ground (optional)

Outer Jacket Material: Polyvinyl Chloride (PVC) Black

Cable Temperature: 90°C dry, 75°C wet

Voltage: 600V

Options: Low smoke zero halogen polyolefin jacket and other colours and copper armour upon request. Connectors available upon request



Part Number	AWG Size	Number of Pairs	Shields	Stranding	Insulation Thickness (in.)	Approximate Diameter (in.)	Net Weight		Minimum Bending Radius (in.)
							LB/MFT	KG/KM	
26-VP02016-007	16	1	SP	19	0.030	0.760	200	298	4.750
26-VP02016-010	16	1	NS	19	0.030	0.720	178	265	4.500
26-VP04016-002	16	2	SPOS	19	0.030	1.070	361	537	6.800
26-VP08016-000	16	4	SPOS	19	0.030	1.230	479	713	8.000
26-VP16016-002	16	8	SPOS	19	0.030	1.560	771	1147	10.250
26-VP24016-006	16	12	SPOS	19	0.030	1.840	1080	1607	12.000

Refer to CEC for Ampacity

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.