


VitaLink 2000 Security Cable

Fire Resistant Control/Power, LSZH

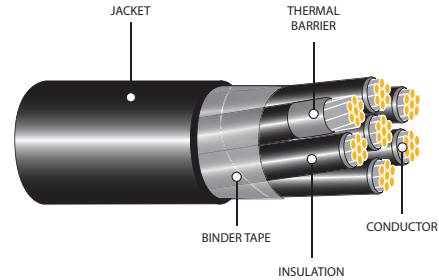

SPECIFICATIONS

- CSA R90 FT4
- CUL CIC TC RW90
- ABS for Marine Shipboard
- Sunlight Resistant
- API 2218/UL1709 Rapid Rise 2000F

*Refer to CE Code for details



CONSTRUCTION

Conductor: Stranded Nickel Coated Copper

Insulation: Low Smoke Zero Halogen (LSZH)

Outer Jacket: Low Smoke Zero Halogen (LSZH)

Voltage: 600V

Options: Other colours/constructions available upon request. Connectors available upon request



Part Number	AWG Size	Number of Conductors	Stranding	Insulation Thickness (in.)	Approximate Diameter (in.)	Net Weight		Min. Bending Radius (in.)
						LB/MFT	KG/KM	
26-VP03014-004	14	3	19	0.045	0.680	234	348	2.72
26-VP07014-002	14	7	19	0.045	0.930	442	658	3.72
26-VP02014-001	14	12	19	0.045	1.220	703	1046	5.00
26-VP02012-004	12	2	19	0.045	0.680	224	333	2.72
26-VP03012-006	12	3	19	0.045	0.720	273	406	2.88
26-VP04012-001	12	4	19	0.045	0.780	317	472	3.12
26-VP07012-003	12	7	19	0.045	0.980	525	781	3.92
26-VP02010-001	10	2	49	0.045	0.760	287	427	3.04
26-VP03010-002	10	3	49	0.045	0.800	355	528	3.20
26-VP04010-002	10	4	49	0.045	0.920	453	674	3.68
26-VP07010-004	10	7	49	0.045	1.100	692	1030	4.40

Refer to CEC for Ampacity

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.