


VitaLink MC 2-Hour Fire Rated Cable

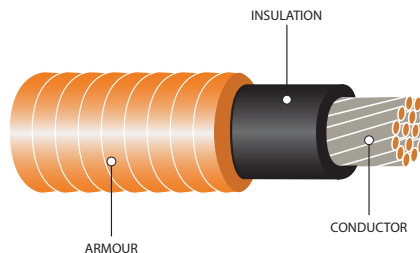

SPECIFICATIONS

- CSA RC90
- 2HR Fire Rated Per ULC S139 with hose stream, horizontal and vertical applications

*Refer to CE Code for details



CONSTRUCTION

- Conductor:** Annealed copper conductor
- Insulation:** Ceramifiable silicon insulation
- Armour:** Continuously welded and corrugated copper armour
- Cable Temperature:** 90°C Wet
- Voltage:** 600V
- Options:** Connectors and brass plates available upon request



Part Number	AWG Size	Number of Conductors	Approximate Diameter (in.)	Approximate Diameter (mm.)	Net Weight	
					LB/MFT	KG/KM
26-VM031X0-500	1/0	3	1.67	42.42	1990	2961
26-VM032X0-500	2/0	3	1.80	45.72	2345	3489
26-VM033X0-500	3/0	3	1.92	48.77	2755	4099
26-VM034X0-500	4/0	3	2.04	51.82	3305	4917
26-VM03250-500	250	3	2.26	57.40	3870	5758
26-VM03350-500	350	3	2.48	62.99	5015	7462
26-VM03500-500	500	3	2.82	71.63	6720	9999
26-VM04014-500	14	4	0.89	22.61	480	714
26-VM04012-500	12	4	0.94	23.88	575	856
26-VM04010-500	10	4	1.00	25.40	635	945
26-VM04008-500	8	4	1.16	29.46	8.15	12
26-VM04006-500	6	4	1.22	30.99	990	1473
26-VM04004-500	4	4	1.35	34.29	1285	1912
26-VM04003-500	3	4	1.41	35.81	1475	2195
26-VM04002-500	2	4	1.50	38.10	1710	2544
26-VM04001-500	1	4	1.73	43.94	2485	3697
26-VM041X0-500	1/0	4	1.82	46.23	2485	3697
26-VM042X0-500	2/0	4	1.95	49.53	2935	4367
26-VM043X0-500	3/0	4	2.12	53.85	3530	5252
26-VM044X0-500	4/0	4	2.26	57.40	4205	6257
26-VM04250-500	250	4	2.46	62.48	4925	7328
26-VM04350-500	350	4	2.71	68.83	6420	9552
26-VM04500-500	500	4	3.13	79.50	8740	13004

Refer to CEC for Ampacity

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.