


VitaLink TC/NCC Cable

Fire Resistive Control Power, LSZH

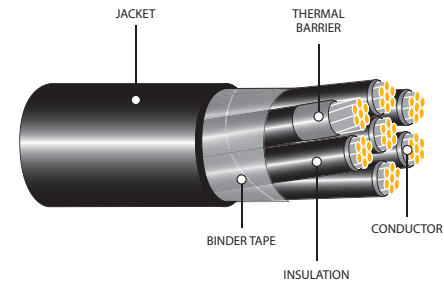

SPECIFICATIONS

- CSA R90 FT4
- CUL CICTC
- ABS for Marine Shipboard
- Sunlight Resistance
- Third Party Fire Test (RCSS) IEC 60331 Modified 2000°F

*Refer to CE Code for details



CONSTRUCTION

Conductor: Stranded nickel coated copper

Insulation: Low smoke zero halogen (LSZH)

Outer Jacket Material: Low smoke zero halogen (LSZH). Polyolefin

Cable Temperature: 90°C dry, 75°C wet

Voltage: 600V

Options: Other colours/constructions available upon request. Connectors available upon request



Part Number	AWG Size	Number of Conductors	Stranding	Insulation Thickness	Approximate Diameter	Net Weight		Minimum Bending Radius (in.)
				in.	in.	LB/MFT	KG/KM	
26-VP03014-000	14	3	19	0.045	0.570	175	260	2.28
26-VP04014-000	14	4	19	0.045	0.600	220	329	2.50
26-VP07014-000	14	7	19	0.045	0.720	316	470	3.00
26-VP12014-000	14	12	19	0.045	0.990	514	765	4.00
26-VP02012-000	12	2	19	0.045	0.560	171	254	2.25
26-VP03012-000	12	3	19	0.045	0.590	209	340	2.50
26-VP04012-000	12	4	19	0.045	0.640	242	360	2.75
26-VP02010-000	10	2	49	0.045	0.640	222	330	2.75
26-VP03010-000	10	3	49	0.045	0.680	277	412	2.75
26-VP04010-000	10	4	49	0.045	0.750	327	487	3.00
26-VP07010-000	10	7	49	0.045	0.940	551	820	4.00
26-VP03008-005	8	3	133	0.060	0.930	536	798	3.75
26-VP04008-003	8	4	133	0.060	1.020	585	870	4.25
26-VP03004-005	6	3	133	0.060	1.010	672	1000	4.04
26-VP04006-002	6	4	133	0.060	1.160	779	1160	4.75
26-VP03004-002	4	3	133	0.060	1.140	894	1330	4.56
26-VP04004-003	4	4	133	0.060	1.260	1052	1565	5.04
26-VP03002-001	2	3	665	0.060	1.270	1230	1830	5.08
26-VP04002-001	2	4	665	0.060	1.410	1430	2128	5.64

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

Refer to CEC for Ampacity