

DATA SHEET

VBII Heavy Duty Safety Switch with Viewing Window


200A, 600V, Type 12¹ and 4/4X

Standards and Ratings

- UL and CUL Listed under file #E4776
- Meets UL98 for switches and UL50 for enclosures
- Meets NEMA Standard KS-1 for enclosed switches
- Rated 10,000 AIC with Class H fuses or 200,000 AIC with Class R, T and J fuses
- Rated 100,000 AIC at 600Vdc with Class R or J fuses
- I²t rated (Amps² x Seconds = 500,000)
- 12X overload current rating exceeds standard 10X industry standard
- Suitable for use as service entrance equipment in the US

Features

- Quick-make and break switching action
- Double break visible blade design
- Highly visible ON/OFF indication
- Rugged installer friendly enclosure design
- Window permits viewing of both visible blades and indicating type fuses
- Modular design allows quick and easy replacement of parts
- Front removable lugs which can easily be converted to copper body or compression type lugs
- Defeatable dual cover interlock

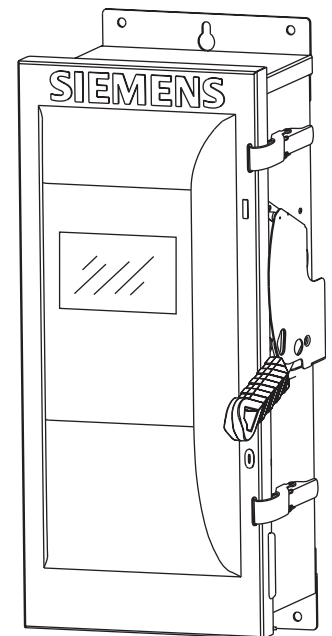

SIEMENS

Product Specifications

Heavy Duty 200A, 600V Type 12¹ and 4/4X

General Information

Catalog Number	Volts	Description	Shipping Weight (lbs.)
Type 12 Industrial ¹			
HF364JW	600	3 Pole, 3 Wire Fusible	53
HNF364JW	600	3 Pole, 3 Wire Non-Fusible	51
Type 4/4X Stainless Steel			
HF364SW	600	3 Pole, 3 Wire, Fusible	56
HF364SSW ⁵	600	3 Pole, 3 Wire, Fusible	56
HNF364SW	600	3 Pole, 3 Wire Non-Fusible	55
HNF364SSW ⁵	600	3 Pole, 3 Wire Non-Fusible	55

Horsepower Ratings^{2 3} – 600 Volts

Catalog Number	3 Phase, 480V AC		3 Phase, 600V AC		600V DC
	Std	Max	Std	Max	
HF364JW	50	125	60	150	50
HF364SW & HF364SSW	50	125	60	150	50
HNF364JW ⁴	—	125	—	150	50
HNF363SW & HNF363SSW ⁴	—	125	—	150	50

Mechanical Lug Wire Range (75°C, Cu/Al)

Description	Wire Range
Line, Load, Neutral	#6 AWG - 300 Kcmil
200% and Standard Neutral Ground	#14-1/0AWG
Ground Lug Kit	#14-4 AWG
200% Neutral	(2) #6 AWG - 300 Kcmil

Compression Lugs

Wire Size	Burdny		Thomas-Betts		IISCO	
	CU Only	CU/AL	CU Only	CU/AL	CU Only	CU / AL
#2	YA2C-L Box	YA2CA1	54142-TB	60117	CRB-2	IACL-2
	YA2C				CRB-2L	ACN-2
#1	YA1C-L Box	YA1CA1	54147 54947BE	60123	CRA-1-38	ACN-1
	YA1C				CRA-1L	
1/0	YA25-L Box	YA25A1	54153-TB 54949BE	60129 61130	CRA-0	IACL-1/0
	YA25				CRA-1/0L	ACN-1/0
2/0	YA26-L3	YA26A6	54158 256-30695-1229 54910BE	60135 61136	CRA-2/0	ACL-2/0
	YA26				CRA-2/0L	IACL-2/0
3/0	YA27-L3	YA27A1	54163-TB	60141 61142	CRC-3/0	IACL-3/0
	YA27				CRB-3/0L	ACL-3/0
4/0	YA28-L3	YA28A1	54168 256-30695-1253	61148 60147	CRC-4/0	IACL-4/0
	YA28-TC38				CRB-4/0L	ACL-4/0
250 Kcmil	YA29-L7	—	54173 54913BE	61156	CRA-250	IACL-250
300 Kcmil	—	—	—		CRA-250L	
				61162	—	—

¹ Also rated 3R/3S for outdoor use.

² Dual horsepower ratings: Std – applies when non-time delay fuses are installed.

Max – applies when time-delay fuses are installed.

³ Horsepower ratings listed also apply to Design E motors with no derating.

⁴ Also rated 60 HP on 3phase, 240V AC systems.

⁵ The enclosure of catalog numbers HF364SSW and HNF364SSW is constructed from 316 grade stainless steel.

⁶ Place “DOOR” at the end of the switch catalog number.

Accessories


Catalog Number	Description
HSK64B	Add-on internal line-side barrier for service entrance application (per NEC 230.62)
HA161234	One Normally Open and Closed Auxiliary Switches
HA261234	Two Normally Open and Closed Auxiliary Switches
HA361234	Low Voltage Auxiliary Switch
HG61234	Equipment Ground Lug Kit (Factory installed)
HG261234	Isolated Equipment Ground Lug Kit
HN64	Fuse Puller (3 per kit)
HN264	200% Neutral Kit
HT64	600 Volt Class T Fuse Clip Kit (1-Pole per kit)
HR64	Class R Fuse Clip Kit (3 fuse clips per kit)
HLC64	Copper Lug Kit (9 lugs per kit)
SSH200	2.00” Type 12 and 4X Hub

Replacement Parts

Catalog Number	Description
HFB64	Fusible Line Side Replacement Base (HF364JW, HF364SW)
HBB64	Fusible Load Side Replacement Base (HF364JW, HF364SW)
HNB64	Non-Fusible Replacement Base (HNF363JW, HNF363SW)
HH64	Replacement Handle/Handle Guard (HH64S for Type 4X)
HL64	Replacement Lugs (3 lugs per kit)
HM6123	Replacement Mechanism (HM64S for Type 4X)
⁶	Replacement Door

Dimension Drawings

Heavy Duty 200A, 600V Type 12¹ and 4/4X

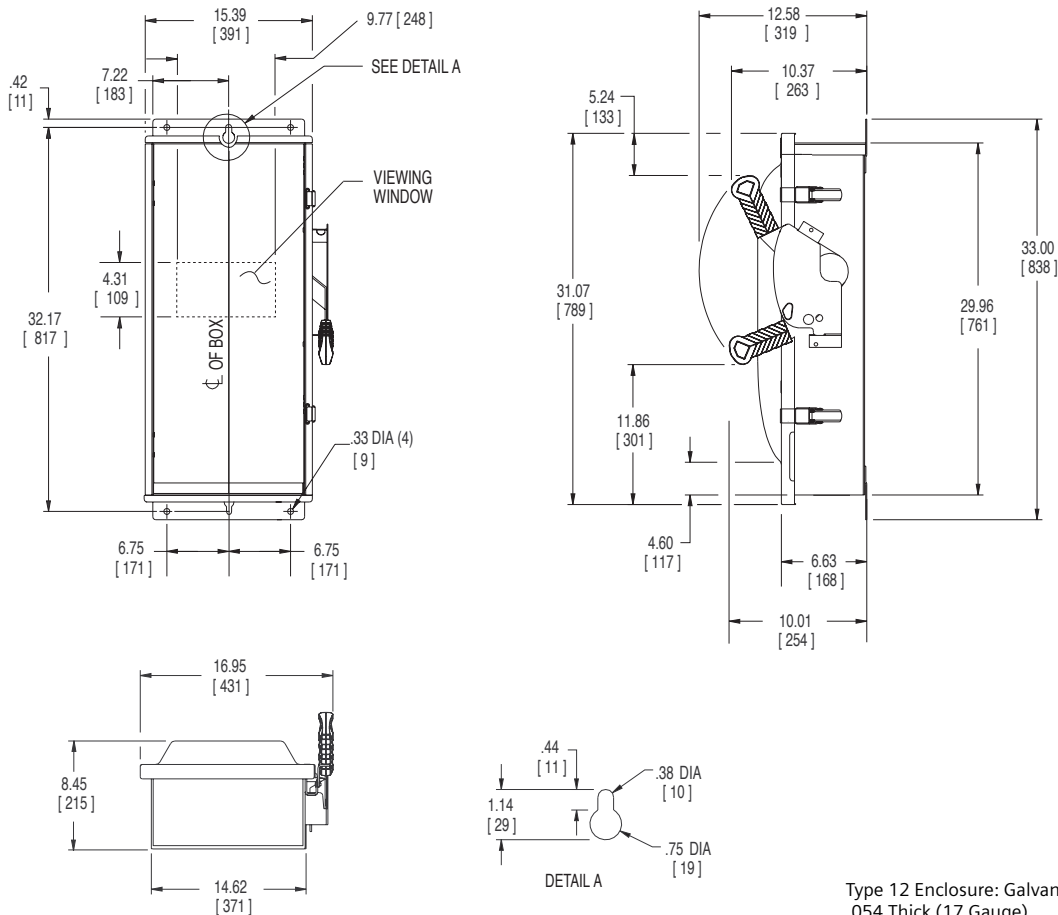

No knockouts in enclosures.
Dimensions shown in inches and millimeters ().
Dimension shown accurate to $\pm 1/8$ inch.

	LINE SIDE WIRE BEND	LOAD SIDE WIRE BEND
600V fused	6.07 (154)	6.10 (155)
Non-Fused	6.07 (154)	11.46 (291)

Type 12 Enclosure: Galvanized Steel
.054 Thick (17 Gauge)
Finish: ANSI Grey #61 Paint

HF364SW and HNF364SW
Type 4X Enclosure: 304 Stainless Steel
.055 Thick (17 Gauge)

HF364SSW and HNF364SSW
Type 4X Enclosure: 316 Stainless Steel
.055 Thick (17 Gauge)

Published by
Siemens Canada Limited
1577 North Service Road East
Oakville, ON L6H 0H6
Canada

Printed in Canada
© 2024 Siemens Canada Limited

This document contains a general description of available technical options only, and its effectiveness will be subject to specific variables including field conditions and project parameters. Siemens does not make representations, warranties, or assurances as to the accuracy or completeness of the content contained herein. Siemens reserves the right to modify the technology and product specifications in its sole discretion without advance notice.