



busbar adapter 60 mm SYS. UL 508 Busbar system 60 mm Bar thickness: TT profile UL rating 240-600V/250A Can be used in spring circuits IEC rating 690 V/250 A for 3VL circuit breaker with pipe contacting for cable outlet top/bottom Adapter length 190 mm Adapter width 105 mm for VL150 UL DG-FRAME for VL250 UL FG-FRAME

Model	
product brand name	SETRON
product designation	Device adapter
design of the product	Accessories
Connections	
type of electrical connection	Tubular contacts
Mechanical Design	
height	190 mm
width of the adapter	105 mm
depth	88 mm
thickness of the busbar	
• minimum	5 mm
busbar center-to-center spacing	60 mm
net weight	969 g
Approvals Certificates	
General Product Approval	




[Confirmation](#)



Test Certificates	Marine / Shipping	other	Environment		
Miscellaneous		Confirmation	Miscellaneous	Environmental Con- firmations	Environmental Con- firmations

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1213-4AQ03 Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/8US1213-4AQ03 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1213-4AQ03 CAX-Online-Generator http://www.siemens.com/cax Tender specifications

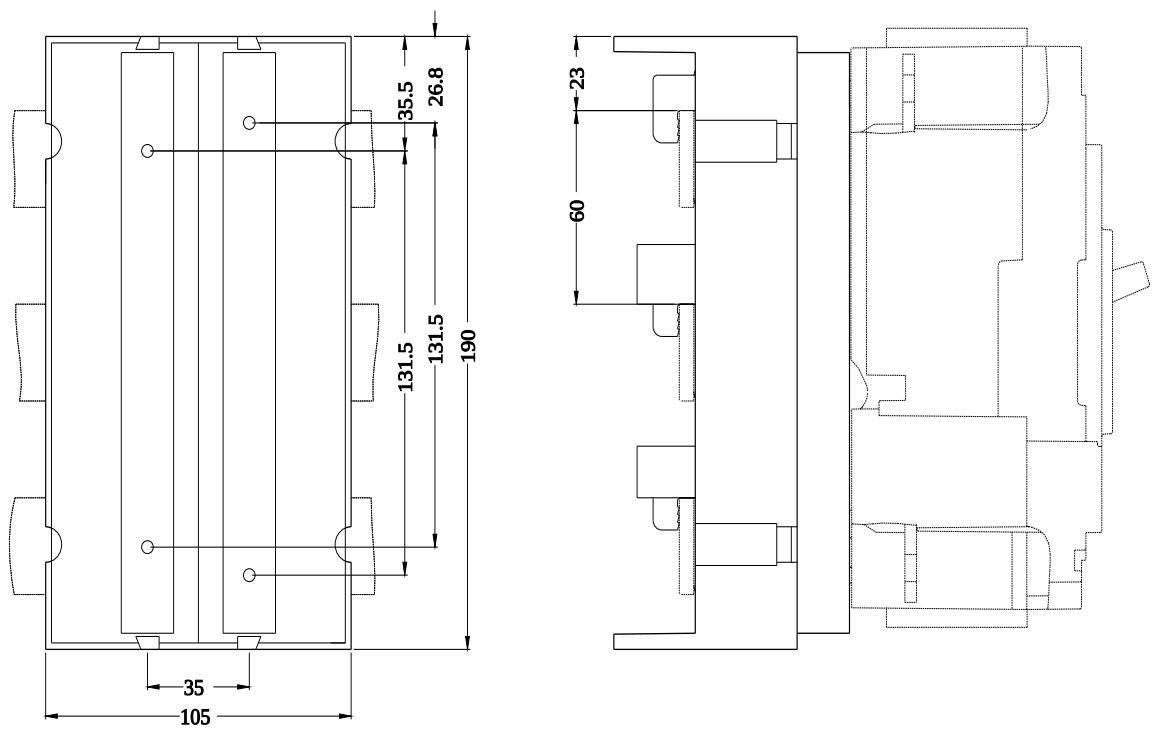

last modified:

5/29/2021 

