

## LED SLIM LIGHTS


### SLIM4CONT-5CCT

#### HIGHLIGHTS

##### 4" Ultra Slim LED Downlight With Adjustable CCT (pack of 6)

- Edge-lit Technology, No Glare Or Dark Spots, Instant-on
- No Existing Recessed Housing Or Junction Box Required
- Dimming: Triac Down To 10%
- I.C. Rated For Direct Contact With Insulation (indoor only)
- Suitable For Wet Location (indoor only)
- Rated For A Long Life - Over 50,000 Hours
- FT6 cable (plenum rated)
- 5-color Field Selectable CCT- 2700K, 3000K, 3500K, 4000K, 5000K

#### DIMENSIONS

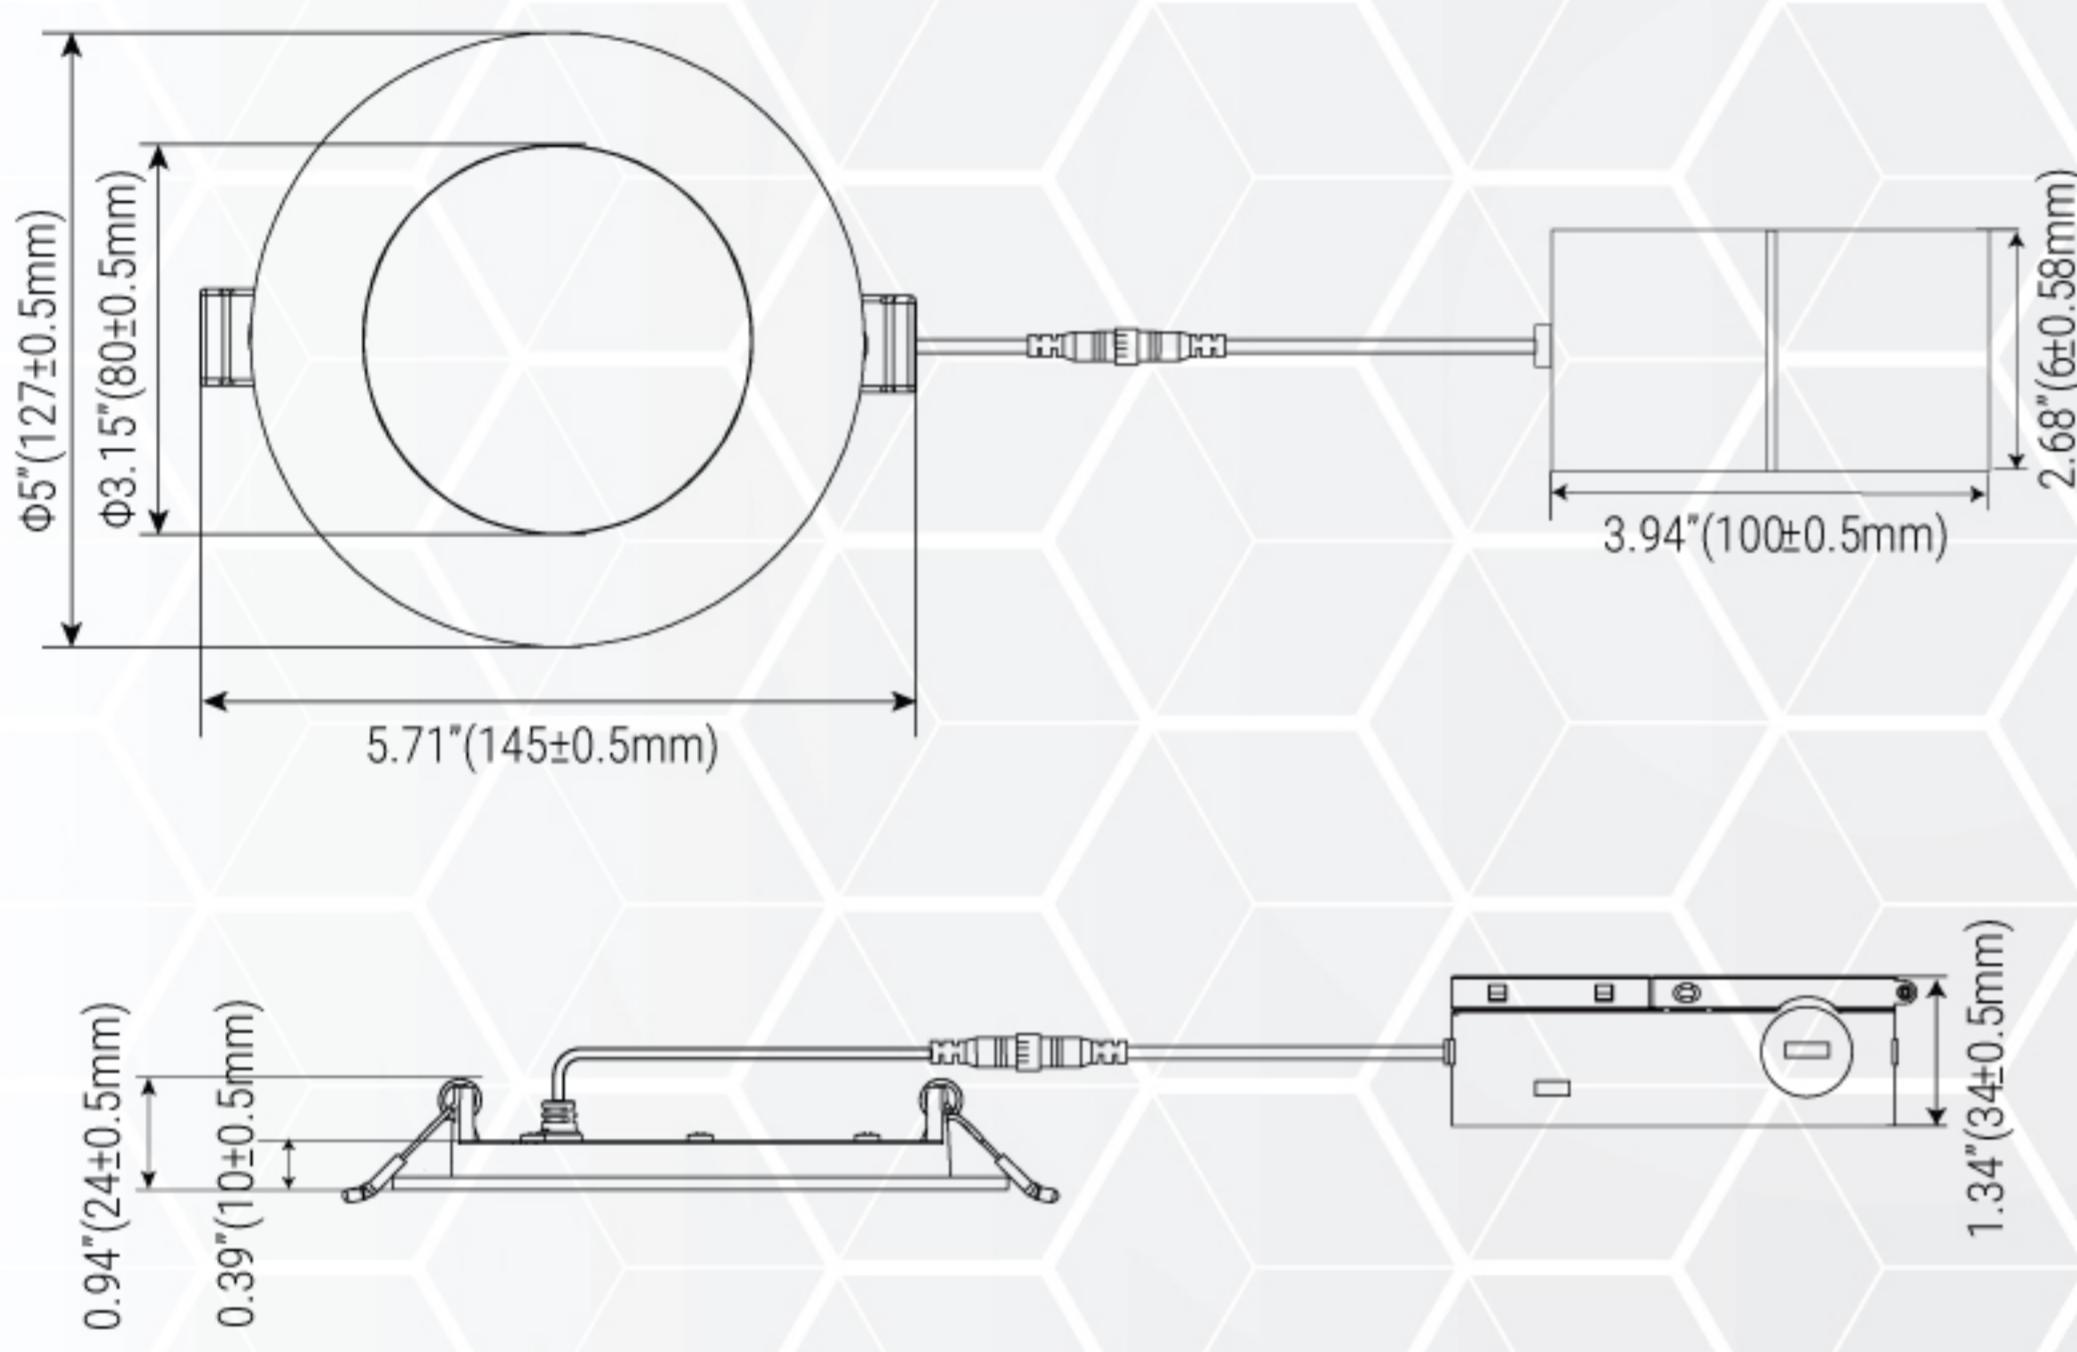

#### SPECIFICATIONS

Model	SLIM4CONT-5CCT
Wattage	10W
Voltage	AC120V, 60Hz
Lumens	934 lmn
Beam Angle	120°
Lifetime   Warranty	50000 hours   5 years
Air Tight	Yes
Rating	IC rated   Indoor location
Grade of Protection	Suitable For Wet Locations (indoor only)
CRI	90+
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Dimming	Triac Dimming
Operating Temp.	-20°C ~ +45°C
Case Quantities	4

## LED SLIM LIGHTS

### SLIM4CONT-5CCT

#### INSTALLATION

- Suitable for most new constructions.
- Install J-Box in ceiling beam, and insert light right into drywall opening



#### DECORATIVE TRIMS



SLIM4-RINGBK



SLIM4-RINGSN



SLIM4-RINGCH



SLIM4-RINGVB



SLIM4-RINGCBK



SLIM4-RINGCP



SLIM4-RINGBR

#### ACCESSORIES (SOLD SEPARATELY)

##### MOUNTING PLATE



**PLATE13-4A, PLATE13-4A-L,  
PLATE26-4A, PLATE26-4A-L**  
4" New Construction Plate made  
up of galvanized steel for recessed  
lighting



**PLATE4A-HB**  
Galvanized steel Mounting Plate with  
hanger bars for ORTECH 4" LED  
lights

##### FLEXIBLE CONNECTOR



**CORD-B24/B120**  
Flexible Connector  
2FT/10FT



Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.